# ULTRIX SCSI/CAM Architecture

## Guide to Writing Device Drivers for the ULTRIX SCSI/CAM Architecture Interfaces

Order Number: AA-PN5HA-TE

January 1992

| | |
|---|---|
| Product Version: | SCSI/CAM for ULTRIX RISC Version 4.2, Version 1.0, SCSI/CAM for ULTRIX RISC Version 4.2A, Version 1.0 |
| Operating System and Version: | ULTRIX Version 4.2 (RISC), ULTRIX Version 4.2A (RISC) |


This manual describes the SCSI/CAM Architecture interfaces. It also describes how to write device drivers for the SCSI/CAM implementation..

**digital equipment corporation**
**Maynard, Massachusetts**

Restricted Rights: Use, duplication, or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013.

© Digital Equipment Corporation 1991
All rights reserved.

The information in this document is subject to change without notice and should not be construed as a commitment by Digital Equipment Corporation. Digital Equipment Corporation assumes no responsibility for any errors that may appear in this document.

The software described in this document is furnished under a license and may be used or copied only in accordance with the terms of such license.

No responsibility is assumed for the use or reliability of software on equipment that is not supplied by Digital or its affiliated companies.

The following are trademarks of Digital Equipment Corporation:

ALL-IN-1, Bookreader, CDA, DDIF, DDIS, DEC, DECnet, DECstation, DECsystem, DECUS, DECwindows, DTIF, MASSBUS, MicroVAX, Q-bus, ULTRIX, ULTRIX Mail Connection, ULTRIX Worksystem Software, UNIBUS, VAX, VAXstation, VMS, VT, XUI, and the DIGITAL logo.

UNIX is a registered trademark of UNIX System Laboratories, Inc.

# Contents

## About This Manual


Audience ..... xvii

Organization ..... xvii

Related Documentation ..... xviii

Conventions ..... xix


## 1 ULTRIX SCSI/CAM Software Architecture


1.1 Overview ..... 1–1

1.2 CAM User Agent Device Driver ..... 1–3

1.3 SCSI/CAM Peripheral Device Drivers ..... 1–4

1.3.1 USCA Common Device Driver Modules ..... 1–4
1.3.2 USCA Generic Device Driver Modules ..... 1–5
1.3.3 CAM SCSI Disk Device Driver Modules ..... 1–5
1.3.4 CAM SCSI Tape Device Driver Modules ..... 1–5
1.3.5 CAM SCSI CDROM/AUDIO Device Driver Modules ..... 1–5

1.4 SCSI/CAM Special I/O Interface ..... 1–5

1.5 The SCSI/CAM Configuration Driver ..... 1–5

1.6 CAM Transport Layer (XPT) ..... 1–6

1.7 SCSI Interface Module Layers (SIM) ..... 1–6


## 2 CAM User Agent Modules


2.1 User Agent Introduction ..... 2–1

2.2 User Agent Error Handling ..... 2–1

2.3 User Agent Data Structures ..... 2–2

2.3.1 The UAGT_CAM_CCB Data Structure ..... 2–2

2.3.1.1 The uagt_ccb Member ..... 2–3
2.3.1.2 The uagt_ccblen Member ..... 2–3

2.3.1.3 The uagt_buffer Member ..... 2–3
2.3.1.4 The uagt_buflen Member ..... 2–3
2.3.1.5 The uagt_snsbuf Member ..... 2–3
2.3.1.6 The uagt_snslen Member ..... 2–3
2.3.1.7 The uagt_cdb Member ..... 2–3
2.3.1.8 The uagt_cdblen Member ..... 2–3
2.3.1.9 The uagt_flags Member ..... 2–4

2.3.2 The UAGT_CAM_SCAN Data Structure ..... 2–4

2.4 User Agent Routines ..... 2–4

2.4.1 The uagt_open Routine ..... 2–4
2.4.2 The uagt_close Routine ..... 2–4
2.4.3 The uagt_ioctl Routine ..... 2–5

2.5 Sample User Agent Drivers ..... 2–5

2.5.1 Sample User Agent Driver Inquiry Program ..... 2–5

2.5.1.1 The Include Files and Definitions Section ..... 2–5
2.5.1.2 The Main Program Section ..... 2–6
2.5.1.3 The User Agent Open Section ..... 2–7
2.5.1.4 Filling in XPT_SCSI_IO Request CCB_HEADER Fields ..... 2–7
2.5.1.5 Filling in INQUIRY Command CCB_HEADER Fields ..... 2–8
2.5.1.6 Filling in the UAGT_CAM_CCB Fields ..... 2–9
2.5.1.7 Sending the CCB to the CAM Subsystem ..... 2–9
2.5.1.8 Print INQUIRY Data Routine ..... 2–10
2.5.1.9 Print CAM Status Routine ..... 2–12
2.5.1.10 Sample Output for a Valid Nexus ..... 2–14
2.5.1.11 Sample Output for an Invalid Nexus ..... 2–14

2.5.2 Sample User Agent Scanner Driver Program ..... 2–15

2.5.2.1 Scanner Program Header File ..... 2–15
2.5.2.2 The Include Files Section ..... 2–16
2.5.2.3 The CDB Setup Section ..... 2–16
2.5.2.4 The Definitions Section ..... 2–17
2.5.2.5 The Main Program Section ..... 2–17
2.5.2.6 The Nexus Conversion Section ..... 2–19
2.5.2.7 The Parameter Assignment Section ..... 2–20
2.5.2.8 The Data Structure Setup Section ..... 2–21
2.5.2.9 The Window Parameters Setup Section ..... 2–23
2.5.2.10 CCB Setup for the DEFINE WINDOW Command ..... 2–24
2.5.2.11 The Error Checking Section ..... 2–26
2.5.2.12 CCB Setup for the READ Command ..... 2–29
2.5.2.13 The Read and Write Loop Section ..... 2–30
2.5.2.14 The Local Function Definition Section ..... 2–32

## 3 USCA Common Modules


3.1 Common SCSI Device Driver Data Structures ..... 3–1

3.1.1 Peripheral Device Unit Table ..... 3–1
3.1.2 Peripheral Device Structure ..... 3–2

3.1.2.1 The pd_dev Member ..... 3–2
3.1.2.2 The pd_spec_size Member ..... 3–3

3.1.3 Device Descriptor Structure ..... 3–3
3.1.4 Mode Select Table Structure ..... 3–3
3.1.5 Density Table Structure ..... 3–4

3.1.5.1 The den_blocking Member ..... 3–4

3.1.6 SCSI/CAM Peripheral Device Driver Working Set Structure ..... 3–4

3.1.6.1 The pws_flink Member ..... 3–4
3.1.6.2 The pws_blink Member ..... 3–4
3.1.6.3 The pws_ccb Member ..... 3–5

3.2 Common SCSI Device Driver Macros ..... 3–5

3.3 Common SCSI Device Driver Routines ..... 3–6

3.3.1 Common I/O Routines ..... 3–8

3.3.1.1 The ccmn_init Routine ..... 3–8
3.3.1.2 The ccmn_open_unit Routine ..... 3–8
3.3.1.3 The ccmn_close_unit Routine ..... 3–8

3.3.2 Common Queue Manipulation Routines ..... 3–8

3.3.2.1 The ccmn_send_ccb Routine ..... 3–9
3.3.2.2 The ccmn_rem_ccb Routine ..... 3–9
3.3.2.3 The ccmn_abort_que Routine ..... 3–9
3.3.2.4 The ccmn_term_que Routine ..... 3–9

3.3.3 Common CCB Management Routines ..... 3–10

3.3.3.1 The ccmn_get_ccb Routine ..... 3–10
3.3.3.2 The ccmn_rel_ccb Routine ..... 3–10
3.3.3.3 The ccmn_io_ccb_bld Routine ..... 3–11
3.3.3.4 The ccmn_gdev_ccb_bld Routine ..... 3–11
3.3.3.5 The ccmn_sdev_ccb_bld Routine ..... 3–11
3.3.3.6 The ccmn_sasy_ccb_bld Routine ..... 3–11
3.3.3.7 The ccmn_rsq_ccb_bld Routine ..... 3–11
3.3.3.8 The ccmn_pinq_ccb_bld Routine ..... 3–11
3.3.3.9 The ccmn_abort_ccb_bld Routine ..... 3–12
3.3.3.10 The ccmn_term_ccb_bld Routine ..... 3–12
3.3.3.11 The ccmn_bdr_ccb_bld Routine ..... 3–12
3.3.3.12 The ccmn_br_ccb_bld Routine ..... 3–12

3.3.4 Common SCSI I/O Command Building Routines ..... 3–12

3.3.4.1 The ccmn_tur Routine ..... 3–13

3.3.4.2 The ccmn_start_unit Routine ..... 3–13
3.3.4.3 The ccmn_mode_select Routine ..... 3–13
3.3.5 Common CCB Status Routine ..... 3–13
3.3.6 Common Buf Structure Pool Management Routines ..... 3–14
3.3.6.1 The ccmn_get_bp Routine ..... 3–14
3.3.6.2 The ccmn_rel_bp Routine ..... 3–14
3.3.7 Common Data Buffer Pool Management Routines ..... 3–14
3.3.7.1 The ccmn_get_dbuf Routine ..... 3–14
3.3.7.2 The ccmn_rel_dbuf Routine ..... 3–14
3.3.8 Miscellaneous Common Routines ..... 3–14
3.3.8.1 The ccmn_ccbwait Routine ..... 3–15
3.3.8.2 The ccmn_DoSpecialCmd Routine ..... 3–15
3.3.8.3 The ccmn_SysSpecialCmd Routine ..... 3–15
3.3.8.4 The ccmn_errlog Routine ..... 3–15

## 4 USCA Generic Modules

4.1 Prerequisites for Using the CAM Generic Routines ..... 4–1
4.1.1 Ioctl Commands ..... 4–1
4.1.2 Error Handling ..... 4–2
4.1.3 Kernel Interface ..... 4–2
4.2 Data Structures Used by Generic Routines ..... 4–2
4.2.1 The Generic-Specific Structure ..... 4–2
4.2.1.1 The gen_flags Member ..... 4–2
4.2.1.2 The gen_state_flags Member ..... 4–3
4.2.1.3 The gen_resid Member ..... 4–3
4.2.2 The Generic Action Structure ..... 4–3
4.2.2.1 The act_ccb Member ..... 4–3
4.2.2.2 The act_ret_error Member ..... 4–4
4.2.2.3 The act_fatal Member ..... 4–4
4.2.2.4 The act_ccb_status Member ..... 4–4
4.2.2.5 The act_scsi_status Member ..... 4–4
4.2.2.6 The act_chkcond_error Member ..... 4–4
4.3 Generic I/O Routines ..... 4–4
4.3.1 The cgen_open Routine ..... 4–5
4.3.2 The cgen_close Routine ..... 4–5
4.3.3 The cgen_read Routine ..... 4–5
4.3.4 The cgen_write Routine ..... 4–6
4.3.5 The cgen_strategy Routine ..... 4–6
4.3.6 The cgen_ioctl Routine ..... 4–6

4.4 Generic Internal Routines ..... 4–6

4.4.1 The cgen_ccb_chkcond Routine ..... 4–7
4.4.2 The cgen_done Routine ..... 4–7
4.4.3 The cgen_iodone Routine ..... 4–7
4.4.4 The cgen_async Routine ..... 4–7
4.4.5 The cgen_minphys Routine ..... 4–8
4.4.6 The cgen_slave Routine ..... 4–8
4.4.7 The cgen_attach Routine ..... 4–8

4.5 Generic Command Support Routines ..... 4–8

4.5.1 The cgen_ready Routine ..... 4–8
4.5.2 The cgen_open_sel Routine ..... 4–9
4.5.3 The cgen_mode_sns Routine ..... 4–9

## 5 CAM Data Structures

5.1 CAM Control Blocks ..... 5–1

5.1.1 The CCB_HEADER Structure ..... 5–2

5.1.1.1 The my_addr and cam_ccb_len Members ..... 5–2
5.1.1.2 The cam_func_code Member ..... 5–2
5.1.1.3 The cam_status Member ..... 5–3

5.2 I/O Data Structure ..... 5–4

5.2.1 The CCB_SCSIIO Structure ..... 5–4
5.2.2 The CDB_UN Structure ..... 5–5

5.3 Control CCB Structures ..... 5–5

5.3.1 The CCB_RELSIM Structure ..... 5–5
5.3.2 The CCB_SETASYNC Structure ..... 5–5
5.3.3 The CCB_ABORT Structure ..... 5–6
5.3.4 The CCB_RESETBUS Structure ..... 5–6
5.3.5 The CCB_RESETDEV Structure ..... 5–6
5.3.6 The CCB_TERMIO Structure ..... 5–6

5.4 Configuration CCB Structures ..... 5–7

5.4.1 The CCB_GETDEV Structure ..... 5–7
5.4.2 The CCB_SETDEV Structure ..... 5–7
5.4.3 The CCB_PATHINQ Structure ..... 5–7

## 6 SCSI/CAM Configuration Driver Modules

6.1 Configuration Driver Introduction ..... 6–1

6.2 Configuration Driver XPT Interface ..... 6–1

6.3 Configuration Driver Data Structures ..... 6–1
6.3.1 The Configuration driver control structure ..... 6–2
6.3.1.1 The ccfg_flags Member ..... 6–2
6.3.1.2 The inq_buf Member ..... 6–2
6.3.2 The CAM Equipment Device Table ..... 6–2
6.3.2.1 The edt Member ..... 6–2
6.3.2.2 The edt_scan_count Member ..... 6–3
6.3.2.3 The edt_flags Member ..... 6–3
6.3.3 The SCSI/CAM Peripheral Driver Configuration Structure ..... 6–3
6.3.3.1 The cpd_name Member ..... 6–3
6.3.3.2 The cpd_slave Member ..... 6–3
6.3.3.3 The cpd_attach Member ..... 6–3
6.3.3.4 The cpd_unload Member ..... 6–3
6.4 The cam_config.c File ..... 6–3
6.5 Configuration Driver Entry Point Routines ..... 6–4
6.5.1 The ccfg_slave Routine ..... 6–5
6.5.2 The ccfg_attach Routine ..... 6–5
6.5.3 The ccfg_action Routine ..... 6–5
6.5.4 The ccfg_edtscan Routine ..... 6–5

## 7 CAM XPT I/O Support Routines

7.1 The xpt_action Routine ..... 7–1
7.2 The xpt_ccb_alloc Routine ..... 7–1
7.3 The xpt_ccb_free Routine ..... 7–1
7.4 The xpt_init Routine ..... 7–2

## 8 CAM SIM Modules

8.1 SIM Asynchronous Callback Handling ..... 8–1
8.2 SIM Routines Used by Device Driver Writers ..... 8–2
8.2.1 The sim_action Routine ..... 8–2
8.2.2 The sim_init Routine ..... 8–2

## 9 USCA Error Handling

9.1 CAM Error Handling Macro ..... 9–1
9.2 CAM Error Logging Structures ..... 9–2

9.2.1 The Error Entry Structure ..... 9–2
9.2.1.1 The ent_type Member ..... 9–2
9.2.1.2 The ent_size Member ..... 9–2
9.2.1.3 The ent_total_size Member ..... 9–2
9.2.1.4 The ent_vers Member ..... 9–3
9.2.1.5 The ent_data Member ..... 9–3
9.2.1.6 The ent_pri Member ..... 9–3
9.2.2 The Error Header Structure ..... 9–3
9.2.2.1 The hdr_type Member ..... 9–3
9.2.2.2 The hdr_size Member ..... 9–3
9.2.2.3 The hdr_class Member ..... 9–4
9.2.2.4 The hdr_subsystem Member ..... 9–4
9.2.2.5 The hdr_entries Member ..... 9–4
9.2.2.6 The hdr_list Member ..... 9–4
9.2.2.7 The hdr_pri Member ..... 9–4
9.3 The cam_logger Routine ..... 9–4

## 10 USCA Debugging Facilities

10.1 CAM Debugging Variables ..... 10–1
10.1.1 The camdbg_flag Variable ..... 10–1
10.1.2 The camdbg_id Variable ..... 10–2
10.2 CAM Debugging Macros ..... 10–2
10.3 CAM Debugging Routines ..... 10–3
10.3.1 CAM Debugging Status Routines ..... 10–4
10.3.1.1 The cdbg_CamFunction Routine ..... 10–4
10.3.1.2 The cdbg_CamStatus Routine ..... 10–4
10.3.1.3 The cdbg_ScsiStatus Routine ..... 10–5
10.3.1.4 The cdbg_SystemStatus Routine ..... 10–5
10.3.2 CAM Dump Routines ..... 10–5
10.3.2.1 The cdbg_DumpCCBHeader Routine ..... 10–5
10.3.2.2 The cdbg_DumpCCBHeaderFlags Routine ..... 10–5
10.3.2.3 The cdbg_DumpSCSIIO Routine ..... 10–6
10.3.2.4 The cdbg_DumpPDRVws Routine ..... 10–6
10.3.2.5 The cdbg_DumpABORT Routine ..... 10–6
10.3.2.6 The cdbg_DumpTERMIO Routine ..... 10–6
10.3.2.7 The cdbg_DumpBuffer Routine ..... 10–6
10.3.2.8 The cdbg_GetDeviceName Routine ..... 10–6
10.3.2.9 The cdbg_DumpInquiryData Routine ..... 10–6

## 11 Programmer-Defined SCSI/CAM Device Drivers


11.1 Programmer-Defined SCSI/CAM Data Structures ..... 11–1

11.1.1 Programmer-Defined Peripheral Device Unit Table ..... 11–1

11.1.1.1 The pu_device Member ..... 11–1
11.1.1.2 The pu_opens Member ..... 11–2
11.1.1.3 The pu_config Member ..... 11–2
11.1.1.4 The pu_type Member ..... 11–2

11.1.2 Programmer-Defined Peripheral Device Structure ..... 11–2

11.1.2.1 The pd_active_list Member ..... 11–3
11.1.2.2 The pd_active_ccb Member ..... 11–3
11.1.2.3 The pd_que_depth Member ..... 11–3
11.1.2.4 The pd_pend_list Member ..... 11–3
11.1.2.5 The pd_pend_ccb Member ..... 11–3
11.1.2.6 The pd_dev Member ..... 11–3
11.1.2.7 The pd_bus Member ..... 11–3
11.1.2.8 The pd_target Member ..... 11–3
11.1.2.9 The pd_lun Member ..... 11–3
11.1.2.10 The pd_unit Member ..... 11–3
11.1.2.11 The pd_flags and pd_state Members ..... 11–4
11.1.2.12 The pd_abort_cnt Member ..... 11–4
11.1.2.13 The pd_cam_flags Member ..... 11–4
11.1.2.14 The pd_tag_action Member ..... 11–4
11.1.2.15 The pd_dev_inq Member ..... 11–4
11.1.2.16 The pd_ms_index Member ..... 11–4
11.1.2.17 The pd_dev_desc Member ..... 11–4
11.1.2.18 The pd_specific Member ..... 11–4
11.1.2.19 The pd_spec_size Member ..... 11–4
11.1.2.20 The pd_sense_ptr Member ..... 11–4
11.1.2.21 The pd_sense_len Member ..... 11–4
11.1.2.22 The pd_recov_hand Member ..... 11–4
11.1.2.23 The pd_read_count Member ..... 11–5
11.1.2.24 The pd_write_count Member ..... 11–5
11.1.2.25 The pd_read_bytes Member ..... 11–5
11.1.2.26 The pd_write_bytes Member ..... 11–5
11.1.2.27 The pd_lk_device Member ..... 11–5

11.1.3 Programmer-Defined Device Descriptor Structure ..... 11–5

11.1.3.1 The dd_pv_name Member ..... 11–6
11.1.3.2 The dd_length Member ..... 11–6
11.1.3.3 The dd_dev_name Member ..... 11–6
11.1.3.4 The dd_device_type Member ..... 11–6
11.1.3.5 The dd_def_partition Member ..... 11–6
11.1.3.6 The dd_block_size Member ..... 11–6
11.1.3.7 The dd_max_record Member ..... 11–6
11.1.3.8 The dd_density_tbl Member ..... 11–6
11.1.3.9 The dd_modesel_tbl Member ..... 11–7
11.1.3.10 The dd_flags Member ..... 11–7

11.1.3.11 The dd_scsi_optcmds Member ..... 11–7
11.1.3.12 The dd_ready_time Member ..... 11–7
11.1.3.13 The dd_que_depth Member ..... 11–7
11.1.3.14 The dd_valid Member ..... 11–7
11.1.3.15 The dd_inq_len Member ..... 11–7
11.1.3.16 The dd_req_sense_len Member ..... 11–7

11.1.4 Programmer-Defined Density Table Structure ..... 11–8

11.1.4.1 The den_flags Member ..... 11–8
11.1.4.2 The den_density_code Member ..... 11–8
11.1.4.3 The den_compress_code Member ..... 11–8
11.1.4.4 The den_speed_setting Member ..... 11–8
11.1.4.5 The den_buffered_setting Member ..... 11–8
11.1.4.6 The den_blocking Member ..... 11–8
11.1.4.7 Sample Density Table Structure Entry ..... 11–9

11.1.5 Programmer-Defined Mode Select Table Structure ..... 11–9

11.1.5.1 The ms_page Member ..... 11–10
11.1.5.2 The ms_data Member ..... 11–10
11.1.5.3 The ms_data_len Member ..... 11–10
11.1.5.4 The ms_ent_sp_pf Member ..... 11–11
11.1.5.5 Sample Mode Select Table Structure Entry ..... 11–11

11.2 Sample SCSI/CAM Device-Specific Data Structures ..... 11–11

11.2.1 Programmer-Defined Tape-Specific Structure ..... 11–11

11.2.1.1 The ts_flags Member ..... 11–12
11.2.1.2 The ts_state_flags Member ..... 11–12
11.2.1.3 The ts_resid Member ..... 11–13
11.2.1.4 The ts_block_size Member ..... 11–13
11.2.1.5 The ts_density Member ..... 11–13
11.2.1.6 The ts_records Member ..... 11–13
11.2.1.7 The ts_num_filemarks Member ..... 11–13
11.2.1.8 The ts_softcnt Member ..... 11–13
11.2.1.9 The ts_hardcnt Member ..... 11–13

11.2.2 Programmer-Defined Disk- and CDROM-Specific Structure ..... 11–14

11.2.2.1 The ds_bufhd Member ..... 11–14
11.2.2.2 The ds_dkn Member ..... 11–14
11.2.2.3 The ds_bbr_state Member ..... 11–14
11.2.2.4 The ds_bbr_retry Member ..... 11–14
11.2.2.5 The ds_bbr_rwccb Member ..... 11–14
11.2.2.6 The ds_bbr_reasccb Member ..... 11–15
11.2.2.7 The ds_tur_ccb Member ..... 11–15
11.2.2.8 The ds_start_ccb Member ..... 11–15
11.2.2.9 The ds_mdsel_ccb Member ..... 11–15
11.2.2.10 The ds_rdcp_ccb Member ..... 11–15
11.2.2.11 The ds_read_ccb Member ..... 11–15
11.2.2.12 The ds_prev_ccb Member ..... 11–15
11.2.2.13 The ds_block_size Member ..... 11–15

11.2.2.14 The ds_tot_size Member ..... 11–15
11.2.2.15 The ds_media_changes Member ..... 11–15
11.2.2.16 The ds_pt Sructure ..... 11–15
11.2.2.17 The ds_openpart Member ..... 11–15
11.2.3 SCSI/CAM CDROM/AUDIO I/O Control Commands ..... 11–15
11.2.3.1 Structures Used by SCSI/CAM CDROM/AUDIO I/O Control Commands ..... 11–16
11.2.3.1.1 Structure Used by All SCSI/CAM CDROM/AUDIO I/O Control Commands ..... 11–17
11.2.3.1.2 Structure Used by the CDROM_PLAY_AUDIO and CDROM_PLAY_VAUDIO Commands ..... 11–18
11.2.3.1.3 Structure Used by the CDROM_PLAY_AUDIO_MSF and CDROM_PLAY_MSF Commands ..... 11–18
11.2.3.1.4 Structure Used by the CDROM_PLAY_AUDIO_TI Command ..... 11–19
11.2.3.1.5 Structure Used by the CDROM_PLAY_AUDIO_TR Command ..... 11–20
11.2.3.1.6 Structure Used by the CDROM_TOC_HEADER Command ..... 11–20
11.2.3.1.7 Structures Used by the CDROM_TOC_ENTRYS Command ..... 11–21
11.2.3.1.8 Structures Used by the CDROM_READ_SUBCHANNEL Command ..... 11–22
11.2.3.1.9 Structures Used by the CDROM_READ_HEADER Command ..... 11–26
11.2.3.1.10 Structure Used by the CDROM_PLAY_TRACK Command ..... 11–27
11.2.3.1.11 Structure Used by the CDROM_PLAYBACK_CONTROL and CDROM_PLAYBACK_STATUS Commands ..... 11–27
11.2.3.1.12 Structure Used by the CDROM_PLAYBACK_CONTROL Command ..... 11–28
11.2.3.1.13 Structure Used by the CDROM_PLAYBACK_STATUS Command ..... 11–28
11.3 Adding a Programmer-Defined SCSI/CAM Device ..... 11–30

## 12 SCSI/CAM Special I/O Interface

12.1 Application Program Access ..... 12–1
12.2 Device Driver Access ..... 12–2
12.3 SCSI/CAM Special Command Tables ..... 12–3
12.3.1 The sph_flink and sph_blink Members ..... 12–4
12.3.2 The sph_cmd_table Member ..... 12–4
12.3.3 The sph_device_type Member ..... 12–4

12.3.4 The sph_table_flags Member ..... 12–4
12.3.5 The sph_table_name Member ..... 12–4

12.4 SCSI/CAM Special Command Table Entries ..... 12–5

12.4.1 The spc_ioctl_cmd and spc_sub_command Members ..... 12–5
12.4.2 The spc_cmd_flags Member ..... 12–5
12.4.3 The spc_command_code Member ..... 12–6
12.4.4 The spc_device_type Member ..... 12–6
12.4.5 The spc_cmd_parameter Member ..... 12–6
12.4.6 The spc_cam_flags Member ..... 12–6
12.4.7 The spc_file_flags Member ..... 12–6
12.4.8 The spc_data_length Member ..... 12–6
12.4.9 The spc_timeout Member ..... 12–6
12.4.10 The spc_docmd Member ..... 12–6
12.4.11 The spc_mkcdb Member ..... 12–7
12.4.12 The spc_setup Member ..... 12–7
12.4.13 The spc_cdbp Member ..... 12–7
12.4.14 The spc_cmdp Member ..... 12–7
12.4.15 Sample SCSI/CAM Special Command Table ..... 12–7

12.5 SCSI/CAM Special I/O Argument Structure ..... 12–8

12.5.1 The sa_flags Member ..... 12–10
12.5.2 The sa_dev Member ..... 12–10
12.5.3 The sa_unit, sa_bus, sa_target, and sa_lun Members ..... 12–11
12.5.4 The sa_ioctl_cmd Member ..... 12–11
12.5.5 The sa_ioctl_scmd Member ..... 12–11
12.5.6 The sa_ioctl_data Member ..... 12–11
12.5.7 The sa_device_name Member ..... 12–11
12.5.8 The sa_device_type Member ..... 12–11
12.5.9 The sa_iop_length and sa_iop_buffer Members ..... 12–11
12.5.10 The sa_file_flags Member ..... 12–11
12.5.11 The sa_sense_length and sa_sense_buffer Members ..... 12–12
12.5.12 The sa_user_length and sa_user_buffer Members ..... 12–12
12.5.13 The sa_bp Member ..... 12–12
12.5.14 The sa_ccb Member ..... 12–12
12.5.15 The special_cmd Member ..... 12–12
12.5.16 The special_header Member ..... 12–12
12.5.17 The sa_cmd_parameter Member ..... 12–12
12.5.18 The sa_error Member ..... 12–13
12.5.19 The sa_start Member ..... 12–13
12.5.20 The sa_data_length and sa_data_buffer Members ..... 12–13
12.5.21 The sa_cdb_pointer Member ..... 12–13
12.5.22 The sa_cdb_length Member ..... 12–13
12.5.23 The sa_cmd_flags Member ..... 12–13
12.5.24 The sa_retry_count Member ..... 12–14
12.5.25 The sa_retry_limit Member ..... 12–14
12.5.26 The sa_timeout Member ..... 12–14
12.5.27 The sa_xfer_resid Member ..... 12–14

12.5.28 The sa_specific Member ..... 12–14
12.5.29 Sample Function to Create a CDB ..... 12–14
12.5.30 Sample Function to Set Up Parameters ..... 12–15

12.6 SCSI/CAM Special I/O Control Command ..... 12–16

12.6.1 The sp_flags Member ..... 12–17
12.6.2 The sp_dev, sp_unit, sp_bus, sp_target, and sp_lun Members ..... 12–18
12.6.3 The sp_sub_command Member ..... 12–18
12.6.4 The sp_cmd_parameter Member ..... 12–18
12.6.5 The sp_iop_length and sp_iop_buffer Members ..... 12–18
12.6.6 The sp_sense_length, sp_sense_resid, and sp_sense_buffer Members .. 12–18
12.6.7 The sp_user_length and sp_user_buffer Members ..... 12–18
12.6.8 The sp_timeout Member ..... 12–19
12.6.9 The sp_retry_count Member ..... 12–19
12.6.10 The sp_retry_limit Member ..... 12–19
12.6.11 The sp_xfer_resid Member ..... 12–19
12.6.12 Sample Function to Create an I/O Control Command ..... 12–19

12.7 Other Sample Code ..... 12–20

12.7.1 Sample Code to Open a Device ..... 12–20
12.7.2 Sample Code to Create a Driver Entry Point ..... 12–22

## A Header Files Used by Device Drivers

## B Summary of Device Driver Routines

## C SCSI/CAM Routines in ULTRIX Reference Page Format

## Index

## Figures

1-1: CAM Environment Model ..... 1–2
1-2: ULTRIX SCSI/CAM Architecture Implementation Model ..... 1–3
12-1: Application Program Flow Through SCSI/CAM Special I/O Interface ..... 12–2
12-2: Device Driver Flow Through SCSI/CAM Special I/O Interface ..... 12–3

## Tables

2-1: User Agent Routines ..... 2–4
3-1: Members of the PDRV_DEVICE Structure ..... 3–2
3-2: Common Identification Macros ..... 3–5

3-3: Common Lock Macros ..... 3–6
3-4: Common I/O Routines ..... 3–8
3-5: Common Queue Manipulation Routines ..... 3–9
3-6: Common CCB Management Routines ..... 3–10
3-7: Common SCSI I/O Command Building Routines ..... 3–12
3-8: Miscellaneous Common Routines ..... 3–15
4-1: Generic I/O Routines ..... 4–4
4-2: Generic Internal Routines ..... 4–6
4-3: Generic Command Support Routines ..... 4–8
5-1: CAM Control Blocks ..... 5–1
5-2: CAM Function Codes ..... 5–2
5-3: CAM Status Codes ..... 5–3
6-1: Configuration Driver Entry Point Routines ..... 6–4
7-1: XPT I/O Support Routines ..... 7–1
10-1: CAM Debugging Status Routines ..... 10–4
10-2: CAM Dump Routines ..... 10–5
11-1: SCSI/CAM CDROM/AUDIO I/O Control Commands ..... 11–16
11-2: Structures Used by SCSI/CAM CDROM/AUDIO I/O Control Commands ..... 11–16
12-1: SCSI/CAM Special I/O Argument Structure ..... 12–8
A-1: Header Files Used by Device Drivers ..... A–1
A-2: Header Files Used by SCSI/CAM Drivers ..... A–3
B-1: Summary of Device Driver Routines ..... B–1

# About This Manual

This manual contains information needed by systems engineers who write device drivers for the ULTRIX SCSI/CAM Architecture interfaces.

## Audience

This manual is intended for systems engineers who:

- Develop programs in the C language using standard library routines
- Know one or more UNIX shells, other than `csh`
- Understand basic ULTRIX components such as the kernel, shells, processes, configuration, autoconfiguration, and so forth
- Understand how to use the ULTRIX programming tools, compilers, and debuggers
- Develop programs in an environment that includes dynamic memory allocation, linked list data structures, multitasking and symmetric multiprocessing (SMP)
- Understand the hardware device for which the driver is being written

## Organization

This manual is organized as follows:

| | |
|---|---|
| Chapter 1 | ULTRIX SCSI/CAM Software Architecture<br>Presents an overview of the ULTRIX SCSI CAM Architecture (USCA). |
| Chapter 2 | CAM User Agent Modules<br>Describes the User Agent routines provided by Digital for SCSI/CAM peripheral device driver writers |
| Chapter 3 | USCA Common Modules<br>Describes the common data structures, routines, and macros provided by Digital for SCSI/CAM peripheral device driver writers |
| Chapter 4 | USCA Generic Modules<br>Describes the generic routines provided by Digital for SCSI/CAM peripheral device driver writers |
| Chapter 5 | CAM Data Structures<br>Describes members of the CAM data structures used by SCSI device drivers. |
| Chapter 6 | SCSI/CAM Configuration Driver Modules<br>Describes the CAM Configuration driver data structures and routines that call the initialization routines in all the CAM subsystem modules. |
| Chapter 7 | CAM XPT I/O Support Routines |

| | |
|---|---|
| | Discusses the Transport (XPT) layer routines used with SCSI device drivers. |
| Chapter 8 | CAM SIM Modules<br>Discusses the data structures and routines used with the SCSI Interface Module (SIM) layers that interface with the CAM subsystem. |
| Chapter 9 | USCA Error Handling<br>Discusses the macro, data structures, and routines supplied by Digital for error handling in SCSI/CAM device drivers. |
| Chapter 10 | USCA Debugging Facilities<br>Describes the debugging routines supplied by Digital for SCSI/CAM peripheral device driver writers. |
| Chapter 11 | Programmer-Defined SCSI/CAM Device Drivers<br>Describes how programmers can define SCSI/CAM device drivers, with examples. |
| Chapter 12 | SCSI/CAM Special I/O Interface<br>Describes the SCSI/CAM special I/O interface supplied by Digital to process special SCSI I/O commands, with examples. |
| Appendix A | Header Files Used by SCSI/CAM Device Drivers<br>Summarizes the header files used by SCSI/CAM device drivers. |
| Appendix B | Summary of Device Driver Routines<br>Summarizes the general device driver routines used by SCSI/CAM device drivers. |
| Appendix C | SCSI/CAM Routines in ULTRIX Reference Page Format<br>Provides more detailed descriptions of the USCA routines in ULTRIX reference page format. |

## Related Documentation

Readers of this guide are assumed to be familiar with the following documents:

- American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186 Terms used in this guide, such as CAM Control Block (CCB), are defined in that document. Copies may be purchased from Global Engineering, 2805 McGaw St, Irvine, CA 92714, telephone 800-854-7179.
- American National Standard for Information Systems, *Small Computer Systems Interface - 2* (SCSI - 2), X3T9/89-042

The following documents contain information that pertains to writing device drivers:

- *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers*
  This guide contains information needed by systems engineers who write and port device drivers for the VMEbus and the TURBOchannel. Systems engineers who write drivers that operate on other buses can find information on driver concepts, interfaces to device driver routines, kernel structures, kernel routines used by device drivers, installation of device drivers, and header files related to device drivers.
- *Guide to Configuration File Maintenance*
  This guide contains information on how to maintain the system configuration file and how to build a new kernel, either automatically or manually. The configuration file provides you with the ability to configure your system to meet

your needs. You should read this manual if you are responsible for maintaining an ULTRIX system. You should also read parts of this manual if you are planning to modify or write device drivers.

- *Guide to the Error Logger*
  This guide contains information about the error logger and how it records and reports errors and other events that occur on your ULTRIX system. The guide gives an overview of the error logger, describes how to control error logger functions, and describes using the Error Report Formatter, `uerf`. You should read this manual if you manage error information on an ULTRIX system.

## Conventions

| | |
|---|---|
| `%` | The default user prompt is your system name followed by a right angle bracket. In this manual, a percent sign (`%`) is used to represent this prompt. |
| `% cat` | A regular constant-width typeface is used for code examples, system prompts in interactive examples, and names of commands and other literal strings in text. A bold constant-width typeface is used for typed user input in interactive examples and for routines in function definitions. |
| *`filename`* | In examples, syntax descriptions, and function definitions, this typeface indicates variable values. |
| **cat** *file* | In syntax definitions, a bold sans serif typeface is used for literal strings and a sloping sans serif typeface is used for variable values. |
| `cat`(1) | A cross-reference to a reference page include the appropriate section number in parentheses. For example, a reference to `cat`(1) indicates that you can find the material on the `cat` command in Section 1 of the reference pages. |

# ULTRIX SCSI/CAM Software Architecture 1

This chapter provides an overview of the ULTRIX Small Computer System Interface (SCSI) Common Access Method (CAM) Architecture (USCA). which is a reliable, maintainable, and high performance SCSI subsystem based on the industry-standard CAM architecture. Readers of this guide should be familiar with the following documents:

- American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186

Terms used in this guide, such as CAM Control Block (CCB), are defined in that document. Copies may be purchased from Global Engineering, 2805 McGaw St, Irvine, CA 92714, telephone 800-854-7179.

- American National Standard for Information Systems, *Small Computer Systems Interface - 2* (SCSI - 2), X3T9/89-042

This chapter describes the following:

- The CAM and USCA environment models
- The User Agent driver
- The SCSI/CAM peripheral device driver routines
  - The CAM common routines supplied by Digital
  - The generic routines supplied by Digital
  - The SCSI disk device routines
  - The SCSI tape device routines
  - The SCSI CDROM/AUDIO device commands
  - The SCSI/CAM Special I/O interface
- The CAM Configuration driver
- The CAM Transport layer
- The SCSI Interface Module (SIM)

## 1.1 Overview

The CAM architecture defines a software model that is layered, providing hardware independence for SCSI device drivers and SCSI system software. In the CAM model, which is illustrated in Figure 1-1, a single SCSI/CAM peripheral driver controls SCSI devices of the same type, for example, direct access devices. This driver communicates with a device on the bus through a defined interface. Using this interface makes a SCSI/CAM peripheral device driver independent of the underlying SCSI Host Bus Adapter (HBA).

This hardware independence is achieved by using the Transport (XPT) and SCSI Interface Module (SIM) components of CAM. Because the XPT/SIM interface is defined and standardized, users and third parties can write SCSI/CAM peripheral device drivers for a variety of devices and use existing operating system support for SCSI. The drivers do not contain SCSI HBA dependencies; therefore, they can run on any hardware platform that has an XPT/SIM interface present.

**Figure 1-1: CAM Environment Model**

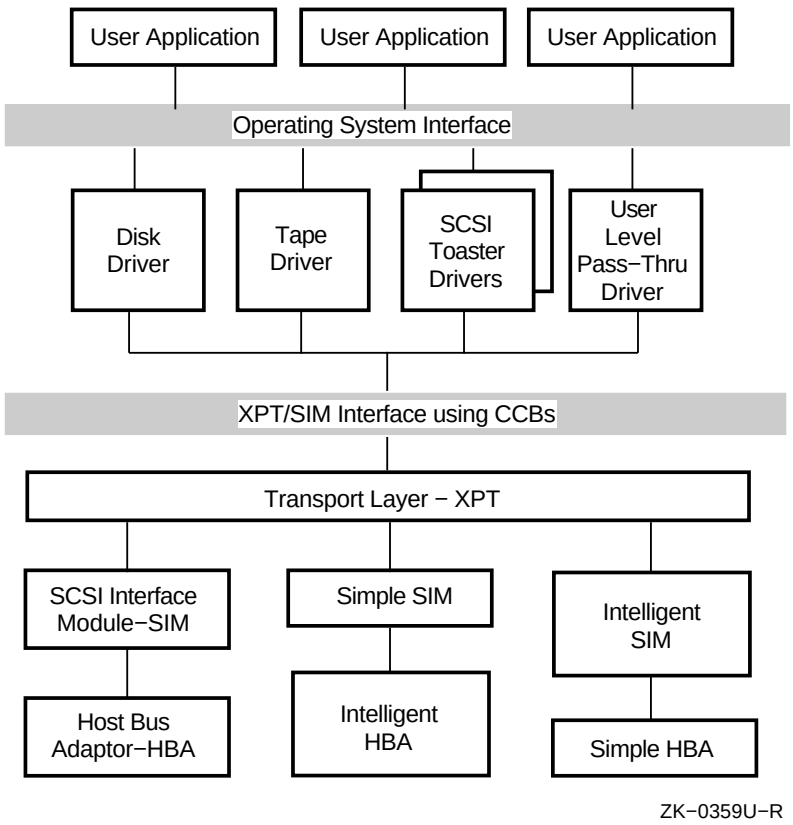


Figure 1-2 illustrates the ULTRIX SCSI/CAM implementation of that model.

**Figure 1-2: ULTRIX SCSI/CAM Architecture Implementation Model**

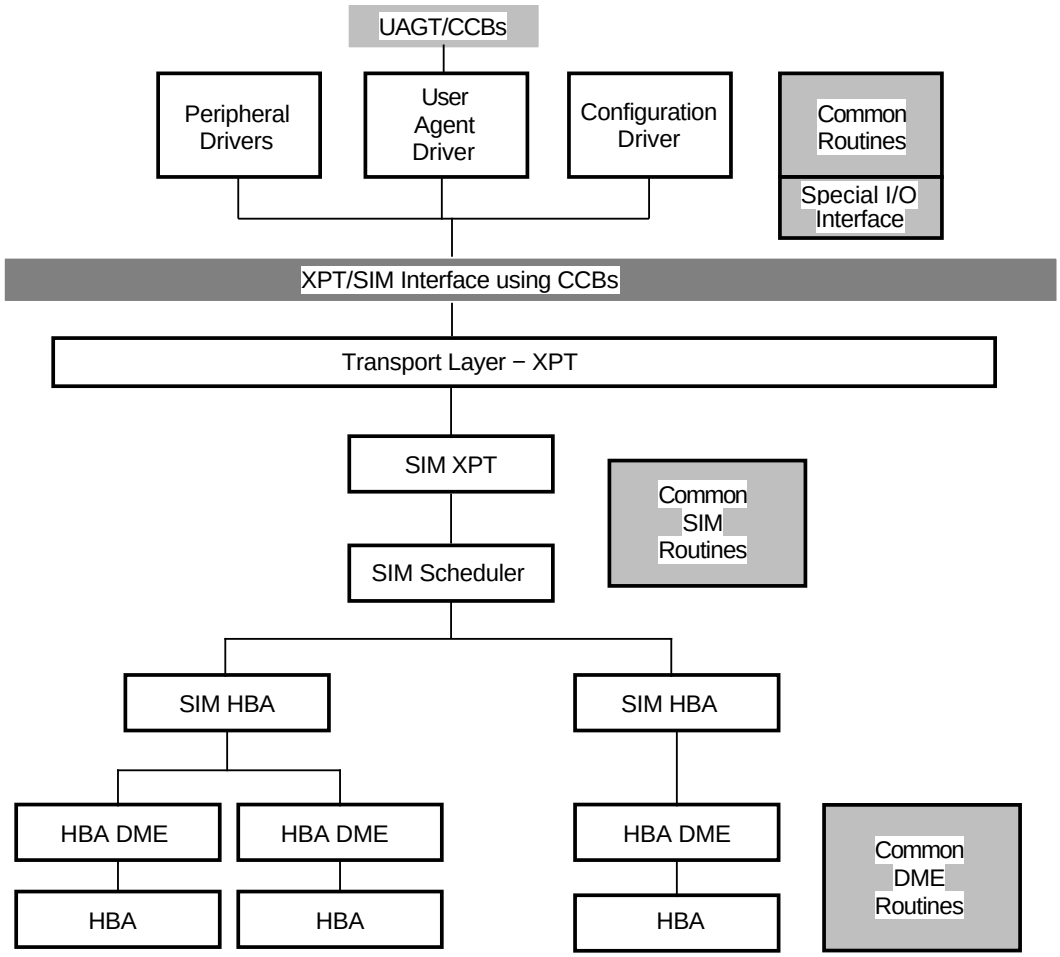


## 1.2 CAM User Agent Device Driver

The User Agent driver lets user process CAM Control Block (CCB) requests to the XPT pass through for processing. The CCB contains all information required to fulfill the request. The user process calls the User Agent indirectly, using the `ioctl`(2) system call. A new User Agent CCB is allocated by a call to the XPT layer, and the user-process CCB information is copied into kernel space. The new CCB is filled in with the CCB values from the user process. If necessary, the user data areas are locked in memory. The CCB is then sent to the CAM subsystem for processing.

Once the request has completed, the User Agent driver's completion routine is called. That routine performs all necessary cleanup operations and notifies the user process that the request is complete.

The User Agent allows multiple processes to issue CCBs, so there may be multiple processes sleeping on the User Agent. All CCBs are queued at the SIM layer.

## 1.3 SCSI/CAM Peripheral Device Drivers

SCSI/CAM peripheral device drivers convert operating system requests, such as user process reads or writes, into CAM requests that the SCSI/CAM subsystem can process. Each type of SCSI/CAM peripheral driver is responsible for a specific class of SCSI device, such as SCSI tape devices. The SCSI/CAM peripheral driver handles error codes and conditions for its SCSI device class.

SCSI/CAM peripheral drivers convert input/output (I/O) requests into CAM Control Blocks (CCBs) that contain SCSI Command Descriptor Blocks (CDBs). CCBs are presented to the underlying transport layer, XPT, to initiate I/O requests. SCSI/CAM peripheral drivers implement SCSI device error recovery, for example, dynamic bad block replacement (DBBR). The SCSI device driver has no access to SCSI device control and status registers (CSRs) and receives no SCSI device interrupts.

The major/minor device-number pair, which is 16 bits wide, is used as an argument when creating the device special file associated with a specific SCSI device and is contained in the `buf` structure when accessing the device in raw or blocked mode. The 16 bits are allocated as follows:

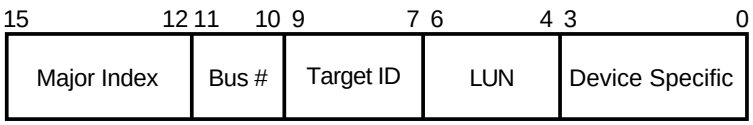


ZK−0403U−R

The major number range goes from HEX 60 to HEX 6f and the minor number range goes from HEX 00 to HEX f0. For example, a device that starts with a major number of 0x60 and a minor number of 0x00 represents Bus 0, Target 0, and Logical Unit 0. The last SCSI device that this sample device driver would control has major number 0x6f and minor number 0xf0. This represents Bus 4, Target 7, and Logical Unit 7.

This section provides overviews of the following:

- Common SCSI device driver modules
- Generic SCSI device driver modules
- SCSI disk device driver modules
- SCSI tape device driver modules
- SCSI CDROM/AUDIO device driver modules

Chapters 3, 4, and 11 describe the data structures and the routines associated with each module.

### 1.3.1 USCA Common Device Driver Modules

The common SCSI device driver structures and routines can be shared among all the SCSI/CAM peripheral drivers written by device driver writers for ULTRIX. Using these common routines can speed the process of writing a SCSI device driver by providing routines that any SCSI device driver can use to perform operations.

### 1.3.2 USCA Generic Device Driver Modules

Digital supplies predefined data structures and formats that SCSI device driver writers can use to write generic SCSI/CAM peripheral device drivers. These data structures and formats can be used in conjunction with the common routines. Chapter 4 includes a sample generic SCSI device driver using the common routines.

### 1.3.3 CAM SCSI Disk Device Driver Modules

The SCSI/CAM peripheral disk driver supports removable (floppy) and nonremovable direct access SCSI disk devices and CDROM devices. The user interface consists of the major/minor device number pair and the `ioctl` commands supported by the SCSI disk device driver. The SCSI disk device driver also uses the common routines.

### 1.3.4 CAM SCSI Tape Device Driver Modules

The SCSI tape device structures and routines are exclusive to the SCSI/CAM peripheral tape driver. The user interface consists of the major/minor device number pair and the `ioctl` commands supported by the SCSI tape device driver. The SCSI tape device driver also uses the common routines.

### 1.3.5 CAM SCSI CDROM/AUDIO Device Driver Modules

The SCSI CDROM/AUDIO device commands, which are described in Chapter 11, use the SCSI CDROM/AUDIO device structures. The SCSI CDROM/AUDIO device driver also uses the common routines.

## 1.4 SCSI/CAM Special I/O Interface

The USCA software includes an interface developed to process special SCSI I/O control commands used by the existing Digital SCSI subsystem and to aid in porting new or existing SCSI device drivers from other vendors to the USCA. With the SCSI/CAM special I/O interface, SCSI/CAM peripheral driver writers do not need detailed knowledge of either the system-specific or the CAM-specific structures and routines used to issue a SCSI command to the CAM I/O subsystem.

## 1.5 The SCSI/CAM Configuration Driver

The Configuration driver is responsible for configuring and initializing the CAM subsystem. This driver is also responsible for maintaining the `cam_edt[]` information structure.

When the system powers up, the Configuration driver initializes the local and global CAM subsystem data structures. The Configuration driver also calls the XPT and SIM initialization routines. Once the subsystems are initialized, the Configuration driver performs a SCSI-bus scan by sending the SCSI Device Inquiry command. The `cam_edt[]` structure contains the returned SCSI inquiry data for the SCSI/CAM peripheral drivers to access. The drivers, using the XPT_GDEV_TYPE and XPT_SDEV_TYPE get and set device information CCBs, can access the data contained in `cam_edt[]`.

## 1.6 CAM Transport Layer (XPT)

The CAM transport layer, XPT, handles the CAM requests from the SCSI/CAM peripheral drivers and routes them to the appropriate SIM module. The XPT provides routines which are called by the SCSI/CAM peripheral driver to allocate and deallocate CAM control blocks (CCBs). In addition, the XPT provides routines that are used to initiate requests to the SIM and to issue asychronous callbacks.

## 1.7 SCSI Interface Module Layers (SIM)

The SCSI Interface Module, SIM, has the most interaction with the SCSI bus protocol, timings, and other hardware-specific operations. Although this is a single component in the CAM model, it is divided into four logical sublayers in ULTRIX:

- SIM XPT – The SIM layer that interfaces to the XPT to initiate I/O on behalf of the SCSI/CAM peripheral drivers.
- SIM SCHEDULER – The SIM layer that schedules requests to the SIM HBAs.
- SIM HBA – The SIM layer that contains the HBA device-specific information.
- SIM DME – A low level layer that contains the architecture-specific data-movement code.

# CAM User Agent Modules 2

This chapter describes the functions of the ULTRIX User Agent SCSI device driver. It also describes the User Agent data structures and routines used by the User Agent SCSI device driver.

## 2.1 User Agent Introduction

The ULTRIX User Agent SCSI device driver lets device driver writers write an application program to build a CAM Control Block (CCB) request. The User Agent driver lets the user-process request pass through to the XPT layer for processing. This gives user processes access to the SCSI/CAM subsystem and to all types of SCSI/CAM peripheral devices attached to the system.

This is a simple method for passing the CCB's SCSI request to the devices using the SIMs. The kernel does not have to be rebuilt if the device driver writer wants to change values within the CCBs.

The CCB contains all the information required to perform the request. The user process calls the User Agent SCSI device driver using the `ioctl` system call. See `ioctl`(2) for more information. The User Agent ioctl routine, `uagt_ioctl`, is called through the device switch table, which is indexed by the major device number of the User Agent driver specified in the `ioctl` call. The `ioctl` commands supported by the User Agent SCSI device driver are: DEVIOCGET, which returns the SCSI device driver status; UAGT_CAM_IO, which sends the specified CCB to the XPT layer for processing; UAGT_CAM_SINGLE_SCAN, which causes the scan of a bus, target, and LUN; and UAGT_CAM_FULL_SCAN, which causes the scan of a bus.

A CCB is allocated in the kernel and the user process's CCB is copied to the kernel CCB. The User Agent SCSI device driver sleeps waiting for the request to complete; then, all necessary cleanup is performed, and the user process is notified of the completion of the request. If a signal is caught, an ABORT CCB is issued to try to terminate the outstanding CCB for the user process.

The User Agent SCSI device driver allows multiple processes access to the XPT layer; therefore, there may be multiple processes sleeping on the User Agent. All CCBs passed through by the User Agent are queued at the SIM layer.

## 2.2 User Agent Error Handling

The User Agent SCSI device driver performs limited error checking on the CCB pointed to in the UAGT_CAM_CCB structure passed from the user process. The User Agent driver verifies that the `uagt_ccblen` is not greater than the maximum length for a CCB, checks that the XPT function code is valid, and checks that the Target ID and LUN specified are within the range allowed. The User Agent does not issue a REQUEST SENSE command in response to a CHECK CONDITION status. Autosensing is assumed to be enabled. The application program is responsible for

issuing a RELEASE SIM QUEUE CCB.

The following error codes are returned by the User Agent:

- EFAULT – An error occurred in copying to or from user space.
- EBUSY – Out of resources (the User Agent request table is full).
- EINVAL – An invalid target or LUN was passed to the User Agent driver, or the CCB copied from the user process contained an invalid parameter.

## 2.3 User Agent Data Structures

This section describes the data structures the User Agent uses.

### 2.3.1 The UAGT_CAM_CCB Data Structure

The User Agent SCSI device driver uses the UAGT_CAM_CCB data structure to communicate with the user processes requesting access to the SCSI/CAM subsystem.

The user process fills in the pointers in the UAGT_CAM_CCB data structure. The structure is copied into kernel space. The user process's CCB is copied into kernel space by the User Agent.

If necessary, the user data area and the sense data area are locked in memory. If the pointers are not needed with the requested CCB, the pointers must be set to NULL.

The CCB contains all the information necessary to execute the requested XPT function. The addresses in the CCB are used by the SIM and must be valid. The User Agent will not modify the corresponding pointers in the CCB.

The CCB definition is different for each of the following XPT functions supported by the User Agent SCSI device driver:

- XPT_NOOP – Execute nothing.
- XPT_SCSI_IO – Execute the requested SCSI IO.
- XPT_GDEV_TYPE – Get the device type information.
- XPT_PATH_INQ – Path inquiry.
- XPT_REL_SIMQ – Release the SIM queue that was frozen by a previous CHECK CONDITION status.
- XPT_SASYNC_CB – Set async callback parameters.
- XPT_SDEV_TYPE – Set the device type information.
- XPT_ABORT – Abort the selected CCB.
- XPT_RESET_BUS – Reset the SCSI bus.
- XPT_RESET_DEV – Reset the SCSI device, BDR.
- XPT_TERM_IO – Terminate the selected CCB.

If a signal is generated by the user process, the User Agent creates an XPT_ABORT CCB to abort the outstanding I/O and then waits for the completion of the I/O and notifies the user process when the aborted CCB is returned to the User Agent.

The UAGT_CAM_CCB structure is defined as follows:

```
typedef struct uagt_cam_ccb
{
    CCB_HEADER *uagt_ccb;      /* pointer to the users CCB */
    u_long uagt_ccblen;        /* length of the users CCB */
    u_char *uagt_buffer;       /* pointer for the data buffer */
    u_long uagt_buflen;        /* length of user request */
    u_char *uagt_snsbuf;       /* pointer for the sense buffer */
    u_long uagt_snslen;        /* length of user's sense buffer */
    CDB_UN *uagt_cdb;          /* ptr for a CDB if not in CCB */
    u_long uagt_cdblen;        /* CDB length if appropriate */
    u_long uagt_flags;         /* See below */
} UAGT_CAM_CCB;
```

#### 2.3.1.1 The uagt_ccb Member

The `uagt_ccb` member contains a pointer to the user process's CCB that will be copied into kernel space.

#### 2.3.1.2 The uagt_ccblen Member

The `uagt_ccblen` member contains the length of the user process's CCB.

#### 2.3.1.3 The uagt_buffer Member

The `uagt_buffer` member contains a pointer to the user process's data buffer. This member is used only by the User Agent.

#### 2.3.1.4 The uagt_buflen Member

The `uagt_buflen` member contains the length of the user process's data buffer. This member is used only by the User Agent.

#### 2.3.1.5 The uagt_snsbuf Member

The `uagt_snsbuf` member contains a pointer to the user process's autosense data buffer. This member is used only by the User Agent.

#### 2.3.1.6 The uagt_snslen Member

The `uagt_snslen` member contains the length of the user process's autosense data buffer. This member is used only by the User Agent.

#### 2.3.1.7 The uagt_cdb Member

If the user process's CCB contains a pointer to a CDB, then the `uagt_cdb` also contains a pointer to a Command Descriptor Block (CDB) that is to be locked in memory. This member and the `uagt_cdblen` member are used only by the User Agent driver. The CCB must also contain valid pointers and counts.

#### 2.3.1.8 The uagt_cdblen Member

The `uagt_cdblen` contains the length of the Command Descriptor Block, if appropriate.

#### 2.3.1.9 The uagt_flags Member

The `uagt_flags` contains the UAGT_NO_INT_SLEEP bit, which, if set, indicates that the User Agent should not sleep at an interruptible priority.

### 2.3.2 The UAGT_CAM_SCAN Data Structure

The User Agent SCSI device driver uses the UAGT_CAM_SCAN data structure to communicate with user level programs that need to have access to the CAM subsystem. The structure is copied into kernel space as part of the `ioctl` system call from user space for the UAGT_CAM_SINGLE_SCAN and UAGT_CAM_FULL_SCAN commands. The user program fills in the pointers in this structure and the User Agent SCSI device driver correctly fills in the corresponding pointers in the CCB.

The UAGT_CAM_SCAN structure is defined as follows:

```
typedef struct uagt_cam_scan  {
        u_char  ucs_bus;                /* Bus id for scan */
        u_char  ucs_target;             /* Target id for scan */
        u_char  ucs_lun;                /* LUN for scan */
} UAGT_CAM_SCAN;
```

## 2.4 User Agent Routines

This section describes the User Agent routines supplied by Digital. Table 2-1 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each User Agent routine. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 2-1: User Agent Routines**

| Routine | Summary Description |
|---|---|
| `uagt_open` | handles the open of the User Agent driver |
| `uagt_close` | handles the close of the User Agent driver |
| `uagt_ioctl` | handles the `ioctl` system call for the User Agent driver |

### 2.4.1 The uagt_open Routine

The `uagt_open` routine handles the open of the User Agent driver.

The character device special file name used for the open is `/dev/cam`.

### 2.4.2 The uagt_close Routine

The `uagt_close` routine handles the close of the User Agent driver. For the last close operation for the driver, if any queues are frozen, a RELEASE SIM QUEUE CCB is sent to the XPT layer for each frozen queue detected by the User Agent.

### 2.4.3 The uagt_ioctl Routine

The `uagt_ioctl` routine handles the `ioctl` system call for the User Agent driver. The `ioctl` commands supported are: DEVIOCGET, to obtain the User Agent driver's SCSI device status; UAGT_CAM_IO, the `ioctl` define for calls to the User Agent driver; UAGT_CAM_SINGLE_SCAN, to scan a bus, target, and LUN; and UAGT_CAM_FULL_SCAN, to scan a bus.

For SCSI I/O CCB requests, the user data area is locked before passing the CCB to the XPT. The User Agent sleeps waiting for the I/O to complete and issues a ABORT CCB if a signal is caught while sleeping.

## 2.5 Sample User Agent Drivers

Two sample User Agent driver programs follow. The first sample program uses the User Agent driver to perform a SCSI INQUIRY command to a device on a selected nexus.

The second sample program is a scanner control program that sets up a scanner, reads scan line data from the device, and writes the data to a file, using the User Agent driver.

Both programs are included with the USCA software and reside in the `/usr/examples` directory.

### 2.5.1 Sample User Agent Driver Inquiry Program

This section contains the User Agent sample inquiry application program, `caminq.c`, with annotations to the code. The user enters the string `inq` followed by the numbers identifying the bus, target, and LUN nexus to be checked for a valid device. If the device is valid, the INQUIRY data is displayed at the console. If the device is invalid, an error message appears.

#### 2.5.1.1 The Include Files and Definitions Section

This section describes the portion of the User Agent sample inquiry application program that lists the `include` files, local definitions, and data initialization for the program.

```
/* ------------------------------------------------------------- */
/* Include files needed for this program. */

#include <stdio.h>
#include <sys/file.h>
#include <sys/types.h>
#include <sys/ioctl.h>
#include <strings.h>
#include <ctype.h>
#include <sys/cam.h>         /* CAM defines from the CAM document */
#include <sys/dec_cam.h>     /* CAM defines for Digital CAM source files */
#include <sys/uagt.h>        /* CAM defines for the UAgt driver */
#include <sys/scsi_all.h>    /* CAM defines for ALL SCSI devices */
```

```
/* ------------------------------------------------------------ */
/* Local defines */

#define INQUIRY_LEN    36    /* general inquiry length */ 1

/* ------------------------------------------------------------ */
/* Initialized and uninitialized data. */

u_char buf[ INQUIRY_LEN ]; 2
```

1 This line defines a constant of 36 bytes for the length of the inquiry expected by the user from the SCSI device.

2 This line declares a global character array, `buf`, with a size of 36 bytes as defined by the INQUIRY_LEN constant.

#### 2.5.1.2 The Main Program Section

This section describes the `main` program portion of the User Agent sample inquiry application program.

```
/* ------------------------------------------------------------ */
/* The main code path.  The CCB/CDB and UAGT_CAM_CCB are set up for
   an INQUIRY command to the Bus/Target/Lun selected by the command
   line arguments.  The returned INQUIRY data is displayed to the
   user if the status is valid.  If the returned status indicates
   an error, the error is reported instead of the INQUIRY data. */

main(argc, argv)
int argc;
char *argv[];
{

    extern void print_inq_data(); 1
    extern void print_ccb_status();

    u_char id, targid, lun;     /* from the command line */
    int fd;                     /* unit number from the open */ 2

    UAGT_CAM_CCB ua_ccb;        /* local uagt structure */ 3
    CCB_SCSIIO ccb;             /* local CCB */ 4
    ALL_INQ_CDB *inq;           /* pointer for the CDB */ 5

    /* Make sure that all the arguments are there. */ 6

    if (argc != 4) {
     printf("SCSI INQ bus target lun\n");
     exit();
    }

    /* Convert the nexus information from the command line. */ 7

    id     = atoi(argv[1]);
    targid = atoi(argv[2]);
    lun    = atoi(argv[3]);
```

1 These two forward references define routines that are used later in the program to print out the INQUIRY data or to print out the CAM status if there was an error.

2 The file descriptor for the User Agent driver returned by the `open` system call, which executes in Section 2.5.1.3.

3 This line declares an uninitialized local data structure, `ua_ccb`, of the type UAGT_CAM_CCB, which is defined in the file `/usr/sys/h/uagt.h`. This structure is copied from user space into kernel space as part of the `ioctl` system call. Section 2.5.1.7 describes this procedure.

4 This line declares an uninitialized local data structure, `ccb`, of the type CCB_SCSIIO , which is defined in the file `/usr/sys/h/cam.h`. The members of this structure needed for the XPT_SCSI_IO request are filled in Section 2.5.1.4. The members of this structure needed for the INQUIRY command are filled in Section 2.5.1.5.

5 This line declares a pointer, `inq`, to a data structure, ALL_INQ_CDB, which is defined in the file `/usr/sys/h/scsi_all.h.` This structure is filled in Section 2.5.1.5.

6 This section of code makes sure the user entered the correct number of arguments. The user should have entered the string `inq`, followed by three numeric characters representing the bus, target, and LUN to be checked for a valid status.

7 This section of code converts the numeric characters entered and assigns them, in order, to bus, target, and LUN.

### 2.5.1.3 The User Agent Open Section

This section describes the portion of the User Agent sample inquiry application program where the User Agent is opened.

```
/* Open the User Agent driver and report any errors. */

if ((fd = open("/dev/cam", O_RDWR, 0)) < 0 ) 1
{
 perror("Error on CAM UAgt Open:");
 exit(1);
}
```

1 The program attempts to open the User Agent device special file, `/dev/cam,` with the O_RDWR flag, which allows reading and writing. If the file descriptor returned by the `open` system call indicates that the open failed by returning a negative value, `< 0`, the program reports an error and exits. Otherwise, the program opens the device.

### 2.5.1.4 Filling in XPT_SCSI_IO Request CCB_HEADER Fields

This section describes the portion of the User Agent sample inquiry application program where the members of the CCB_HEADER needed for an XPT_SCSI_IO request are filled in.

```
/* Set up the CCB for an XPT_SCSI_IO request.  The INQUIRY command
   will be sent to the device, instead of sending an XPT_GDEV_TYPE. */

/* Set up the CAM header for the XPT_SCSI_IO function. */

ccb.cam_ch.my_addr = (struct ccb_header *)&ccb; /* "Its" address */ 1
ccb.cam_ch.cam_ccb_len = sizeof(CCB_SCSIIO);    /* a SCSI I/O CCB */
ccb.cam_ch.cam_func_code = XPT_SCSI_IO;         /* the opcode */
ccb.cam_ch.cam_path_id = id;             /* selected bus */ 2
```

```
ccb.cam_ch.cam_target_id = targid;        /* selected target */
ccb.cam_ch.cam_target_lun = lun;                /* selected lun */

/* The needed CAM flags are : CAM_DIR_IN - The data will come from
the target, CAM_DIS_AUTOSENSE - Do not issue a REQUEST SENSE packet
if there is an error. */

ccb.cam_ch.cam_flags = CAM_DIR_IN | CAM_DIS_AUTOSENSE; 3
```

1 This section of code fills in some of the CCB_HEADER fields of the SCSI I/O CCB structure defined as `ccb`, for processing by the XPT layer. The structure was declared in Section 2.5.1.2.

2 These three lines assign the bus, target, and LUN to the corresponding fields in the CCB_HEADER structure.

3 This line sets the necessary CAM flags for the INQUIRY: CAM_DIR_IN, which specifies that the direction of the data is incoming; and CAM_DIS_AUTOSENSE, which disables the autosense feature. These flags are defined in `/usr/sys/h/cam.h`.

### 2.5.1.5 Filling in INQUIRY Command CCB_HEADER Fields

This section describes the portion of the User Agent sample inquiry application program where the members of the CCB_HEADER needed for the INQUIRY command are filled in. This is the structure that is passed to the XPT layer by the User Agent driver.

```
/* Set up the rest of the CCB for the INQUIRY command. */

ccb.cam_data_ptr = &buf[0];               /* where the data goes */ 1
ccb.cam_dxfer_len = INQUIRY_LEN;          /* how much data */
ccb.cam_timeout = CAM_TIME_DEFAULT;/* use the default timeout */ 2
ccb.cam_cdb_len = sizeof( ALL_INQ_CDB ); /* how many bytes for inquiry */3

/* Use a local pointer to access the particular fields in the INQUIRY
   CDB. */

inq = (ALL_INQ_CDB *)&ccb.cam_cdb_io.cam_cdb_bytes[0]; 4

inq->opcode = ALL_INQ_OP;                 /* inquiry command */ 5
inq->evpd = 0;                           /* no product data */
inq->lun = 0;                           /* not used in SCSI-2 */
inq->page = 0;                          /* no product pages */
inq->alloc_len = INQUIRY_LEN;             /* for the buffer space */
inq->control = 0;                         /* no control flags */
```

1 This line sets the `cam_data_ptr` member of the SCSI I/O CCB structure to the address of the first element in the `buf` array, which is defined as 36 bytes in Section 2.5.1.1.

2 This line specifies using the default timeout, which is the value assigned to the CAM_TIME_DEFAULT constant. This constant is set in the `/usr/sys/h/cam.h` file to indicate that the SIM layer's default timeout is to be used. The current value of the SIM layer's default timeout is five seconds.

3 This line sets the length of the Command Descriptor Block in the CCB to the length of an inquiry CDB.. The inquiry CDB, ALL_INQ_CDB, which is defined in the `/usr/sys/h/scsi_all.h` file, is six bytes.

4 This line assigns the `inq` pointer, which is type ALL_INQ_CDB, to the address of the `cam_cdb_bytes` member of the CDB_UN union. This union is defined in `/usr/sys/h/cam.h` as the `cam_cdb_io` member of the SCSI I/O CCB structure.

5 These lines use the `inq` pointer to access the fields of the `cam_cdb_bytes` array within the `ccb` structure as though it is an ALL_INQ_CDB structure. The ALL_INQ_CDB structure is defined in the `/usr/sys/h/scsi_all.h` file.

### 2.5.1.6 Filling in the UAGT_CAM_CCB Fields

This section describes the portion of the User Agent sample inquiry application program where the members of the UAGT_CAM_CCB structure are filled in for the `ioctl` call. This is the structure that is passed to the User Agent driver.

```
/* Set up the fields for the User Agent Ioctl call. */

ua_ccb.uagt_ccb = (CCB_HEADER *)&ccb;     /* where the CCB is */ 1
ua_ccb.uagt_ccblen = sizeof(CCB_SCSIIO);  /* how many bytes to pull in */ 2
ua_ccb.uagt_buffer = &buf[0];             /* where the data goes */ 3
ua_ccb.uagt_buflen = INQUIRY_LEN;           /* how much data */ 4

ua_ccb.uagt_snsbuf = (u_char *)NULL;        /* no Autosense data */ 5
ua_ccb.uagt_snslen = 0;                     /* no Autosense data */
ua_ccb.uagt_cdb = (CDB_UN *)NULL;           /* CDB is in the CCB */ 6
ua_ccb.uagt_cdblen = 0;                     /* CDB is in the CCB */
```

1 This line initializes the `uagt_ccb` member of the `ua_ccb` structure with the address of the local CCB_HEADER structure, `ccb.`

2 This line sets the length of the `uagt_ccblen` member to the length of the SCSI I/O CCB structure that will be used for this call.

3 This line initializes the `uagt_buffer` member with the user space address of the array `buf,` which was allocated 36 bytes in Section 2.5.1.1.

4 This line initializes the `uagt_buflen` member with the value of the constant INQUIRY_LEN, which is the number of bytes of inquiry data that will be returned.

5 These two lines reflect that the autosense features are turned off in the CAM flags.

6 These two lines reflect that the Command Descriptor Block information is in the SCSI I/O CCB structure filled in Section 2.5.1.4.

### 2.5.1.7 Sending the CCB to the CAM Subsystem

This section describes the portion of the User Agent sample inquiry application program where the `ccb` is sent to the CAM subsystem.

```
/* Send the CCB to the CAM subsystem using the User Agent driver,
   and report any errors. */

if( ioctl(fd, UAGT_CAM_IO, (caddr_t)&ua_ccb) < 0 ) 1
{
   perror("Error on CAM UAGT Ioctl:");
    close(fd);                          /* close the CAM file */ 2
   exit(1);
```

```
    }

    /* If the CCB completed successfully, then print out the INQUIRY
     information; if not, report the error. */

    if (ccb.cam_ch.cam_status != CAM_REQ_CMP)
    {
       print_ccb_status( &(ccb.cam_ch) );  /* report the error values */ 3
    }
    else
    {
       print_inq_data( &buf[0] );       /* report the INQUIRY info */ 4
    }
}
```

1 This line passes the local UAGT_CAM_CCB structure, `ua_ccb`, to the User Agent driver, using the `ioctl` system call. The arguments passed are the file descriptor returned by the `open` system call; the User Agent `ioctl` command, UAGT_CAM_IO, which is defined in the `/usr/sys/h/uagt.h` file; and the contents of the `ua_ccb` structure. The User Agent driver copies in the SCSI I/O CCB and sends it to the XPT layer. When the I/O completes, the User Agent returns to the application program, returning status within the `ua_ccb` structure.

2 If the `ioctl` call fails, this code displays an error message, closes the device special file, `/dev/cam`, and exits.

3 If the CAM status is anything other than CAM_REQ_CMP, indicating the request completed, an error message is printed indicating the CAM status returned.

4 If the request completes, the `print_inq_data` routine is called to display the INQUIRY data.

### 2.5.1.8 Print INQUIRY Data Routine

This section of the User Agent sample inquiry application program converts the rest of the fields of inquiry data to a human-readable form and sends it to the user's screen.

```
/* Define the type and qualifier string arrays as globals to allow for
   compile-time initialization of the information. */

     caddr_t periph_type[] = {       /* Peripheral Device Type */
             "Direct-access",        /* 00h */
             "Sequential-access",    /* 01h */
             "Printer",              /* 02h */
             "Processor",            /* 03h */
             "Write-once",           /* 04h */
             "CD-ROM",               /* 05h */
             "Scanner",              /* 06h */
             "Optical memory",       /* 07h */
             "Medium changer",       /* 08h */
             "Communications",       /* 09h */
             "Graphics Arts"         /* 0Ah */
    };       /* Same as 0A */        /* 0Bh */
             /* Reserved */          /* 0Ch - 1Eh */
             /* Unknown */           /* 1Fh */

     caddr_t periph_qual[] = {       /* Peripheral Qualifier */
             "Device supported, is (may be) connected", /* 000b */
             "Device supported, is not connected",     /* 001b */
```

```
                "<Reserved qualifier>",                  /* 010b */
                "No device supported for this Lun"       /* 011b */
        };      /* Vendor specific */                    /* 1xxb */

/* ------------------------------------------------------------ */
/* Local routine to print out the INQUIRY data to the user. */

void
print_inq_data( ip ) 1
    ALL_INQ_DATA *ip;
{
       char vendor_id[9]; 2
       char prod_id[17];
       char prod_rev_lvl[5];
        caddr_t periph_type_ptr, periph_qual_ptr;
        int  ptype;

       /* Make local copies of the ASCII text, so that it can be NULL
          terminated for the printf() routine. */

       strncpy(vendor_id, (caddr_t)ip->vid, 8); 3
       vendor_id[8] = '\0';
       strncpy(prod_id, (caddr_t)ip->pid, 16);
       prod_id[16] = '\0';
       strncpy(prod_rev_lvl, (caddr_t)ip->revlevel, 4);
       prod_rev_lvl[4] = '\0';

        /* Convert sparse device type and qualifier values into strings */

        ptype = ip->dtype; 4
        periph_type_ptr = "Reserved";
        if (ptype == 0x1F) periph_type_ptr = "Unknown";
        if (ptype == 0x0B) ptype = 0x0A;
        if (ptype <= 0x0A) periph_type_ptr = periph_type[ptype];

        periph_qual_ptr = "<Vendor Specific qualifier>";
        if (ip->pqual <= 3) periph_qual_ptr = periph_qual[ip->pqual];

        printf("Periph Device Type   = 0x%X = %s Device\n", 5
                ip->dtype, periph_type_ptr);
        printf("Periph Qualifier     = 0x%X = %s\n", ip->pqual,
                periph_qual_ptr);
        printf("Device Type Modifier = 0x%X\tRMB  = 0x%X = Medium %s\n",
               ip->dmodify, ip->rmb, (ip->rmb?"is removable":
                "is not removable"));
        printf("ANSI Version = 0x%X\t\tECMA Version = 0x%X\n",
                ip->ansi, ip->ecma);
        printf("ISO Version  = 0x%X\t\tAENC = 0x%X\tTrmIOP = 0x%X\n",
                ip->iso, ip->aenc, ip->trmiop);
        printf("Response Data Format   = 0x%X\tAddit Length = 0x%d\n",
                ip->rdf, ip->addlen);
        printf("SftRe  = 0x%XCmdQue = 0x%X\tLinked = 0x%X\tSync = 0x%X\n",
                ip->sftre, ip->cmdque, ip->linked, ip->sync);
        printf("Wbus16 = 0x%X\tWbus32 = 0x%X\tRelAdr = 0x%X\n",
                ip->wbus16, ip->wbus32, ip->reladdr);
        printf("Vendor Identification  = %s\nProduct Identification = %s\n",
                vendor_id, prod_id );
        printf("Product Revision Level = %s\n\n",
                prod_rev_lvl);
       fflush(stdout); 6
}
```

1 This line declares the `print_inq_data` function that prints out the INQUIRY data for a valid nexus. The function's argument, `ip`, is a pointer to the ALL_INQ_DATA structure defined in the `/usr/sys/h/scsi_all.h` file.

2 These three lines declare three character arrays to contain the Vendor ID, the Product ID, and the Product revision level to be displayed. Each array is declared with one extra byte to hold the NULL string terminator.

3 This section copies the ALL_INQ_DATA member, `vid`, into the local array `vendor_id`; the ALL_INQ_DATA member, `pid`, into the local array `prod_id`; and the ALL_INQ_DATA member, `revlevel`, into the local array, `prod_rev_lvl.` The arrays are passed to the standard C library function, `strncopy`, which copies the data and then terminates each string copy with a NULL, so that it can be output to the `printf` function in the format desired.

4 This section converts the device type and qualifier values into human-readable words. The conversions are performed on defined and undefined numeric combinations.

5 This section decodes and displays the inquiry data as hexadecimal numbers and strings.

6 This line calls the standard C I/O function, `fflush`, to write out the data from the internal buffers.

### 2.5.1.9 Print CAM Status Routine

This section describes the portion of the User Agent sample inquiry application program that defines the routine to print out the CAM status for an invalid nexus.

```
/* ------------------------------------------------------------ */
/* Local routines and data structure to report in text and Hex
form the returned CAM status. */

struct cam_statustable { 1
      u_char      cam_status;
      caddr_t     status_msg;
} cam_statustable[] = { 2
    { CAM_REQ_INPROG,         "CCB request is in progress"      },
    { CAM_REQ_CMP ,           "CCB request completed w/out error"     },
    { CAM_REQ_ABORTED,        "CCB request aborted by the host"      },
    { CAM_UA_ABORT,           "Unable to Abort CCB request"           },
    { CAM_REQ_CMP_ERR,        "CCB request completed with an err"     },
    { CAM_BUSY,               "CAM subsystem is busy"                 },
    { CAM_REQ_INVALID,        "CCB request is invalid"                },
    { CAM_PATH_INVALID,       "Bus ID supplied is invalid"      },
    { CAM_DEV_NOT_THERE,      "Device not installed/there"            },
    { CAM_UA_TERMIO,          "Unable to Terminate I/O CCB req"      },
    { CAM_SEL_TIMEOUT,        "Target selection timeout"        },
    { CAM_CMD_TIMEOUT,        "Command timeout"           },
    { CAM_MSG_REJECT_REC,     "Reject received"                 },
    { CAM_SCSI_BUS_RESET,     "Bus reset sent/received"         },
    { CAM_UNCOR_PARITY,       "Parity error occured"            },
    { CAM_AUTOSENSE_FAIL,     "Request sense cmd fail"          },
    { CAM_NO_HBA,             "No HBA detected Error"           },
    { CAM_DATA_RUN_ERR,       "Overrun/underrun error"          },
    { CAM_UNEXP_BUSFREE,      "BUS free"                  },
    { CAM_SEQUENCE_FAIL,      "Bus phase sequence failure"      },
    { CAM_CCB_LEN_ERR,        "CCB length supplied is inadaquate"     },
    { CAM_PROVIDE_FAIL,       "To provide requ. capability"           },
    { CAM_BDR_SENT,           "A SCSI BDR msg was sent to target"     },
    { CAM_REQ_TERMIO,         "CCB request terminated by the host"    },
```

```
    { CAM_LUN_INVALID,       "LUN supplied is invalid"              },
    { CAM_TID_INVALID,       "Target ID supplied is invalid"        },
    { CAM_FUNC_NOTAVAIL,     "Requested function is not available"  },
    { CAM_NO_NEXUS,          "Nexus is not established"             },
    { CAM_IID_INVALID,       "The initiator ID is invalid"          },
    { CAM_CDB_RECVD,         "The SCSI CDB has been received"      },
    { CAM_SCSI_BUSY,         "SCSI bus busy"                        },
    { CAM_SIM_QFRZN,         "The SIM queue is frozen"             },
    { CAM_AUTOSNS_VALID,     "Autosense data valid for target"     }
};
int cam_statusentrys = sizeof(cam_statustable) / \
                       sizeof(cam_statustable[0]); 3

char *
camstatus( cam_status ) 4
    register u_char cam_status;
{
      register struct cam_statustable *cst = cam_statustable; 5
      register entrys;

      for( entrys = 0; entrys < cam_statusentrys; cst++ ) { 6
            if( cst->cam_status == cam_status ) {
                  return( cst->status_msg );
            }
      }
      return( "Unknown CAM Status" );
}

void
print_ccb_status(cp) 7
CCB_HEADER *cp;
{
      printf( "cam_status = 0x%X\t (%s%s%s)\n", cp->cam_status,
      ((cp->cam_status & CAM_AUTOSNS_VALID) ? "AutoSns Valid-" : "" ),
      ((cp->cam_status & CAM_SIM_QFRZN) ? "SIM Q Frozen-" : "" ),
      camstatus( cp->cam_status & CAM_STATUS_MASK ));
      fflush(stdout); 8
}
```

1 This line defines an array of structures. It is declared as a global array to allow compile-time initialization. Each structure element of the array contains two members, `cam_status`, the CAM status code, and `status_msg`, a brief description of the meaning of the status code. The CAM status codes and messages are defined in the `/usr/sys/h/cam.h` file.

2 These lines initialize the CAM status array with the status values and their text equivalents.

3 This line declares an integer variable whose contents equal the size of the total CAM status array divided by the size of an individual array element. This integer is the number of the element in the array.

4 The next two lines define a function that returns a pointer to a text string with the `cam_status` field of the CCB_HEADER as an argument. The `cam_status` member is declared as a register variable so that its values are stored in a machine register for efficiency.

5 This line declares a register structure pointer to point to each element of the CAM status array and initializes it to point to the beginning of the CAM status array. A local register variable, `entrys`, will be used to traverse the CAM status array.

6 This section of code examines each element in the array, incrementing `cst` until a match between the status from the CCB and a status value in the array is found,

in which case the address of the CAM status description string, `status_msg`, is returned. If all the elements are examined without a match, the "Unknown CAM Status" message address is returned.

7 The next two lines define a routine that uses a pointer to the CCB_HEADER structure of the INQUIRY CCB and calls the C library routine, `printf`, to print out the hexadecimal value and the appropriate description of the CAM status returned.

8 This line calls the standard C I/O function, `fflush`, to write out the data from the internal buffers.

### 2.5.1.10 Sample Output for a Valid Nexus

This section contains an example of the output of the User Agent sample inquiry application program when the user enters a valid nexus.

```
#inq 0 0 0

Periph Device Type = 0x0        Periph Qualifier = 0x0 1
Device Type Modifier = 0x0      RMB = 0x0
ANSI Version = 0x1              ECMA Version = 0x0
ISO Version = 0x0               AENC = 0x0      TrmIOP = 0x0
Response Data Format = 0x1      Addit Length = 0x31
SftRe = 0x0     CmdQue = 0x0    Linked = 0x0    Sync = 0x1
Wbus16 = 0x0    Wbus32 = 0x0    RelAdr = 0x0
Vendor ID = DEC 2
Product ID = RZ56     (C) DEC 3
Product Rev Level = 0300 4
```

1 See the American National Standard for Information Systems, *Small Computer Systems Interface - 2* (SCSI - 2), X3T9/89-042 for a description of each of the fields of the inquiry data returned.

2 This line shows the value of the `vendor_id` variable declared in the `print_inq_data` routine in Section 2.5.1.8 as a local copy of the text string.

3 This line shows the value of the `prod_id` variable declared in the `print_inq_data` routine in Section 2.5.1.8 as a local copy of the text string.

4 This line shows the value of the `prod_rev_lvl` variable declared in the `print_inq_data` routine in Section 2.5.1.8 as a local copy of the text string.

### 2.5.1.11 Sample Output for an Invalid Nexus

This section contains an example of the output of the User Agent sample inquiry application program when the user enters an invalid nexus.

```
#inq 0 2 0

cam_status = 0x4A       (SIM Q Frozen-Target selection timeout) 1
```

1 This line shows that the contents of the `cam_status` member of the CCB_HEADER structure returned was CAM_SIM_QFRZN, which indicates a lack of response from the specified nexus. See the `cam_statustable` in Section 2.5.1.9.

### 2.5.2 Sample User Agent Scanner Driver Program

This section contains the User Agent sample scanner program, `cscan.c`, with annotations to the code. It also contains the `cscan.h` file, which defines the WINDOW_PARAM_BLOCK structure used in the program.

#### 2.5.2.1 Scanner Program Header File

This section describes the header file, `cscan.h`, that contains definitions of structures for the program to use.

```
/* cscan.h   Header file for cscan.c (CAM Scanner driver)  28-Oct-1991 */

/* Scanner Window Parameter Block definition; all multi-byte quantities
   are defined as unsigned bytes due to the need to store the values in
   swapped order. */

typedef struct {
      u_char rsvd1[6];   /* Reserved bytes in Header: Must Be Zero */
      u_char WDBLen[2];  /* Number of Window Parameter bytes following */ 1
      u_char WID;          /* Window ID: Must Be Zero */
      u_char rsvd2;  /* Reserved bytes in Header: Must Be Zero */
      u_char XRes[2];      /* X-axis resolution: MUST be same as YRes */
      u_char YRes[2];      /* Y-axis resolution: MUST be same as XRes */
      u_char UpLeftX[4]; /* Upper left X positon of scan window */
      u_char UpLeftY[4]; /* Upper left Y positon of scan window */
      u_char Width[4];   /* Scan width (Y-axis length) */
      u_char Length[4];  /* Scan length (X-axis length) */
      u_char Bright;       /* Brightness: Must Be Zero */
      u_char Thresh;       /* Threshold: Must Be Zero */
      u_char Contrast;   /* Contrast: Must Be Zero */
      u_char ImgTyp;       /* Image type: 0 = bi-level mono; 2 = multi-level
                              mono; 3 = bi-level full color; 5 = multi-
                              level full color; others reserved */
      u_char PixBits;      /* Bits per pixel: 1 = bi-level; 4 = 16 shades;
                              8 = 256 shades; others reserved */
      u_char HalfTone[2];/* Halftone Pattern: Must Be Zero */
      u_char PadTyp:3;   /* Padding type for non-byte pixels: MUST BE 1 */
      u_char rsvd3:4;      /* Reserved bits: Must Be Zero */
      u_char RevImg:1;   /* 0 = normal image; 1 = reverse image */
      u_char BitOrder[2];/* Bit ordering: Must Be Zero */
      u_char CompTyp;      /* Compression type: Must Be Zero */
      u_char CompArg;      /* Compression argument: Must Be Zero */
      u_char rsvd4[6];   /* Reserved: Must Be Zero */
      u_char HdrSel;       /* Header select (return with data): 0 = no header;
                              1 = return header with data; others reserved */
      u_char ColorSel;   /* Color select (selects color to use when doing a
                            mono-color scan): 0 = default to Green; 1 =
                            scan using Red; 2 = scan using Green; 3 =
                            scan using Blue; others reserved */
      u_char ImgCorr;      /* Image data correction method: 0 = default to
                              normal; 1 = soft image; 2 = enhance (low);
                              3 = enhance (high); others reserved */
      u_char ThreshR;      /* Threshold level, Red: 0 = default level */
      u_char ThreshG;    /* Threshold level, Green: 0 = default level */
      u_char ThreshB;    /* Threshold level, Blue: 0 = default level */
      u_char ShtTyp:1;   /* Sheet type: 0 = reflection; 1 = transparency */
      u_char rsvd5:3;      /* Reserved bits: Must Be Zero */
      u_char ShtDen:4;   /* Sheet density (transparency): 0 = normal; 1 =
                            light; 2 = dark; others reserved */
}WINDOW_PARAM_BLOCK;
```

1 The length in bytes of a single scan window descriptor. The first 48 bytes are defined in the American National Standard for Information Systems, *Small Computer Systems Interface - 2* (SCSI - 2), X3T9/89-042 and the remaining bytes are vendor-specific. The specific structure members used may depend on the scanner device.

### 2.5.2.2 The Include Files Section

This section, which is the beginning of the `cscan` program, describes the portion of the User Agent sample scanner program that lists the `include` files for the program.

```
/* ------------------------------------------------------------------ */
/* Include files needed for this program. */

#include <stdio.h>
#include <unistd.h>
#include <sys/file.h>
#include <sys/types.h>
#include <sys/ioctl.h>
#include <sys/uio.h>
#include <strings.h>
#include <ctype.h>
#include <math.h>
#include <sys/cam.h>         /* CAM defines from the CAM document */
#include <sys/dec_cam.h>   /* CAM defines for Digital CAM source files */
#include <sys/uagt.h>       /* CAM defines for the UAgt driver */
#include <sys/scsi_all.h> /* CAM defines for ALL SCSI devices */
#include "cscan.h"       /* Scanner structure definitions */
```

### 2.5.2.3 The CDB Setup Section

This section describes the portion of the User Agent sample scanner program that defines the CDBs for the program.

```
/* The Define Window Parameters CDB (10 bytes).  */

typedef struct {
        u_char  opcode;         /* 24 hex                    */
        u_char          : 5,     /* 5 bits reserved           */
                lun     : 3;    /* logical unit number       */
        u_char          : 8;    /* Reserved byte             */
        u_char          : 8;    /* Reserved byte             */
        u_char          : 8;    /* Reserved byte             */
        u_char          : 8;    /* Reserved byte             */
        u_char  param_len2;     /* MSB parameter list length */ 1
        u_char  param_len1;     /*     parameter list length */
        u_char  param_len0;     /* LSB parameter list length */
        u_char  control;        /* The control byte          */
}SCAN_DEF_WIN_CDB;

/* The Define Window Parameters op code */

#define SCAN_DEF_WIN_OP           0x24

/* The Read (data or gamma table) CDB (10 bytes).  */

typedef struct {
        u_char  opcode;         /* 28 hex                     */
        u_char          : 5,    /* 5 bits reserved            */
                lun     : 3;    /* logical unit number        */
        u_char  tran_type;      /* transfer data type:         */
```

```
                                /*   0=data, 3=gamma           */ 2
        u_char          : 8;    /* Reserved byte               */
        u_char  tran_id1;       /* MSB transfer identification */ 3
        u_char  tran_id2;       /* LSB trans id:               */
                                /*   0 =data, 1/2/3= gamma     */
        u_char  param_len2;     /* MSB parameter list length   */
        u_char  param_len1;     /*     parameter list length   */
        u_char  param_len0;     /* LSB parameter list length   */
        u_char  control;        /* The control byte            */
}SCAN_READ_CDB;

/* The Read (data or gamma table) op code */

#define SCAN_READ_OP        0x28
```

1 The parameter list length members specify the number of bytes sent during the DATAOUT phase. The parameters are usually mode parameters, diagnostic parameters, and log parameters that are sent to a target. If set to 0 (zero), no data is to be transferred.

2 The types of data that are to be read. The choices are: image data scan lines or gamma correction table data.

3 These two bytes are used with the transfer type byte to indicate that the data to be read is image scan lines, 0 (zero), or one of the following types of gamma correction table data: red, 1; green, 2; or blue, 3.

#### 2.5.2.4 The Definitions Section

This section describes the portion of the User Agent sample scanner program that specifies the local definitions and initializes data.

```
/* ------------------------------------------------------------ */
/* Local defines */
#define SENSE_LEN18    /* max sense length from scanner */ 1

/* ------------------------------------------------------------ */
/* Initialized and uninitialized data. */

u_char sense[ SENSE_LEN ]; 2
```

1 This line defines a constant of 18 bytes for the length of the sense data from the scanner.

2 This line declares a character array, `sense`, with a size of 18 bytes as defined by the SENSE_LEN constant.

#### 2.5.2.5 The Main Program Section

This section describes the `main` program portion of the User Agent sample scanner program.

```
/* ------------------------------------------------------------------- */
/* The main code path.  The CCB/CDB and UAGT_CAM_CCB are set up for the
   DEFINE WINDOW PARAMETERS and READ commands to the Bus/Target/LUN. */

main(argc, argv,envp)
int argc;
char *argv[];
```

```
char *envp[];
{

/* ------------------------------------------------------------------- */
/* Local variables and structures */

    extern void clear_mem(); 1
    extern void swap_short_store();
    extern void swap_long_store();

    u_char id, targid, lun;           /* from envir variable SCAN-NEXUS */ 2
    char *cp;
    int nexus;

    int fd;                           /* unit number for the CAM open */ 3
    int od;                           /* unit number for the file open */ 4
    char FileHead[200];          /* buffer for file header info */
    int i, n;
    u_char *bp;                       /* general usage byte pointer */
    int retry_cnt;               /* error retry counter */
    int reset_flag;              /* flag to indicate reset tried */

    double Xwid, Ylen;                /* scan area in inches */ 5
    u_short WXYRes;              /* variables for window calulations */
    u_long WWidth, WLength, WinPix, LineBytes, TotalBytes; 6
    u_char WHdrSel; 7

    UAGT_CAM_CCB ua_ccb_sim_rel;  /* local uagt structure */ 8
    CCB_RELSIM ccb_sim_rel;           /* local CCB */ 9
    UAGT_CAM_CCB ua_ccb_reset_dev;    /* local uagt structure */ 10
    CCB_RESETDEV ccb_reset_dev;       /* local CCB */ 11

    UAGT_CAM_CCB ua_ccb;         /* local uagt structure */ 12
    CCB_SCSIIO ccb;              /* local CCB */ 13
    SCAN_DEF_WIN_CDB *win;       /* pointer for window def CDB */ 14
    SCAN_READ_CDB *read;              /* pointer for read CDB */ 15

    WINDOW_PARAM_BLOCK Window;        /* parameter block, window def */ 16

    u_char ReadData[ 400*12*3 ]; /* Max bytes/line */ 17
    u_char *RDRp, *RDGp, *RDBp;  /* Red, Green, Blue pointers */
    u_char WriteData[ 400*12*3 ];     /* Max bytes/line */ 18
    u_char *WDp;                      /* WriteData pointer */
```

1 These forward references declare routines that are used later in the program. The routines are defined in Section 2.5.2.14.

2 The bus, target, and LUN are specified in octal digits in the SCAN-NEXUS environment variable. The value for the LUN should be 0 (zero).

3 The file descriptor for the User Agent driver returned by the `open` system call, which executes in Section 2.5.2.7.

4 The file descriptor for the output file returned by the `open` system call, which executes in Section 2.5.2.7.

5 Real values to contain the `X` and `Y` dimensions of the scan window.

6 Variables to hold calculated information about the scan window.

7 Variable to hold the flag byte indicating whether a window header is to be returned with the data. The value of the variable is stored in the `HdrSel` member of the WINDOW_PARAM_BLOCK structure is set to 1. The WINDOW_PARAM_BLOCK is defined in Section 2.5.2.1.

8 This line declares an uninitialized local data structure, `ua_ccb_sim_rel`, to be used for the RELEASE SIM QUEUE CCB command.

9 This line declares an uninitialized local data structure, `ccb_sim_rel`, of the type CCB_RELSIM , which is defined in the file `/usr/sys/h/cam.h`.

10 This line declares an uninitialized local data structure, `ua_ccb_reset_dev`, to be used for the BUS DEVICE RESET CCB command.

11 This line declares an uninitialized local data structure, `ccb_reset_dev`, of the type CCB_RESETDEV , which is defined in the file `/usr/sys/h/cam.h`.

12 This line declares an uninitialized local data structure, `ua_ccb`, of the type UAGT_CAM_CCB, which is defined in the file `/usr/sys/h/uagt.h`. This structure is copied from user space into kernel space as part of the `ioctl` system call.

13 This line declares an uninitialized local data structure, `ccb`, of the type CCB_SCSIIO , which is defined in the file `/usr/sys/h/cam.h`.

14 This line declares a pointer to the data structure SCAN_DEF_WIN_CDB , which is defined in Section 2.5.2.3.

15 This line declares a pointer to the data structure SCAN_READ_CDB , which is defined in Section 2.5.2.3.

16 This line declares an uninitialized local data structure, `Window`, of the type WINDOW_PARAM_BLOCK , which is defined in Section 2.5.2.1.

17 This line declares an array to contain a scan line of the maximum size that can be read, which is 14,400 bytes. This array is used to read a scan line from the scanner.

18 This line declares an array large enough to contain the maximum-size scan line, which is 14,400 bytes. This array is used to write the scan line, converted to 3-byte pixels, to the output file.

### 2.5.2.6 The Nexus Conversion Section

This section describes the portion of the User Agent sample scanner program where the nexus information contained in the SCAN-NEXUS environment variable is converted to the values for bus, target, and LUN.

```
/* Find the environment variable SCAN-NEXUS. If not found, return
   error message.  If found, convert the nexus information from the
   variable to bus, target ID and LUN values.  Return an error
   message if any of the values are not octal digits. */

    nexus = 0;                              /* Reset valid data flag */
    for (i=0; envp[i] != NULL; i++)
    {
      cp = envp[i]; 1
      if (strncmp(cp,"SCAN-NEXUS=",11) == 0)/* Find environment variable */
      {
        nexus = -1;                           /* Set tentative flag */
        cp += 11;                                   /* Advance to data */
        if (*cp < '0' || *cp > '7') break; 2
        id = (u_char)(*cp++) - (u_char)('0');
        if (*cp++ != ' ') break;
        if (*cp < '0' || *cp > '7') break;
        targid = (u_char)(*cp++) - (u_char)('0');
        if (*cp++ != ' ') break;
```

```
      if (*cp < '0' || *cp > '7') break;
      lun = (u_char)(*cp) - (u_char)('0');
      nexus = 1;                    /* Set good data flag */
    }
  }
  if (nexus == -1) 3
  {
    printf("Invalid SCAN-NEXUS; set to octal digits 'bus target lun'\n");
    exit(1);
  }
  if (nexus == 0) 4
  {
    printf("Set environment variable SCAN-NEXUS to 'bus target lun' (octal\
                              digits)\n\n");
    exit(1);
  }
  printf("Scanner nexus set to: bus %d, target %d, LUN %d\n\n",id, \
                              targid, lun); 5
```

1 This section scans through all of the environment variables passed to the program by the system, looking for the variable SCAN-NEXUS.

2 This section checks to make sure SCAN-NEXUS contains octal digits for bus, target, and LUN.

3 This error message appears if the digits are not octal.

4 This error message appears if SCAN-NEXUS is not set.

5 This message displays the values for bus, target, and LUN.

### 2.5.2.7 The Parameter Assignment Section

This section describes the portion of the User Agent sample scanner program that assigns the parameters entered by the user on the command line to the appropriate variables and opens the necessary files.

```
/* Make sure that the correct number of arguments are present.
   If not, return an error message with usage information. */

    if (argc != 5) { 1
      printf("Usage is: cscan XYres Xwid Ylen out_file\n");
      printf(" XYres is integer pix/inch; Xwid & Ylen are real \
                              inches\n\n");
      exit();
    }

/* Convert the parameter information from the command line. */

    WXYRes = atoi(argv[1]);       /* X & Y resolution */
    Xwid   = atof(argv[2]);       /* X width in inches */
    Ylen   = atof(argv[3]);       /* Y length in inches */

/* Verify that the X & Y resolution is one of the legal values */

    switch (WXYRes) 2
    {
      case 25:
      case 150:
      case 200:
      case 300:
      case 400:
        break;
```

```
      default:
        printf("Illegal X & Y resolution; must be 25, 150, 200, \
                                  300, 400\n");
      exit(1);
    }

/* Verify that the X width is positive and less than 11.69 inches */ 3

    if (Xwid < 0 || Xwid > 11.69)
    {
      printf("X width must be positive and less than 11.69 inches\n");
      exit(1);
    }

/* Verify that the Y length is positive and less than 17.00 inches */

    if (Ylen < 0 || Ylen > 17.00)
    {
      printf("Y length must be positive and less than 17.00 inches\n");
      exit(1);
    }

/* Open the output file ("truncating" it if it exists) and report */
/* any errors. */ 4

    if ((od = open(argv[4], O_WRONLY|O_CREAT|O_TRUNC, 0666)) < 0 )
    {
      perror("Error on Output File Open");
      exit(1);
    }

/* Open the User Agent driver and report any errors. */

    if ((fd = open("/dev/cam", O_RDWR, 0)) < 0 )
    {
      perror("Error on CAM UAgt Open");
      exit(1);
    }
```

1 The user enters the X and Y scan resolutions in pixels per inch, the width (X) and length (Y) of the scan area in inches, and the name of the output file on the command line.

2 This section checks for the legal scan resolutions the user can enter.

3 These two sections check that the user entered legal values for X and Y.

4 These two sections open the User Agent driver and the output file.

### 2.5.2.8 The Data Structure Setup Section

This section describes the portion of the User Agent sample scanner program that sets up the data structures for the XPT_REL_SIMQ and XPT_RESET_DEV commands.

```
/* -- Begin static setups of SIMQ Release and Device Reset structures -- */

/* Set up the CCB for an XPT_REL_SIMQ request. */

/* Set up the CAM header for the XPT_REL_SIMQ function. */

    ccb_sim_rel.cam_ch.my_addr = (struct ccb_header *)&ccb_sim_rel;
                                                        /* "Its" address */ 1
    ccb_sim_rel.cam_ch.cam_ccb_len = sizeof(CCB_RELSIM); /* a SIMQ release  */
```

```
    ccb_sim_rel.cam_ch.cam_func_code = XPT_REL_SIMQ;/* the opcode */
    ccb_sim_rel.cam_ch.cam_path_id   = id;                /* selected bus */
    ccb_sim_rel.cam_ch.cam_target_id = targid;            /* selected target */
    ccb_sim_rel.cam_ch.cam_target_lun = lun;              /* selected lun */

/* The needed CAM flags are: CAM_DIR_NONE - No data will be transferred. */

    ccb_sim_rel.cam_ch.cam_flags = CAM_DIR_NONE;

/* Set up the fields for the User Agent Ioctl call. */

    ua_ccb_sim_rel.uagt_ccb = (CCB_HEADER *)&ccb_sim_rel;
                                          /* where the CCB is */ 2
    ua_ccb_sim_rel.uagt_ccblen = sizeof(CCB_RELSIM); /* bytes in CCB */
    ua_ccb_sim_rel.uagt_buffer = (u_char *)NULL;     /* no data */
    ua_ccb_sim_rel.uagt_buflen = 0;                  /* no data */
    ua_ccb_sim_rel.uagt_snsbuf = (u_char *)NULL;  /* no Autosense data */
    ua_ccb_sim_rel.uagt_snslen = 0;                 /* no Autosense data */
    ua_ccb_sim_rel.uagt_cdb    = (CDB_UN *)NULL;  /* CDB is in the CCB */
    ua_ccb_sim_rel.uagt_cdblen = 0;                 /* CDB is in the CCB */

/* Set up the CCB for an XPT_RESET_DEV request. */

/* Set up the CAM header for the XPT_RESET_DEV function. */

    ccb_reset_dev.cam_ch.my_addr = (struct ccb_header *)&ccb_reset_dev;
                                                 /* "Its" address */ 3
    ccb_reset_dev.cam_ch.cam_ccb_len = sizeof(CCB_RESETDEV);/* a SCSI I/O CCB */
    ccb_reset_dev.cam_ch.cam_func_code = XPT_RESET_DEV;    /* the opcode */
    ccb_reset_dev.cam_ch.cam_path_id   = id;         /* selected bus */
    ccb_reset_dev.cam_ch.cam_target_id = targid;           /* selected target */
    ccb_reset_dev.cam_ch.cam_target_lun = lun;             /* selected lun */

/* The needed CAM flags are: CAM_DIR_NONE - No data will be transferred. */

    ccb_reset_dev.cam_ch.cam_flags = CAM_DIR_NONE;

/* Set up the fields for the User Agent Ioctl call. */

    ua_ccb_reset_dev.uagt_ccb = (CCB_HEADER *)&ccb_reset_dev;
                                          /* where the CCB is */ 4
    ua_ccb_reset_dev.uagt_ccblen = sizeof(CCB_RESETDEV);/* bytes in CCB */
    ua_ccb_reset_dev.uagt_buffer = (u_char *)NULL;  /* no data */
    ua_ccb_reset_dev.uagt_buflen = 0;                      /* no data */
    ua_ccb_reset_dev.uagt_snsbuf = (u_char *)NULL;  /* no Autosense data */
    ua_ccb_reset_dev.uagt_snslen = 0;                      /* no Autosense data */
    ua_ccb_reset_dev.uagt_cdb    = (CDB_UN *)NULL;  /* CDB is in the CCB */
    ua_ccb_reset_dev.uagt_cdblen = 0;                      /* CDB is in the CCB */

/* -- End of static setups of SIMQ Release and Device Reset structures -- */
```

1 This section of code fills in some of the CCB_HEADER fields of the RELEASE SIM QUEUE CCB structure defined as `ccb_sim_rel`, for the XPT_REL_SIMQ command. The structure was declared in Section 2.5.2.5

2 This section of code fills in some of the CCB_HEADER fields of the CCB_RELSIM structure defined as `ua_ccb_sim_rel`, for the RELEASE SIM QUEUE CCB command. The structure was declared in Section 2.5.2.5

3 This section of code fills in some of the CCB_HEADER fields of the CCB_RESETDEV structure defined as `ccb_reset_dev`, for the XPT_RESET_DEV command. The structure was declared in Section 2.5.2.5

4 This section of code fills in some of the CCB_HEADER fields of the CCB_RESETDEV structure defined as `ua_ccb_reset_dev`, for the BUS DEVICE RESET CCB command. The structure was declared in Section 2.5.2.5

### 2.5.2.9 The Window Parameters Setup Section

This section describes the portion of the User Agent sample inquiry application program that fills in the scan window parameters and sends a SCSI SET WINDOW PARAMETERS command to the scanner.

```
/* Fill in window parameters for scanner and send DEFINE WINDOW */
/* PARAMETERS command to the scanner.  Note that the X&Y resolution */
/* and the X width and Y length are specified on the command line. */

    WWidth = Xwid*(double)WXYRes;        /* X width inches to pixels */ 1
    WLength = Ylen*(double)WXYRes;       /* Y length inches to lines */
    WHdrSel = 0;                         /* Don't return header */
#ifdef NO_HEADER_FOR_NOW
    WHdrSel = 1;                         /* Return header w. data */
#endif

    WinPix = WWidth*WLength;             /* Pixels in window */ 2
    LineBytes = WWidth*3;          /* Full color, 8-bit pixels */
    TotalBytes = WHdrSel*256 + WinPix*3;  /* Full color, 8-bit pixels */

    printf("Window parameters:\n"); 3
    printf(" Width = %6d pixels/line, Length = %6d lines; Total = %10d pixels\n",
      WWidth, WLength, WinPix);
    printf(" Bytes/line = %6d; Total bytes/image = %10d\n", LineBytes,
      TotalBytes);

/* Fill in window parameters for scanner and send DEFINE WINDOW PARAMETERS */
/* command to the scanner. */

    clear_mem(&Window, sizeof(Window));       /* Clear whole DWP block */ 4
    swap_short_store(&Window.WDBLen[0], 0x2F); /* REQUIRED length */ 5
    swap_short_store(&Window.XRes[0], WXYRes); /* X and Y MUST BE THE SAME */
    swap_short_store(&Window.YRes[0], WXYRes); /* X and Y MUST BE THE SAME */
    /* Upper Left X & Y left at zero */
    swap_long_store(&Window.Width[0], WWidth);
    swap_long_store(&Window.Length[0], WLength);
    Window.ImgTyp = 5;                        /* Multi-level full color */ 6
    Window.PixBits = 8;                /* 8-bit pixels */ 7
    Window.PadTyp = 1;                        /* REQUIRED value */ 8
    Window.RevImg = 1;                        /* Reverse == 0,0,0 = black */ 9
    Window.HdrSel = WHdrSel;                  /* Set return header control */ 10
    /* All other values left at zero */

/* Display current contents of bytes in window parameter block */ 11

    printf("Window Parameter block (in hex):\n");
      for( i=0, bp=(u_char *)&Window; i < sizeof(Window); i++, bp++) {
          printf("%.2x ", *bp);
          if (i == 7) printf("\n");
          if (i == 8+21) printf("\n");
      }
    printf("\n\n" );
```

1 This section converts the X and Y values entered from the command line in inches into pixels. The value of `WXYRes` is an `int`; however, the values of `Xwid` and `Ylen` are floating point values. To perform the calculations to

determine the values of `WWidth`, the number of pixels per line, and `WLength`, the number of scan lines, the value of `WXYRes` must be converted to a `real` number. For example, if the value entered for `X` were 4.5 and the resolution selected were 300, `WWidth` would equal 1,350 pixels per line. If the value entered for `Y` were 3.5, the result would be 1,050 scan lines.

**2** This section of the program calculates the number of bytes in the scan window based on the total number of pixels. For example, the calculation using the previous figures would yield 1,417,500 pixels as the value of `WinPix`. To calculate the number of bytes per line, `WWidth` is multiplied by 3, which is the number of bytes per pixel. The total number of bytes in the scan window, using the figures in the example, would be 4,252,500 bytes.

**3** These lines display the results of the calculations.

**4** This line calls the `clear_mem` function to set the local WINDOW_PARAM_BLOCK structure, `Window`, to 0's (zeroes) in preparation for storing the byte values in swapped order. The WINDOW_PARAM_BLOCK structure was defined in Section 2.5.2.1. The `clear_mem` function is defined in Section 2.5.2.14.

**5** This section of code calls the functions that put the bytes of short and long integer values into big-endian storage. The functions are defined in Section 2.5.2.14.

**6** This line sets the image type for the scanner. The setting of 5 means multilevel, full color.

**7** This line sets the number of bits per pixel. The setting of 8 means 256 shades.

**8** This line sets the padding type for nonbyte pixels. The setting of 1 means pad with 0 (zero).

**9** This line sets the reverse image. The setting of 1 means white pixels are indicated by 1 (one) and black pixels are indicated by 0 (zero).

**10** This line sets the selection for returning a header with the data. The setting of `WHdrSel` was set to 0 (do not include the header).

**11** This section displays the contents of the bytes in the window parameter block.

### 2.5.2.10 CCB Setup for the DEFINE WINDOW Command

This section describes the portion of the User Agent sample scanner program where the fields of the CCB_HEADER needed for an XPT_SCSI_IO request are filled in.

```
/* Set up the CCB for an XPT_SCSI_IO request.  The DEFINE WINDOW
   PARAMETERS command will be sent to the device.  */

/* Set up the CAM header for the XPT_SCSI_IO function. */

    ccb.cam_ch.my_addr = (struct ccb_header *)&ccb; /* "Its" address */ 1
    ccb.cam_ch.cam_ccb_len = sizeof(CCB_SCSIIO);    /* a SCSI I/O CCB */
    ccb.cam_ch.cam_func_code = XPT_SCSI_IO;         /* the opcode */
    ccb.cam_ch.cam_path_id   = id;                    /* selected bus */
    ccb.cam_ch.cam_target_id = targid;       /* selected target */
    ccb.cam_ch.cam_target_lun = lun;                /* selected lun */

/* The needed CAM flags are: CAM_DIR_OUT - The data will go to the target. */

    ccb.cam_ch.cam_flags = CAM_DIR_OUT;
```

```
/* Set up the rest of the CCB for the DEFINE WINDOW PARAMETERS command. */

    ccb.cam_data_ptr = (u_char *)&Window;     /* where the parameters are */ 2
    ccb.cam_dxfer_len = sizeof(Window);   /* how much data */ 3
    ccb.cam_timeout = CAM_TIME_DEFAULT;   /* use the default timeout */ 4
    ccb.cam_cdb_len = sizeof(SCAN_DEF_WIN_CDB); /* how many bytes for cdb */ 5
    ccb.cam_sense_ptr = &sense[0];     /* Autosense data area */
    ccb.cam_sense_len = SENSE_LEN;     /* Autosense data length */

/* Use a local pointer to access the fields in the DEFINE WINDOW PARAMETERS
   CDB. */

    win = (SCAN_DEF_WIN_CDB *)&ccb.cam_cdb_io.cam_cdb_bytes[0]; 6

    clear_mem(win,sizeof(SCAN_DEF_WIN_CDB));  /* clear all bits in CDB */ 7
    win->opcode = SCAN_DEF_WIN_OP;            /* define window command */ 8
    win->lun = lun;                    /* lun on target */
    win->param_len0 = sizeof(Window);         /* for the buffer space */
    win->param_len1 = 0;
    win->param_len2 = 0;
    win->control    = 0;                      /* no control flags */

/* Set up the fields for the User Agent Ioctl call. */ 9

    ua_ccb.uagt_ccb = (CCB_HEADER *)&ccb;     /* where the CCB is */ 10
    ua_ccb.uagt_ccblen = sizeof(CCB_SCSIIO); /* how many bytes to gather */ 11
    ua_ccb.uagt_buffer = (u_char *)&Window;   /* where the parameters are */ 12
    ua_ccb.uagt_buflen = sizeof(Window);      /* how much data */ 13

    ua_ccb.uagt_snsbuf = &sense[0];           /* Autosense data area */ 14
    ua_ccb.uagt_snslen = SENSE_LEN;           /* Autosense data length */
    ua_ccb.uagt_cdb    = (CDB_UN *)NULL;      /* CDB is in the CCB */ 15
    ua_ccb.uagt_cdblen = 0;                   /* CDB is in the CCB */
```

1 This section of code fills in some of the CCB_HEADER fields of the SCSI I/O CCB structure defined as `ccb`, for processing by the XPT layer. The structure was declared in Section 2.5.2.5.

2 This line assigns the `cam_data_ptr` member of the local CCB_SCSIIO data structure, `ccb`, to the address of the `Window` parameter block. The `Window` parameter block structure was filled in Section 2.5.2.9.

3 This line sets the data transfer length to the length of the `Window` structure.

4 This line specifies using the default timeout, which is the value assigned to the CAM_TIME_DEFAULT constant. This constant is set in the `/usr/sys/h/cam.h` file to indicate that the SIM layer's default timeout is to be used. The current value of the SIM layer's default timeout is five seconds.

5 This line sets the length of the `cam_cdblen` member to the length of the SCAN_DEF_WIN_CDB structure.

6 This line assigns the `win` pointer, which is type SCAN_DEF_WIN_CDB, to the address of the `cam_cdb_bytes` member of the CDB_UN union. This union is defined in `/usr/sys/h/cam.h` as the `cam_cdb_io` member of the SCSI I/O CCB structure.

7 This line calls the `clear_mem` function to clear the local SCAN_DEF_WIN_CDB structure in preparation for storing the values needed for the DEFINE WINDOW operation. The SCAN_DEF_WIN_CDB structure was defined in Section 2.5.2.3. The `clear_mem` function is defined in Section 2.5.2.14.

8 These lines use the `win` pointer to access the bytes of the `cam_cdb_bytes` array as though it is a SCAN_DEF_WIN_CDB structure. The SCAN_DEF_WIN_CDB structure is defined in Section 2.5.2.3

9 This section of the code assigns the program address of the CCB into the CCB pointer member and the program address of the `Window` parameter block into the data pointer member of the `ua_ccb` structure of type UAGT_CAM_CCB, as defined in the `/usr/sys/h/uagt.h` file. This structure is copied from user space into kernel space as part of the `ioctl` system call that is executed in Section 2.5.2.11 This structure was declared in Section 2.5.2.3.

10 This line initializes the `uagt_ccb` member of the `ua_ccb` structure with the address of the local CCB_HEADER structure, `ccb.`

11 This line sets the length of the `uagt_ccblen` member to the length of the SCSI I/O CCB structure that will be used for this call.

12 This line initializes the `uagt_buffer` member with the user space address of the `Window` parameter block.

13 This line initializes the `uagt_buflen` member with the number of bytes in the `Window` parameter block.

14 These two lines reflect that the autosense features are turned on in the CAM flags.

15 These two lines reflect that the Command Descriptor Block information is in the SCSI I/O CCB structure filled in Section 2.5.2.5.

### 2.5.2.11 The Error Checking Section

This section describes the portion of the User Agent sample scanner program that attempts to set the window parameters and recover from possible scanner errors.

```
/* Send the CCB to the CAM subsystem using the User Agent driver.
   If an error occurs, report it and attempt corrective action. */

    retry_cnt = 10;                    /* initialize retry counter */
    reset_flag = 0;                    /* initialize reset flag */

retry_SWP:
    printf("Attempt to Set Window Parameters\n");
    if( ioctl(fd, UAGT_CAM_IO, (caddr_t)&ua_ccb) < 0 ) 1
    {
       perror("Error on CAM UAgt Ioctl to Define Window Parameters");
       close(fd);                              /* close the CAM file */
       exit(1);
    }

/* If the CCB did not complete successfully then report the error. */

    if (ccb.cam_ch.cam_status != CAM_REQ_CMP)
    {
       print_ccb_status("CAM UAgt Define Window Ioctl",
         &(ccb.cam_ch) );              /* report the error values */
       printf("  cam_scsi_status = 0x%.2X\n", ccb.cam_scsi_status); 2

/* 1st check if the SIM Queue is frozen.  If it is, release it. */

       if (ccb.cam_ch.cam_status & CAM_SIM_QFRZN) {
           printf("Attempt to release SIM Queue\n");
           if( ioctl(fd, UAGT_CAM_IO, (caddr_t)&ua_ccb_sim_rel) < 0 ) { 3
               perror("Error on CAM UAgt Release Sim Queue Ioctl");
               close(fd);               /* close the CAM file */
```

```
            exit(1);
        }

    /* If the Release Sim Q CCB did not complete successfully then
       report the error and exit. */

           print_ccb_status("CAM UAgt Release SIM Queue Ioctl",
            &(ccb_sim_rel.cam_ch) ); /* report the error values */

        if (ccb_sim_rel.cam_ch.cam_status != CAM_REQ_CMP) {
           print_ccb_status("CAM UAgt Release SIM Queue Ioctl",
            &(ccb_sim_rel.cam_ch) ); /* report the error values */ 4
            close(fd);              /* close the CAM file */
            exit(1);
        }
    }

/* Next, if we haven't done one yet, attempt a device reset to clear any
   device error. */

    if (reset_flag++ == 0)
    {
        printf("Attempt to Reset the scanner\n");
        if( ioctl(fd, UAGT_CAM_IO, (caddr_t)&ua_ccb_reset_dev) < 0 ) { 5
            perror("Error on CAM UAgt Device Reset Ioctl");
            close(fd);                    /* close the CAM file */
            exit(1);
        }

    /* If the Reset Device CCB did not complete successfully then
       report the error and exit. */

              print_ccb_status("CAM UAgt Device Reset Ioctl",
               &(ccb_reset_dev.cam_ch) );  /* report the error values */

            if (ccb_reset_dev.cam_ch.cam_status != CAM_REQ_CMP) { 6
               print_ccb_status("CAM UAgt Device Reset Ioctl",
                &(ccb_reset_dev.cam_ch) );  /* report the error values */
                close(fd);                 /* close the CAM file */
                exit(1);
            }

    /* Wait the 28 seconds that the scanner takes to come back to life
       after a reset; no use to do anything else. */

        printf("Scanner was reset, wait 28 Seconds for it to recover...\n");
        sleep(28);
    }

/* Last, count if all retries are used up.  If not, try the SWP again.  If so,
   give up and exit. */

    printf("Retry counter value = %d\n",retry_cnt);
    if (retry_cnt-- > 0) goto retry_SWP;

    close(fd);                            /* close the CAM file */
    exit(1);
  }
  else
  {

/* Output status information on success for debugging. */

   print_ccb_status("CAM UAgt SET WINDOW PARAMETERS Ioctl",
       &(ccb.cam_ch) );              /* report the error values */
```

```
    printf("  cam_scsi_status = 0x%.2X\n", ccb.cam_scsi_status);
    printf("\nWindow parameter set up successful\n");
    }

/* Output header information (magic number, informational comment, X and Y
   dimensions and maximum pixel values) to the data file and display it for
   the user. */

   sprintf(FileHead,"P6\n\# X&Y resolution = %d dpi, %d pixels/line, \
                                          %d lines", 7
      WXYRes,WWidth,WLength);
   sprintf(strchr(FileHead,NULL),"\n%d  %d  255\n",WWidth,WLength);
   write(od,FileHead,strlen(FileHead));
   printf("File header data --\n%s\n",FileHead);
```

1 This section of code attempts to set the window parameters. This line passes the local UAGT_CAM_CCB structure, `ua_ccb`, to the User Agent driver, using the `ioctl` system call. The arguments passed are the file descriptor returned by the `open` system call; the User Agent `ioctl` command, UAGT_CAM_IO, which is defined in the `/usr/sys/h/uagt.h` file; and the contents of the `ua_ccb` structure. The User Agent driver copies in the SCSI I/O CCB and sends it to the XPT layer. When the I/O completes, the User Agent returns to the application program, returning status within the `ua_ccb` structure.

2 If the CAM status is anything other than CAM_REQ_CMP, indicating the request completed, an error message is printed indicating the CAM status returned.

3 This section of code attempts to clear the SIM queue if it is frozen. This line passes the local UAGT_CAM_CCB structure, `ua_ccb_sim_rel`, to the User Agent driver, using the `ioctl` system call. The arguments passed are the file descriptor returned by the `open` system call; the User Agent `ioctl` command, UAGT_CAM_IO, which is defined in the `/usr/sys/h/uagt.h` file; and the contents of the `ua_ccb_sim_rel` structure. The User Agent driver copies in the SCSI I/O CCB and sends it to the XPT layer. When the operation completes, the User Agent returns to the application program, returning status within the `ua_ccb` structure.

4 If the CAM status is anything other than CAM_REQ_CMP, indicating the request completed, an error message is printed indicating the CAM status returned. An error message is displayed and the program exits.

5 This section of code attempts a device reset. This line passes the local UAGT_CAM_CCB structure, `ua_ccb_reset_dev`, to the User Agent driver, using the `ioctl` system call. The arguments passed are: the file descriptor returned by the `open` system call; the User Agent `ioctl` command, UAGT_CAM_IO, which is defined in the `/usr/sys/h/uagt.h` file; and the contents of the `ua_ccb_reset_dev` structure. The User Agent driver copies in the SCSI I/O CCB and sends it to the XPT layer. When the operation completes, the User Agent returns to the application program, returning status within the `ua_ccb` structure.

6 If the CAM status is anything other than CAM_REQ_CMP, indicating the request completed, an error message is printed indicating the CAM status returned. An error message is displayed and the program exits.

7 If the scan window parameters were set up successfully, a portable pixmap P6 file is created. This section displays the X and Y resolutions in dots per inch, pixels per line, and number of lines, taking the values that were generated from the code

in Section 2.5.2.9.

### 2.5.2.12 CCB Setup for the READ Command

This section describes the portion of the User Agent sample inquiry application program that sets up the CCBs for a READ command.

```
/* Set up the CCB for an XPT_SCSI_IO request.  The READ (data) command will be
   sent to the device.  */

/* Set up the CAM header for the XPT_SCSI_IO function. */

    ccb.cam_ch.my_addr = (struct ccb_header *)&ccb; /* "Its" address */ 1
    ccb.cam_ch.cam_ccb_len = sizeof(CCB_SCSIIO);    /* a SCSI I/O CCB */
    ccb.cam_ch.cam_func_code = XPT_SCSI_IO;         /* the opcode */
    ccb.cam_ch.cam_path_id   = id;                  /* selected bus */
    ccb.cam_ch.cam_target_id = targid;       /* selected target */
    ccb.cam_ch.cam_target_lun = lun;                /* selected lun */

/* The needed CAM flags are: CAM_DIR_IN - The data will come from the target. */

    ccb.cam_ch.cam_flags = CAM_DIR_IN;

/* Set up the rest of the CCB for the READ command. */

    ccb.cam_data_ptr = (u_char *)ReadData;    /* where the data goes */ 2
    ccb.cam_dxfer_len = LineBytes;            /* how much data */
    ccb.cam_timeout = 100;              /* use timeout of 100Sec */
    ccb.cam_cdb_len = sizeof( SCAN_READ_CDB ); /* how many bytes for read */ 3
    ccb.cam_sense_ptr = &sense[0];            /* Autosense data area */
    ccb.cam_sense_len = SENSE_LEN;            /* Autosense data length */

/* Use a local pointer to access the fields in the DEFINE WINDOW PARAMETERS
   CDB. */

    read = (SCAN_READ_CDB *)&ccb.cam_cdb_io.cam_cdb_bytes[0]; 4

    clear_mem(read,sizeof(SCAN_READ_CDB));    /* clear all bits in CDB */ 5
    read->opcode = SCAN_READ_OP;       /* define window command */
    read->lun = lun;                          /* lun on target */
    read->param_len0 = LineBytes&255;         /* for the buffer space */
    read->param_len1 = (LineBytes>>8)&255;
    read->param_len2 = (LineBytes>>16)&255;
    read->control    = 0;              /* no control flags */

/* Set up the fields for the User Agent Ioctl call. */

    ua_ccb.uagt_ccb = (CCB_HEADER *)&ccb;     /* where the CCB is */ 6
    ua_ccb.uagt_ccblen = sizeof(CCB_SCSIIO); /* how many bytes to pull in */ 7
    ua_ccb.uagt_buffer = ReadData;            /* where the data goes */ 8
    ua_ccb.uagt_buflen = LineBytes;           /* how much data */ 9

    ua_ccb.uagt_snsbuf = &sense[0];           /* Autosense data area */ 10
    ua_ccb.uagt_snslen = SENSE_LEN;           /* Autosense data length */
    ua_ccb.uagt_cdb    = (CDB_UN *)NULL;      /* CDB is in the CCB */ 11
    ua_ccb.uagt_cdblen = 0;                   /* CDB is in the CCB */

    n = TotalBytes + strlen(FileHead);
    printf("Total bytes in file  =    %12d.\n", n);

    printf("\nRead data from scanner and write to file\n");
```

1 This section of code fills in some of the CCB_HEADER fields of the SCSI I/O CCB structure defined as `ccb`, for processing by the XPT layer. The structure was declared in Section 2.5.2.5.

2 This line sets the `cam_data_ptr` to the address of the `ReadData` array defined in Section 2.5.2.5.

3 This line sets the data transfer length to the length of the SCAN_READ_CDB structure.

4 This line sets the `read` pointer, which is type SCAN_READ_CDB, to the address of the `cam_cdb_len` member of the CDB_UN union. This union is defined in `/usr/sys/h/cam.h` as the `cam_cdb_io` member of the SCSI I/O CCB structure.

5 This line calls the `clear_mem` function to clear the local SCAN_READ_CDB structure, `read`, in preparation for storing the values needed for the READ operation. The SCAN_READ_CDB structure was defined in Section 2.5.2.3. The `clear_mem` function is defined in Section 2.5.2.14.

6 These lines use the `read` pointer to access the bytes of the `cam_cdb_bytes` array as though they are in a SCAN_DEF_WIN_CDB structure. The SCAN_READ_CDB structure is defined in Section 2.5.2.3.

7 This line sets the length of the `uagt_ccblen` member to the length of the SCSI I/O CCB structure that will be used for this call.

8 This line sets the `uagt_buffer` member of the `ua_ccb` structure.

9 This line sets the size of the data buffer to the number of bytes contained in the buffer pointed to by the `cam_data_ptr` member of the `ccb` structure.

10 These two lines reflect that the autosense features are turned on in the CAM flags.

11 These two lines reflect that the Command Descriptor Block information is in the SCSI I/O CCB structure filled in Section 2.5.2.5.

### 2.5.2.13 The Read and Write Loop Section

This section describes the portion of the program where the data is read, reformatted, and placed in the output buffer.

```
/* ****************** Beginning of read/write loop ***************** */

  for (i=0; i<WLength; i++) {

    printf(" Read scanner line number %8d\r",i);
    fflush(stdout); 1

/* Send the CCB to the CAM subsystem via the User Agent driver,
   and report any errors. */

    if( ioctl(fd, UAGT_CAM_IO, (caddr_t)&ua_ccb) < 0 ) 2
    {
      perror("\nError on CAM UAgt Ioctl to Read data line");
      close(fd);                    /* close the CAM file */
      exit(1);
    }

/* If the CCB completed successfully then print out the data read,
   if not report the error. */

    if (ccb.cam_ch.cam_status != CAM_REQ_CMP)
```

```
    {
      printf("\n");
      print_ccb_status("CAM UAgt Read data line Ioctl",
        &(ccb.cam_ch) );                /* report the error values */
      printf("  cam_scsi_status = 0x%.2X\n", ccb.cam_scsi_status);
      close(fd);  /* close the CAM file */
      exit(1);
    }
    else
    {
#ifdef CUT_FOR_NOW
      printf(" Data line read successfully\n");
#endif

/* Re-format the data from blocks of R, G and B data to tuples
   of (R,G,B) data for the data file.  Set up pointers to the
   beginning of each of the blocks of the Red, the Green and the
   Blue data bytes and another pointer to the output buffer.
   Then loop, collecting one each of Red, Green and Blue,
   putting each into the output data buffer. */ [3]

      RDRp = ReadData;       /* Red bytes are first */
      RDGp = RDRp + WWidth;  /* Green bytes are next */
      RDBp = RDGp + WWidth;  /* Blue bytes are last */
      WDp  = WriteData;

      for (n = 0 ; n < WWidth; n++)
      {
        *WDp++ = *RDRp++;
        *WDp++ = *RDGp++;
        *WDp++ = *RDBp++;
      }

/* Now write the re-formatted data to the output file. */

      write(od,WriteData,LineBytes);  /* write data to file */
    }
} /* ****************** End of read/write loop ***************** */
      printf("\nSuccessful read and write to file\n");
      close(fd);  /* close the CAM file */
      close(od);  /* close the output file */
}
```

[1] This line calls the standard C I/O function, `fflush`, to force the scan line number to the user's display.

[2] This section of code attempts to read a scan line. This line passes the local UAGT_CAM_CCB structure, `ua_ccb`, to the User Agent driver, using the `ioctl` system call. The arguments passed are the file descriptor returned by the `open` system call; the User Agent `ioctl` command, UAGT_CAM_IO, which is defined in the `/usr/sys/h/uagt.h` file; and the contents of the `ua_ccb` structure. The User Agent driver copies in the SCSI I/O CCB and sends it to the XPT layer. When the I/O completes, the User Agent returns to the application program, returning status within the `ua_ccb` structure.

[3] The scan line read in contains all the red bytes, then all the green bytes, then all the blue bytes, in sequence. This section of code reformats the bytes into pixels for the output file by placing a red byte, then a green byte, then a blue byte together on the output file scan line.

### 2.5.2.14 The Local Function Definition Section

This section describes the portion of the User Agent sample scanner program that defines functions used within the program.

```
/* Local routines and data structure to report in text and Hex form the
returned CAM status. */
struct cam_statustable { 1
        u_char  cam_status;
        caddr_t status_msg;
} cam_statustable[] = {
    {   CAM_REQ_INPROG,         "CCB request is in progress"            },
    {   CAM_REQ_CMP ,           "CCB request completed w/out error" },
    {   CAM_REQ_ABORTED,        "CCB request aborted by the host"   },
    {   CAM_UA_ABORT,           "Unable to Abort CCB request"          },
    {   CAM_REQ_CMP_ERR,        "CCB request completed with an err" },
    {   CAM_BUSY,               "CAM subsystem is busy"                 },
    {   CAM_REQ_INVALID,        "CCB request is invalid"          },
    {   CAM_PATH_INVALID,       "Bus ID supplied is invalid"            },
    {   CAM_DEV_NOT_THERE,      "Device not installed/there"            },
    {   CAM_UA_TERMIO,          "Unable to Terminate I/O CCB req"    },
    {   CAM_SEL_TIMEOUT,        "Target selection timeout"              },
    {   CAM_CMD_TIMEOUT,        "Command timeout"                 },
    {   CAM_MSG_REJECT_REC,     "Reject received"                 },
    {   CAM_SCSI_BUS_RESET,     "Bus reset sent/received"         },
    {   CAM_UNCOR_PARITY,       "Parity error occured"                  },
    {   CAM_AUTOSENSE_FAIL,     "Request sense cmd fail"          },
    {   CAM_NO_HBA,             "No HBA detected Error"                 },
    {   CAM_DATA_RUN_ERR,       "Overrun/underrun error"          },
    {   CAM_UNEXP_BUSFREE,      "BUS free"                              },
    {   CAM_SEQUENCE_FAIL,      "Bus phase sequence failure"            },
    {   CAM_CCB_LEN_ERR,        "CCB length supplied is inadaquate"  },
    {   CAM_PROVIDE_FAIL,       "To provide requ. capability"          },
    {   CAM_BDR_SENT,           "A SCSI BDR msg was sent to target"  },
    {   CAM_REQ_TERMIO,         "CCB request terminated by the host" },
    {   CAM_LUN_INVALID,        "LUN supplied is invalid"         },
    {   CAM_TID_INVALID,        "Target ID supplied is invalid"   },
    {   CAM_FUNC_NOTAVAIL,      "Requested function is not available" },
    {   CAM_NO_NEXUS,           "Nexus is not established"        },
    {   CAM_IID_INVALID,        "The initiator ID is invalid"     },
    {   CAM_CDB_RECVD,          "The SCSI CDB has been received"      },
    {   CAM_SCSI_BUSY,          "SCSI bus busy"                           }
};
int cam_statusentrys = sizeof(cam_statustable) /
sizeof(cam_statustable[0]);
char * camstatus( cam_status )
register u_char cam_status;
{
        register struct cam_statustable *cst = cam_statustable;
        register entrys;
        for( entrys = 0; entrys < cam_statusentrys; cst++ ) {
                if( cst->cam_status == cam_status ) {
                        return( cst->status_msg );
                }
        }
        return( "Unknown CAM Status" );
}

void print_ccb_status(id_string,cp) 2
char *id_string;
CCB_HEADER *cp;
{
        register i;

        printf("Status from %s0,id_string);
```

```
        printf(" cam_status = 0x%.2X   (%s%s%s)0, cp->cam_status,
        ((cp->cam_status & CAM_AUTOSNS_VALID) ? "AutoSns Valid-" : "" ),
        ((cp->cam_status & CAM_SIM_QFRZN) ? "SIM Q Frozen-" : "" ),
        camstatus( cp->cam_status & CAM_STATUS_MASK ));

        if (cp->cam_status & CAM_AUTOSNS_VALID) {
                printf("AutoSense Data (in hex):0);
                for( i=0; i < SENSE_LEN; i++)
                        printf("%.2X ", sense[i]);
                printf("0 );
        }

        fflush(stdout);
}

void clear_mem(bp,n)            /* Clear n bytes of memory beginning at bp */ 3
u_char *bp;
int    n;
{
       register i;
       register u_char *ptr;
       for(i=0, ptr=bp; i<n; i++, ptr++) *ptr = 0;
}

void swap_short_store(bp,val) /* Store short into byte-reversed storage */ 4
u_char *bp;
u_short val;
{
       u_short temp;
       register u_char *ptr;
       ptr = bp;                        /* Copy pointer */
       *(bp++) = (u_char)(val>>8);      /* Store high byte first */
       *bp     = (u_char)val;           /* Then store low byte */
}

void swap_long_store(bp,val)    /* Store long into byte-reversed storage */ 5
u_char *bp;
u_long val;
{
       *(bp++) = (u_char)(val>>24);     /* Store high byte first */
       *(bp++) = (u_char)(val>>16);
       *(bp++) = (u_char)(val>>8);
       *bp     = (u_char)val;           /* Store low byte last */
}
```

1 This function is described in Section 2.5.1.9.

2 This function prints out the CCB status.

3 This function clears out all the bits in an area of memory, such as a structure or an array, to be sure all are set to 0 (zero) and that there is no extraneous data before executing a SCSI/CAM command.

4 This function puts the bytes of a short (16-bit) integer value into big-endian storage to conform with SCSI byte ordering.

5 This function puts the bytes of a long (32-bit) integer value into byte-reversed storage to conform with SCSI byte ordering.

# USCA Common Modules 3

This chapter describes the common data structures, macros, and routines provided by Digital for SCSI/CAM peripheral device driver writers. These data structures, macros, and routines are used by the generic SCSI/CAM peripheral device driver routines described in Chapter 4.

Using the common and generic routines helps ensure that your SCSI/CAM peripheral device drivers are consistent with the ULTRIX SCSI/CAM Architecture. See Chapter 11 if you plan to define your own SCSI/CAM peripheral device drivers. See Chapter 12 for information about the SCSI/CAM special I/O interface to process special SCSI I/O commands.

If a SCSI/CAM device driver writer needs to understand all members of a structure, the complete structure is shown and each member described. If a SCSI/CAM device driver writer needs to understand only specific members of a structure, those members are listed in a table, and only those members are described.

## 3.1 Common SCSI Device Driver Data Structures

This section describes the SCSI/CAM peripheral common data structures. The following data structures are described:

- PDRV_UNIT_ELEM, the Peripheral Device Unit Table
- PDRV_DEVICE, the Peripheral Device Structure
- DEV_DESC, the Device Descriptor Structure
- MODESEL_TBL, the Mode Select Table Structure
- DENSITY_TBL, the Density Table Structure
- PDRV_WS, the SCSI/CAM Peripheral Device Driver Working Set Structure

### 3.1.1 Peripheral Device Unit Table

The Peripheral Device Unit Table is an array of SCSI/CAM peripheral device unit elements. The size of the array is the maximum number of possible devices, which is determined by the maximum number of SCSI controllers allowed for the system. The structure is allocated statically and is defined as follows:

```
typedef struct pdrv_unit_elem {
        PDRV_DEVICE *pu_device; /* Pointer to peripheral device structure */
        u_short pu_opens;       /* Total number of opens against unit */
        u_short pu_config;      /* Indicates whether the device type */
                                /* configured at this address */
        u_char  pu_type;        /* Device type - byte 0 from inquiry data */
}    PDRV_UNIT_ELEM;
```

The pu_device field is filled in with a pointer to a CAM-allocated peripheral SCSI device (PDRV_DEVICE) structure when the first call to the ccmn_open_unit routine is issued for a SCSI device that exists.

### 3.1.2 Peripheral Device Structure

A SCSI/CAM peripheral device structure, PDRV_DEVICE, is allocated for each SCSI device that exists in the system. This structure contains the queue header structure for the SCSI/CAM peripheral device driver CCB request queue. It also contains the Inquiry data obtained from a GET DEVICE TYPE CCB. Table 3-1 lists the members of the PDRV_DEVICE structure that a SCSI/CAM peripheral device driver writer using the common routines provided by Digital may use. Chapter 11 shows the complete structure for those driver writers who are not using the common routines.

**Table 3-1: Members of the PDRV_DEVICE Structure**

| Member Name | Data Type | Description |
|---|---|---|
| pd_dev | dev_t | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. Passed to the common open routine. |
| pd_bus | u_char | SCSI target's bus controller number. |
| pd_target | u_char | SCSI target's ID number. |
| pd_lun | u_char | SCSI target's logical unit number. |
| pd_flags | u_long | May be used to indicate the state of a SCSI device driver. |
| pd_state | u_char | May be used for recovery. |
| pd_abort_cnt | u_char | May be used for recovery. |
| pd_dev_inq[INQLEN] | u_char | Inquiry data obtained from issuing a GET DEVICE TYPE CCB. |
| *pd_dev_desc | DEV_DESC | Pointer to the SCSI device descriptor. |
| pd_specific | caddr_t | Pointer to device-specific information. |
| pd_spec_size | u_long | Size of device-specific information structure. |
| *(pd_recov_hand)() | void | Recovery handler. |
| pd_lk_device | lock_t | SMP lock for the device. |

The pd_specifc field is filled in with a pointer to an allocated structure that contains device-specific information.

#### 3.1.2.1 The pd_dev Member

The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

#### 3.1.2.2 The pd_spec_size Member

The size, in bytes, of the device-specific information structure passed from the SCSI device driver to the common open routine.

### 3.1.3 Device Descriptor Structure

There is a `read-only` SCSI device descriptor structure, DEV_DESC, defined for each device supported by Digital. A user may supply a new DEV_DESC structure by adding it to `/usr/sys/data/cam_data.c` and relinking the kernel. The DEV_DESC structure follows:

```
typedef struct dev_desc {
        u_char  dd_pv_name[IDSTRING_SIZE];
                                /* Product ID and vendor string from */
                                /* Inquiry data */
        u_char  dd_length;      /* Length of dd_pv_name string */
        u_char  dd_dev_name[DEV_NAME_SIZE];
                                /* Device name string - see defines */
                                /* in devio.h */
        u_long  dd_device_type; /* Bits 0 - 23 contain the device */
                                /* class, bits 24-31 contain the */
                                /* SCSI device type */
        struct  pt_info *dd_def_partition;
                                /* Default partition sizes - disks */
        u_long  dd_block_size;  /* Block/sector size  */
        u_long  dd_max_record;  /* Maximun transfer size in bytes */
                                /* allowed for the device */
        DENSITY_TBL *dd_density_tbl;
                                /* Pointer to density table - tapes */
        MODESEL_TBL *dd_modesel_tbl;
                                /* Mode select table pointer - used */
                                /* on open and recovery */
        u_long  dd_flags;       /* Option flags (bbr, etc) */
        u_long  dd_scsi_optcmds;/* Optional commands supported */
        u_long  dd_ready_time;  /* Time in seconds for powerup dev ready */
        u_short dd_que_depth;   /* Device queue depth for devices */
                                /* which support command queueing */
        u_char  dd_valid;       /* Indicates which data length */
                                /* fields are valid */
        u_char  dd_inq_len;     /* Inquiry data length for device */
        u_char  dd_req_sense_len;
                                /* Request sense data length for */
                                /* this device */
}DEV_DESC;
```

### 3.1.4 Mode Select Table Structure

The Mode Select Table Structure is read and sent to the SCSI device when the first call to the SCSI/CAM peripheral open routine is issued on a SCSI device. There can be a maximum of eight entries in the Mode Select Table Structure. Chapter 11 contains a description of each structure member. The definition for the Mode Select Table Structure, MODESEL_TBL, follows:

```
typedef struct modesel_tbl {
        struct ms_entry{
           u_char  ms_page;     /* Page number */
           u_char  *ms_data;    /* Pointer to Mode Select data */
           u_char  ms_data_len; /* Mode Select data length */
           u_char  ms_ent_sp_pf;/* Save Page and Page format bits */
                                /* BIT 0   1=Save Page, */
                                /*         0=Don't Save Page */
```

```
                                    /* BIT 1  1=SCSI-2, 0=SCSI-1 */
     }ms_entry[MAX_OPEN_SELS];
}MODESEL_TBL;
```

### 3.1.5 Density Table Structure

The Density Table Structure allows for the definition of eight densities for each type of SCSI tape device unit. Chapter 11 contains a description of each structure member. The definition for the Density Table Structure, DENSITY_TBL, follows:

```
typedef struct density_tbl {
        struct density{
           u_char    den_flags;         /* VALID, ONE_FM etc */
           u_char    den_density_code;
           u_char    den_compress_code; /* Compression code if supported */
           u_char    den_speed_setting; /* for this density */
           u_char    den_buffered_setting;
                                        /* Buffer control setting */
           u_long    den_blocking;      /* 0 variable etc. */
        }density[MAX_TAPE_DENSITY];
}DENSITY_TBL;
```

#### 3.1.5.1 The den_blocking Member

The `den_blocking` member contains the blocking factor for this SCSI tape device. A NULL (0) setting specifies that the blocking factor is variable. A positive value represents the number of bytes in a block, for example, 512 or 1024.

### 3.1.6 SCSI/CAM Peripheral Device Driver Working Set Structure

The SCSI I/O CCB contains `cam_pdrv_ptr`, a pointer to the SCSI/CAM peripheral device driver working set area for the CCB. This structure is also allocated by the XPT when the `xpt_ccb_alloc` routine is called to allocate a CCB. The PDRV_WS structure follows:

```
typedef   struct      pdrv_ws  {
        struct pdrv_ws  *pws_flink;     /* Linkage of working set CCBs */
        struct pdrv_ws  *pws_blink;     /* that we have queued */
        CCB_SCSIIO      *pws_ccb;       /* Pointer to this CCB. */
        u_long          pws_flags;      /* Generic to driver */
        u_long          pws_retry_cnt;  /* Retry count for this request */
        u_char          *pws_pdrv;      /* Pointer to peripheral device */
                                        /* structure */
        u_char          pws_sense_buf[DEC_AUTO_SENSE_SIZE];
} PDRV_WS;
```

#### 3.1.6.1 The pws_flink Member

The `pws_flink` member of the `pdrv_ws` structure is a pointer to the forward link of the working set CCBs that have been queued.

#### 3.1.6.2 The pws_blink Member

The `pws_blink` member of the `pdrv_ws` structure is a pointer to the backward link of the working set CCBs that have been queued.

#### 3.1.6.3 The pws_ccb Member

The `pws_ccb` member is a pointer to this CCB. The CCB header is filled in by the common routines.

## 3.2 Common SCSI Device Driver Macros

The SCSI/CAM peripheral device driver common macros are supplied by Digital for SCSI device driver writers to use. These macros are defined in the `/usr/sys/h/pdrv.h` file. There are two categories of macros:

- Macros to obtain identification information about each SCSI device
- Locking macros

Table 3-2 lists each identification macro name, its call syntax, and a brief description of its purpose.

**Table 3-2: Common Identification Macros**

| Name | Syntax | Description |
|---|---|---|
| DEV_BUS_ID | `DEV_BUS_ID(dev)` | Returns the bus ID of the device that is identified in the major/minor device number pair. |
| DEV_TARGET | `DEV_TARGET(dev)` | Returns the target ID of the device that is identified in the major/minor device number pair. |
| DEV_LUN | `DEV_LUN(dev)` | Returns the target LUN of the device that is identified in the major/minor device number pair. |
| GET_PDRV_UNIT_ELEM | `GET_PDRV_UNIT_ELEM(dev)` | Returns the Peripheral Device Unit Table entry for the device that is identified in the major/minor device number pair. |
| GET_PDRV_PTR | `GET_PDRV_PTR(dev)` | Returns the pointer to the Peripheral Device Structure for the device that is identified in the major/minor device number pair. |

Table 3-3 lists each locking macro name, its call syntax, and a brief description of its purpose.

**Note**

Symmetric Multiprocessing (SMP) is not enabled in this release.

**Table 3-3: Common Lock Macros**

| Name | Syntax | Description |
|---|---|---|
| PDRV_INIT_LOCK | `PDRV_INIT_LOCK(pd)` | Initializes the Peripheral Device Structure lock. |
| PDRV_IPLSMP_LOCK | `PDRV_IPLSMP_LOCK(pd, lk_type, saveipl)` | Raises the IPL and locks the Peripheral Device Structure. |
| PDRV_IPLSMP_UNLOCK | `PDRV_IPLSMP_UNLOCK(pd, saveipl)` | Unlocks the Peripheral Device Structure and lowers the IPL. |
| PDRV_SMP_LOCK | `PDRV_SMP_LOCK(pd)` | Locks the Peripheral Device Structure. |
| PDRV_SMP_SLEEPUNLOCK | `PDRV_SMP_SLEEPUNLOCK(chan, pri, pd)` | Unlocks the Peripheral Device Structure. |

## 3.3 Common SCSI Device Driver Routines

The SCSI/CAM peripheral common device driver routines can be allocated into categories as follows:

- Initialization, open, and close routines, which handle the initialization of SCSI/CAM peripheral device drivers and the common open and close of the drivers. The following routines are in this category:
  - `ccmn_init`
  - `ccmn_open_unit`
  - `ccmn_close_unit`
- CCB queue manipulation routines, which manage placing and removing CCBs from the appropriate queues as well as aborting and terminating I/O for SCSI I/O CCBs on the queue's active list. The following routines are in this category:
  - `ccmn_send_ccb`
  - `ccmn_rem_ccb`
  - `ccmn_abort_que`
  - `ccmn_term_que`
- CCB allocation, build, and deallocation routines, which allocate CCBs, fill in the common portion of the CCB_HEADER, as well as create and send specific types of CCB requests to the XPT. The following routines are in this category:
  - `ccmn_get_ccb`
  - `ccmn_rel_ccb`
  - `ccmn_io_ccb_bld`

  - ccmn_gdev_ccb_bld
  - ccmn_sdev_ccb_bld
  - ccmn_sasy_ccb_bld
  - ccmn_rsq_ccb_bld
  - ccmn_pinq_ccb_bld
  - ccmn_abort_ccb_bld
  - ccmn_term_ccb_bld
  - ccmn_bdr_ccb_bld
  - ccmn_br_ccb_bld
- Common routines to build and send SCSI I/O commands, which are called during the open or recovery sequence of a device. The calling routine must sleep while the command completes, if necessary. The following routines are in this category:
  - ccmn_tur
  - ccmn_start_unit
  - ccmn_mode_select
- CCB status routine, which assigns CAM status values to a few general classifications. The following routine is in this category:
  - ccmn_ccb_status
- Buf structure pool allocation and deallocation routines, which allocate and deallocate `buf` structures from the buffer pool. The following routines are in this category:
  - ccmn_get_bp
  - ccmn_rel_bp
- Data buffer pool allocation and deallocation routines, which allocate and deallocate data buffer areas from the pool. The following routines are in this category:
  - ccmn_get_dbuf
  - ccmn_rel_dbuf
- Routines to perform miscellaneous operations. The following routines are in this category:
  - ccmn_ccbwait
  - ccmn_SysSpecialCmd
  - ccmn_DoSpecialCmd
  - ccmn_errlog

Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

### 3.3.1 Common I/O Routines

This section describes the common SCSI/CAM peripheral device driver initialization and I/O routines. Table 3-4 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 3-4: Common I/O Routines**

| Routine | Summary Description |
|---|---|
| `ccmn_init` | initializes the XPT and the unit table lock structure |
| `ccmn_open_unit` | handles the common open for all SCSI/CAM peripheral device drivers |
| `ccmn_close_unit` | handles the common close for all SCSI/CAM peripheral device drivers |

#### 3.3.1.1 The ccmn_init Routine

The `ccmn_init` routine initializes the XPT and the unit table lock structure. The first time the `ccmn_init` routine is called, it calls the `xpt_init` routine to request the XPT to initialize the CAM subsystem.

#### 3.3.1.2 The ccmn_open_unit Routine

The `ccmn_open_unit` routine handles the common open for all SCSI/CAM peripheral device drivers. It must be called for each open before any SCSI device-specific open code is executed.

On the first call to the `ccmn_open_unit` routine for a device, the `ccmn_gdev_ccb_bld` routine is called to issue a GET DEVICE TYPE CCB to obtain the Inquiry data. The `ccmn_open_unit` routine allocates the Peripheral Device Structure, PDRV_DEVICE, and a device-specific structure, either TAPE_SPECIFIC or DISK_SPECIFIC, based on the device size argument passed. The routine also searches the `cam_devdesc_tab` to obtain a pointer to the Device Descriptor Structure for the SCSI device and increments the open count. The statically allocated `pdrv_unit_table` structure contains a pointer to the PDRV_DEVICE structure. The PDRV_DEVICE structure contains pointers to the DEV_DESC structure and to the device-specific structure.

#### 3.3.1.3 The ccmn_close_unit Routine

The `ccmn_close_unit` routine handles the common close for all SCSI/CAM peripheral device drivers. It sets the open count to zero.

### 3.3.2 Common Queue Manipulation Routines

This section describes the common SCSI/CAM peripheral device driver queue manipulation routines. Table 3-5 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 3-5: Common Queue Manipulation Routines**

| Routine | Summary Description |
|---|---|
| `ccmn_send_ccb` | sends CCBs to the XPT layer by calling the `xpt_action` routine |
| `ccmn_rem_ccb` | removes a SCSI I/O CCB request from the SCSI/CAM peripheral driver active queue and starts a tagged request if a tagged CCB is pending |
| `ccmn_abort_que` | sends an ABORT CCB request for each SCSI I/O CCB on the active queue |
| `ccmn_term_que` | sends a TERMINATE I/O CCB request for each SCSI I/O CCB on the active queue |

#### 3.3.2.1 The ccmn_send_ccb Routine

The `ccmn_send_ccb` routine sends CCBs to the XPT layer by calling the `xpt_action` routine. This routine must be called with the Peripheral Device Structure locked.

For SCSI I/O CCBs that are not retries, the request is placed on the active queue. If the CCB is a tagged request and the tag queue size for the device has been reached, the request is placed on the tagged pending queue so that the request can be sent to the XPT at a later time. A high-water mark of half the queue depth for the SCSI device is used for tagged requests so that other initiators on the SCSI bus will not be blocked from using the device.

#### 3.3.2.2 The ccmn_rem_ccb Routine

The `ccmn_rem_ccb` routine removes a SCSI I/O CCB request from the SCSI/CAM peripheral driver active queue and starts a tagged request if a tagged CCB is pending. If a tagged CCB is pending, the `ccmn_rem_ccb` routine places the request on the active queue and calls the `xpt_action` routine to start the tagged request.

#### 3.3.2.3 The ccmn_abort_que Routine

The `ccmn_abort_que` routine sends an ABORT CCB request for each SCSI I/O CCB on the active queue. This routine must be called with the Peripheral Device Structure locked.

The `ccmn_abort_que` routine calls the `ccmn_abort_ccb_bld` routine to create an ABORT CCB for the first active CCB on the active queue and send it to the XPT. It calls the `ccmn_send_ccb` routine to send the ABORT CCB for each of the other CCBs on the active queue that are marked as active to the XPT. The `ccmn_abort_que` routine then calls the `ccmn_rel_ccb` routine to return the ABORT CCB to the XPT.

#### 3.3.2.4 The ccmn_term_que Routine

The `ccmn_term_que` routine sends a TERMINATE I/O CCB request for each SCSI I/O CCB on the active queue. This routine must be called with the Peripheral Device Structure locked.

The ccmn_term_que routine calls the ccmn_term_ccb_bld routine to create a TERMINATE I/O CCB for the first active CCB on the active queue and send it to the XPT. It calls the ccmn_send_ccb routine to send the TERMINATE I/O CCB for each of the other CCBs on the active queue that are marked as active to the XPT. The ccmn_term_que routine then calls the ccmn_rel_ccb routine to return the TERMINATE I/O CCB to the XPT.

### 3.3.3 Common CCB Management Routines

This section describes the common SCSI/CAM peripheral device driver CCB allocation, build, and deallocation routines. Table 3-6 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 3-6: Common CCB Management Routines**

| Routine | Summary Description |
|---|---|
| ccmn_get_ccb | allocates a CCB and fills in the common portion of the CCB header |
| ccmn_rel_ccb | releases a CCB and returns the sense data buffer for SCSI I/O CCBs, if allocated |
| ccmn_io_ccb_bld | allocates a SCSI I/O CCB and fills it in |
| ccmn_gdev_ccb_bld | creates a GET DEVICE TYPE CCB and sends it to the XPT |
| ccmn_sdev_ccb_bld | creates a SET DEVICE TYPE CCB and sends it to the XPT |
| ccmn_sasy_ccb_bld | creates a SET ASYNCHRONOUS CALLBACK CCB and sends it to the XPT |
| ccmn_rsq_ccb_bld | creates a RELEASE SIM QUEUE CCB and sends it to the XPT |
| ccmn_pinq_ccb_bld | creates a PATH INQUIRY CCB and sends it to the XPT |
| ccmn_abort_ccb_bld | creates an ABORT CCB and sends it to the XPT |
| ccmn_term_ccb_bld | creates a TERMINATE I/O CCB and sends it to the XPT |
| ccmn_bdr_ccb_bld | creates a BUS DEVICE RESET CCB and sends it to the XPT |
| ccmn_br_ccb_bld | creates a BUS RESET CCB and sends it to the XPT |

#### 3.3.3.1 The ccmn_get_ccb Routine

The ccmn_get_ccb routine allocates a CCB and fills in the common portion of the CCB header. The routine calls the xpt_ccb_alloc routine to allocate a CCB structure. The ccmn_get_ccb routine fills in the common portion of the CCB header and returns a pointer to that CCB_HEADER.

#### 3.3.3.2 The ccmn_rel_ccb Routine

The ccmn_rel_ccb routine releases a CCB and returns the sense data buffer for SCSI I/O CCBs, if allocated. The routine calls the xpt_ccb_free routine to release a CCB structure. For SCSI I/O CCBs, if the sense data length is greater than the default sense data length, the ccmn_rel_ccb routine calls the ccmn_rel_dbuf routine to return the sense data buffer to the data buffer pool.

#### 3.3.3.3 The ccmn_io_ccb_bld Routine

The `ccmn_io_ccb_bld` routine allocates a SCSI I/O CCB and fills it in. The routine calls the `ccmn_get_ccb` routine to obtain a CCB structure with the header portion filled in. The `ccmn_io_ccb_bld` routine fills in the SCSI I/O-specific fields from the parameters passed and checks the length of the sense data to see if it exceeds the length of the reserved sense buffer. If it does, a sense buffer is allocated using the `ccmn_get_dbuf` routine.

#### 3.3.3.4 The ccmn_gdev_ccb_bld Routine

The `ccmn_gdev_ccb_bld` routine creates a GET DEVICE TYPE CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The `ccmn_gdev_ccb_bld` routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.5 The ccmn_sdev_ccb_bld Routine

The `ccmn_sdev_ccb_bld` routine creates a SET DEVICE TYPE CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the device type field of the CCB and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.6 The ccmn_sasy_ccb_bld Routine

The `ccmn_sasy_ccb_bld` routine creates a SET ASYNCHRONOUS CALLBACK CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the asynchronous fields of the CCB and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.7 The ccmn_rsq_ccb_bld Routine

The `ccmn_rsq_ccb_bld` routine creates a RELEASE SIM QUEUE CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.8 The ccmn_pinq_ccb_bld Routine

The `ccmn_pinq_ccb_bld` routine creates a PATH INQUIRY CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.9 The ccmn_abort_ccb_bld Routine

The `ccmn_abort_ccb_bld` routine creates an ABORT CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the address of the CCB to be aborted and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.10 The ccmn_term_ccb_bld Routine

The `ccmn_term_ccb_bld` routine creates a TERMINATE I/O CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the CCB to be terminated and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.11 The ccmn_bdr_ccb_bld Routine

The `ccmn_bdr_ccb_bld` routine creates a BUS DEVICE RESET CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

#### 3.3.3.12 The ccmn_br_ccb_bld Routine

The `ccmn_br_ccb_bld` routine creates a BUS RESET CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

### 3.3.4 Common SCSI I/O Command Building Routines

This section describes the common SCSI/CAM peripheral device driver SCSI I/O command build and send routines. Table 3-7 lists the name of the routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 3-7: Common SCSI I/O Command Building Routines**

| Routine | Summary Description |
|---|---|
| `ccmn_tur` | creates a SCSI I/O CCB for the TEST UNIT READY command and sends it to the XPT for processing |
| `ccmn_start_unit` | creates a SCSI I/O CCB for the START UNIT command and sends it to the XPT for processing |
| `ccmn_mode_select` | creates a SCSI I/O CCB for the MODE SELECT command and sends it to the XPT for processing |

#### 3.3.4.1 The ccmn_tur Routine

The `ccmn_tur` routine creates a SCSI I/O CCB for the TEST UNIT READY command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete.

The `ccmn_tur` routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. The `ccmn_tur` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

#### 3.3.4.2 The ccmn_start_unit Routine

The `ccmn_start_unit` routine creates a SCSI I/O CCB for the START UNIT command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete.

The `ccmn_start_unit` routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. The `ccmn_start_unit` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

#### 3.3.4.3 The ccmn_mode_select Routine

The `ccmn_mode_select` routine creates a SCSI I/O CCB for the MODE SELECT command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete. The routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. It uses the *ms_index* parameter to index into the Mode Select Table pointed to by the `dd_modsel_tbl` member of the Device Descriptor Structure for the SCSI device. The `ccmn_mode_select` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

### 3.3.5 Common CCB Status Routine

This section describes the common SCSI/CAM peripheral device driver CCB status routine. The `ccmn_ccb_status` routine assigns individual CAM status values to generic categories. The following table shows the returned category for each CAM status value:

| CAM Status | Assigned Category |
|---|---|
| CAM_REQ_INPROG | CAT_INPROG |
| CAM_REQ_CMP | CAT_CMP |
| CAM_REQ_ABORTED | CAT_ABORT |
| CAM_UA_ABORT | CAT_ABORT |
| CAM_REQ_CMP_ERR | CAT_CMP_ERR |
| CAM_BUSY | CAT_BUSY |
| CAM_REQ_INVALID | CAT_CCB_ERR |
| CAM_PATH_INVALID | CAT_NO_DEVICE |
| CAM_DEV_NOT_THERE | CAT_NO_DEVICE |
| CAM_UA_TERMIO | CAT_ABORT |
| CAM_SEL_TIMEOUT | CAT_DEVICE_ERR |
| CAM_CMD_TIMEOUT | CAT_DEVICE_ERR |
| CAM_MSG_REJECT_REC | CAT_DEVICE_ERR |
| CAM_SCSI_BUS_RESET | CAT_RESET |
| CAM_UNCOR_PARITY | CAT_DEVICE_ERR |
| CAM_AUTOSENSE_FAIL | CAT_BAD_AUTO |
| CAM_NO_HBA | CAT_NO_DEVICE |

| CAM Status | Assigned Category |
|---|---|
| CAM_DATA_RUN_ERR | CAT_DEVICE_ERR |
| CAM_UNEXP_BUSFREE | CAT_DEVICE_ERR |
| CAM_SEQUENCE_FAIL | CAT_DEVICE_ERR |
| CAM_CCB_LEN_ERR | CAT_CCB_ERR |
| CAM_PROVIDE_FAIL | CAT_CCB_ERR |
| CAM_BDR_SENT | CAT_RESET |
| CAM_REQ_TERMIO | CAT_ABORT |
| CAM_LUN_INVALID | CAT_NO_DEVICE |
| CAM_TID_INVALID | CAT_NO_DEVICE |
| CAM_FUNC_NOTAVAIL | CAT_CCB_ERR |
| CAM_NO_NEXUS | CAT_NO_DEVICE |
| CAM_IID_INVALID | CAT_NO_DEVICE |
| CAM_SCSI_BUSY | CAT_SCSI_BUSY |
| Other | CAT_UNKNOWN |

### 3.3.6 Common Buf Structure Pool Management Routines

This section describes the common SCSI/CAM peripheral device driver `buf` structure pool allocation and deallocation routines.

#### 3.3.6.1 The ccmn_get_bp Routine

The `ccmn_get_bp` routine allocates a `buf` structure. This function must not be called at interrupt context. The function may sleep waiting for resources.

#### 3.3.6.2 The ccmn_rel_bp Routine

The `ccmn_rel_bp` routine deallocates a `buf` structure.

### 3.3.7 Common Data Buffer Pool Management Routines

This section describes the common SCSI/CAM peripheral device driver data buffer pool allocation and deallocation routines.

#### 3.3.7.1 The ccmn_get_dbuf Routine

The `ccmn_get_dbuf` routine allocates a data buffer area of the size specified by calling the kernel memory allocation routines .

#### 3.3.7.2 The ccmn_rel_dbuf Routine

The `ccmn_rel_dbuf` routine deallocates a data buffer.

### 3.3.8 Miscellaneous Common Routines

This section describes the common SCSI/CAM peripheral device driver routines that perform miscellaneous operations. Table 3-8 lists the name of each routine and gives a summary description of its function.

**Table 3-8: Miscellaneous Common Routines**

| Routine | Summary Description |
|---|---|
| `ccmn_ccbwait` | sleeps waiting for a SCSI I/O CCB request to complete |
| `ccmn_DoSpecialCmd` | provides a simplified interface to the special command routine |
| `ccmn_SysSpecialCmd` | lets a system request issue SCSI I/O commands to the SCSI/CAM special I/O interface |
| `ccmn_errlog` | reports error conditions for the SCSI/CAM peripheral device driver |

#### 3.3.8.1 The ccmn_ccbwait Routine

The `ccmn_ccbwait` routine sleeps waiting for a SCSI I/O CCB request to complete. If the priority is greater than PZERO, the `ccmn_ccbwait` routine sleeps at an interruptible priority in order to catch signals.

#### 3.3.8.2 The ccmn_DoSpecialCmd Routine

The `ccmn_DoSpecialCmd` routine provides a simplified interface to the special command routine. The routine prepares for and issues special commands.

#### 3.3.8.3 The ccmn_SysSpecialCmd Routine

The `ccmn_SysSpecialCmd` routine lets a system request issue SCSI I/O commands to the SCSI/CAM special I/O interface. This permits existing SCSI commands to be issued from within kernel code.

#### 3.3.8.4 The ccmn_errlog Routine

The `ccmn_errlog` routine reports error conditions for the SCSI/CAM peripheral device driver. The routine is passed a pointer to the name of the function in which the error was detected. The routine builds informational strings based on the error condition.

# USCA Generic Modules 4

This chapter describes the generic data structures and routines provided by Digital for SCSI/CAM peripheral device driver writers. The generic data structures and routines can be used as templates for SCSI/CAM peripheral device drivers to interface with the CAM subsystem to perform standard I/O operations. See Chapter 12 for a description of the SCSI/CAM special I/O interface, which processes special I/O control commands that are not issued to the device through the standard driver entry points.

The generic routines use the common SCSI/CAM peripheral device driver routines described in Chapter 3. Using the common and generic routines helps ensure that SCSI/CAM peripheral device drivers are consistent with the ULTRIX SCSI/CAM Architecture. See Chapter 11 if you plan to define your own SCSI/CAM peripheral device drivers.

## 4.1 Prerequisites for Using the CAM Generic Routines

The generic device driver routines use the common routines and data structures supplied by Digital. See Chapter 3 for information about how to use the common data structures and routines.

The following routines must be called with the Peripheral Device Structure locked:

- `ccmn_send_ccb`
- `ccmn_abort_que`
- `ccmn_term_que`

### 4.1.1 Ioctl Commands

The writer of a generic SCSI/CAM peripheral device driver has two options for implementing `ioctl` commands within the driver:

- Use the `ioctl` commands that are already defined in `/usr/sys/h/ioctl.h` and implement those that are appropriate for the type of device.
- Create new `ioctl` definitions by modifying the `/usr/sys/h/ioctl.h` file to reflect the new `ioctl` definitions and to implement the new `ioctl` commands within the driver. See the *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* for more information.

It is possible that conflicts with future releases of the operating system may result when new `ioctl` commands are implemented.

See Chapter 12 for information about the SCSI/CAM special I/O interface to handle SCSI special I/O commands.

### 4.1.2 Error Handling

The writer of the device driver is responsible for all error handling within the driver and for notifying the user process of the error.

### 4.1.3 Kernel Interface

The kernel entry points for any device driver are defined for both character and block devices in the structures `cdevsw` and `bdevsw` defined in the `/usr/sys/h/conf.h` file. The kernel entry points are implemented in the `cdevsw` and `bdevsw` switch tables in the `/usr/sys/machine/common/conf.c` file. If the device driver does not implement a specific kernel entry point, then the corresponding entries in the `cdevsw` and `bdevsw` switch tables must be null. See the *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* for more information.

## 4.2 Data Structures Used by Generic Routines

This section describes the generic data structures programmers adapt when they write their own SCSI/CAM peripheral device drivers. The following data structures are described:

- CGEN_SPECIFIC, the Generic-Specific Structure
- CGEN_ACTION, the Generic Action Structure

### 4.2.1 The Generic-Specific Structure

A SCSI/CAM peripheral device structure, CGEN_SPECIFIC, is defined for the device controlled by the driver. The CGEN_SPECIFIC structure is defined as follows:

```
typedef generic_specific struct {
        u_long  gen_flags;      /* flags - EOM, write locked */
        u_long  gen_state_flags;/* STATE - UNIT_ATTEN, RESET etc. */
        u_long  gen_resid;      /* Last operation residual count */
}CGEN_SPECIFIC;
```

#### 4.2.1.1 The gen_flags Member

The `gen_flags` member is used to indicate certain conditions of the SCSI unit. The possible flags are:

| Flag Name | Description |
|---|---|
| `CGEN_EOM` | The unit is positioned at the end of media. |
| `CGEN_OFFLINE` | The device is returning DEVICE NOT READY in response to a command. The media is either not loaded or is being loaded. |
| `CGEN_WRT_PROT` | The unit is either write protected or is opened read only. |
| `CGEN_SOFTERR` | A soft error has been reported by the SCSI unit. |

| Flag Name | Description |
|---|---|
| CGEN_HARDERR | A hard error has been reported by the SCSI unit. It can be reported either through an `ioctl` or by marking the `buf` structure as EIO. |

#### 4.2.1.2 The gen_state_flags Member

The `gen_state_flags` member is used to indicate certain states of the driver and of the SCSI unit. The possible flags are:

| Flag Name | Description |
|---|---|
| CGEN_NOT_READY_STATE | The unit was opened with the FNDELAY flag and the unit had a failure during the open, but was seen. |
| CGEN_UNIT_ATTEN_STATE | A check condition occurred and the sense key was UNIT ATTENTION. This usually indicates that a media change has occurred, but it could indicate power up or reset. Either way, current settings are lost. |
| CGEN_RESET_STATE | Indicates notification of a reset condition on the device or bus. |
| CGEN_RESET_PENDING_STATE | A reset is pending. |
| CGEN_OPENED_STATE | The unit is opened. |

#### 4.2.1.3 The gen_resid Member

The `gen_resid` member contains the residual byte count from the last operation.

### 4.2.2 The Generic Action Structure

The SCSI/CAM peripheral device structure, CGEN_ACTION, is passed to the generic driver's action routines to be filled in according to the success or failure of the command. The CGEN_ACTION structure is defined as follows:

```
typedef struct generic_action {
        CCB_SCSIIO      *act_ccb;       /* The CCB that is returned to caller */
        long            act_ret_error;      /* Error code if any */
        u_long          act_fatal;          /* Is this considered fatal? */
        u_long          act_ccb_status;     /* The CCB status code */
        u_long          act_scsi_status;    /* The SCSI error code */
        u_long          act_chkcond_error;  /* The check condition error */
}CGEN_ACTION;
```

#### 4.2.2.1 The act_ccb Member

The `act_ccb` member is a pointer to the SCSI I/O CCB returned to the calling routine.

#### 4.2.2.2 The act_ret_error Member

The `act_ret_error` contains the error code, if any, returned from the operation.

#### 4.2.2.3 The act_fatal Member

The `act_fatal` indicates whether an error returned was fatal. The possible flags are:

| Flag Name | Description |
|---|---|
| `ACT_FAILED` | The action has failed. |
| `ACT_RESOURCE` | Memory availability problem. |
| `ACT_PARAMETER` | An invalid parameter was passed. |
| `ACT_RETRY_EXCEDED` | The maximum retry count for the operation has been exceeded. |

#### 4.2.2.4 The act_ccb_status Member

The `act_ccb_status` member indicates the CAM generic category code for the CCB that was returned from the `ccmn_ccb_status` routine.

#### 4.2.2.5 The act_scsi_status Member

The `act_scsi_status` member indicates the SCSI status code if the CCB completed with an error status. The SCSI status codes are defined in the `/usr/sys/h/scsi_status.h` file.

#### 4.2.2.6 The act_chkcond_error Member

The `act_chkcond_error` member contains the check condition code returned from the `cgen_ccb_chkcond` routine, if the `cam_scsi_status` member of the SCSI I/O CCB is equal to SCSI_STAT_CHECK_CONDITION. The Check Condition codes are defined in the `/usr/sys/h/cam_generic.h` file.

## 4.3 Generic I/O Routines

The generic routines described in this section handle open, close, read, write, and other I/O requests from user processes. Table 4-1 lists the name of each routine and gives a short description of its function. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 4-1: Generic I/O Routines**

| Routine | Summary Description |
|---|---|
| `cgen_open` | called by the kernel when a user process requests an open of the device |
| `cgen_close` | closes the device |

**Table 4-1: (continued)**

| Routine | Summary Description |
|---|---|
| cgen_read | handles synchronous read requests for user processes |
| cgen_write | handles synchronous write requests for user processes |
| cgen_strategy | handles all I/O requests for user processes |
| cgen_ioctl | handles user process requests for specific actions other than read, write, open, or close for SCSI tape devices |

### 4.3.1 The cgen_open Routine

The cgen_open routine is called by the kernel when a user process requests an open of the device. The cgen_open routine calls the ccmn_open_unit routine, which manages the SMP_LOCKS and, if passed the exclusive use flag for SCSI devices, makes sure that no other process has opened the device. If the ccmn_open_unit routine returns success, the necessary data structures are allocated.

The cgen_open routine calls the ccmn_sasy_ccb_bld routine to register for asynchronous event notification for the device. The cgen_open routine then enters a for loop based on the power-up time specified in the Device Descriptor Structure for the device. Within the loop, calls are made to the cgen_ready routine, which calls the ccmn_tur routine to issue a TEST UNIT READY command to the device.

The cgen_open routine calls the ccmn_rel_ccb routine to release the CCB. The cgen_open routine checks certain state flags for the device to decide whether to send the initial SCSI mode select pages to the device. Depending on the setting of the state flags CGEN_UNIT_ATTEN_STATE and CGEN_RESET_STATE, the cgen_open routine calls the cgen_open_sel routine for each mode select page to be sent to the device. The cgen_open_sel routine fills out the Generic Action Structure based on the completion status of the CCB for each mode select page it sends.

### 4.3.2 The cgen_close Routine

The cgen_close routine closes the device. The routine checks any device flags that are defined to see if action is required, such as rewind on close or release the unit. The cgen_close closes the device by calling the ccmn_close_unit routine.

### 4.3.3 The cgen_read Routine

The cgen_read routine handles synchronous read requests for user processes. It passes the user process requests to the cgen_strategy routine. The cgen_read routine calls the ccmn_get_bp routine to allocate a buf structure for the user process read request. When the I/O is complete, the cgen_read routine calls the ccmn_rel_bp routine to deallocate the buf structure.

### 4.3.4 The cgen_write Routine

The `cgen_write` routine handles synchronous write requests for user processes. The routine passes the user process requests to the `cgen_strategy` routine. The `cgen_write` routine calls the `ccmn_get_bp` routine to allocate a `buf` structure for the user process write request. When the I/O is complete, the `cgen_write` routine calls the `ccmn_rel_bp` routine to deallocate the `buf` structure.

### 4.3.5 The cgen_strategy Routine

The `cgen_strategy` routine handles all I/O requests for user processes. It performs specific checks, depending on whether the request is synchronous or asynchronous and on the SCSI device type. The `cgen_strategy` routine calls the `ccmn_io_ccb_bld` routine to obtain an initialized SCSI I/O CCB and build either a read or a write command based on the information contained in the `buf` structure. The `cgen_strategy` routine then calls the `ccmn_send_ccb` to place the CCB on the active queue and send it to the XPT layer.

### 4.3.6 The cgen_ioctl Routine

The `cgen_ioctl` routine handles user process requests for specific actions other than read, write, open, or close for SCSI tape devices. The routine currently issues a DEVIOCGET `ioctl` command for the device, which fills out the `devget` structure passed in, and then calls the `cgen_mode_sns` routine which issues a SCSI_MODE_SENSE to the device to determine the device's state. The routine then calls the `ccmn_rel_ccb` routine to release the CCB. When the call to `cgen_mode_sns` completes, the `cgen_ioctl` routine fills out the rest of the `devget` structure based on information contained in the mode sense data.

## 4.4 Generic Internal Routines

The generic routines described in this section are examples that show one method of handling errors, events, and conditions. SCSI/CAM peripheral device driver writers must implement routines for handling errors, events, and conditions that are compatible with the design and the functionality of the specific device. Table 4-2 lists the name of each routine and gives a short description of its function. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 4-2: Generic Internal Routines**

| Routine | Summary Description |
|---|---|
| `cgen_ccb_chkcond` | decodes the autosense data for a device driver |
| `cgen_done` | the entry point for all nonread and nonwrite I/O callbacks |
| `cgen_iodone` | the entry point for all read and write I/O callbacks |
| `cgen_async` | handles notification of asynchronous events |
| `cgen_minphys` | compares the `b_bcount` with the maximum transfer limit for the device |
| `cgen_slave` | called at system boot to initialize the lower levels |
| `cgen_attach` | called for each bus, target, and LUN after the `cgen_slave` routine returns SUCCESS |

### 4.4.1 The cgen_ccb_chkcond Routine

The `cgen_ccb_chkcond` routine decodes the autosense data for a device driver and returns the appropriate status to the calling routine. The routine is called when a SCSI I/O CCB is returned with a CAM status of CAM_REQ_CMP_ERR (request completed with error) and a SCSI status of SCSI_STAT_CHECK_CONDITION. The routine also sets the appropriate flags in the Generic-Specific Structure.

### 4.4.2 The cgen_done Routine

The `cgen_done` routine is the the entry point for all nonread and nonwrite I/O callbacks. The generic device driver uses two callback entry points, one for all nonuser I/O requests and one for all user I/O requests. The SCSI/CAM peripheral device driver writer can declare multiple callback routines for each type of command and can fill the CCB with the address of the appropriate callback routine.

This is a generic routine for all nonread and nonwrite SCSI I/O CCBs. The SCSI I/O CCB should not contain a pointer to a `buf` structure in the `cam_req_map` member of the structure. If it does, then a wake-up call is issued on the address of the CCB and the error is reported. If the SCSI I/O CCB does not contain a pointer to a `buf` structure in the `cam_req_map` member, then a wake-up call is issued on the address of the CCB and the CCB is removed from the active queques. No CCB completion status is checked because that is the responsibility of the routine that created the CCB and is waiting for completion status. When this routine is entered, context is on the interrupt stack and the driver cannot sleep waiting for an event.

### 4.4.3 The cgen_iodone Routine

The `cgen_iodone` routine is the entry point for all read and write I/O callbacks. This is a generic routine for all read and write SCSI I/O CCBs. The SCSI I/O CCB should contain a pointer to a `buf` structure in the `cam_req_map` member of the structure. If it does not, then a wake-up call is issued on the address of the CCB and the error is reported. If the SCSI I/O CCB does contain a pointer to a `buf` structure in the `cam_req_map` member, as it should, then the completion status is decoded. Depending on the CCB's completion status, the correct fields within the `buf` structure are filled out.

The device's active queues may need to be aborted because of errors or because the device is a sequential access device and the transaction was an asynchronous request.

The CCB is removed from the active queques by a call to the `ccmn_rem_ccb` routine and is released back to the free CCB pool by a call to the `ccmn_rel_ccb` routine. When the `cgen_iodone` routine is entered, context is on the interrupt stack and the driver cannot sleep waiting for an event.

### 4.4.4 The cgen_async Routine

The `cgen_async` routine handles notification of asynchronous events. The routine is called when an Asynchronous Event Notification(AEN), Bus Device Reset (BDR), or Bus Reset (BR) occurs. The routine sets the CGEN_RESET_STATE flag and clears the CGEN_RESET_PEND_STATE flag for BDRs and bus resets. The routine sets the CGEN_UNIT_ATTEN_STATE flag for AENs.

### 4.4.5 The cgen_minphys Routine

The `cgen_minphys` routine compares the `b_bcount` with the maximum transfer limit for the device. The routine compares the `b_bcount` field in the `buf` structure with the maximum transfer limit for the device in the Device Descriptor Structure. The count is adjusted if it is greater than the limit.

### 4.4.6 The cgen_slave Routine

The `cgen_slave` routine is called at system boot to initialize the lower levels. The routine also checks the bounds for the unit number to ensure it is within the allowed range and sets the device-configured bit for the device at the specified bus, target, and LUN.

### 4.4.7 The cgen_attach Routine

The `cgen_attach` routine is called for each bus, target, and LUN after the `cgen_slave` routine returns SUCCESS. The routine calls the `ccmn_open_unit` routine, passing the bus, target, and LUN information.

The `cgen_attach` routine calls the `ccmn_close_unit` routine to close the device. If a device of the specified type is found, the device identification string is printed. See the *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* for more information.

## 4.5 Generic Command Support Routines

The generic routines described in this section are SCSI/CAM command support routines. Table 4-3 lists the name of each routine and gives a short description of its function. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 4-3: Generic Command Support Routines**

| Routine | Summary Description |
|---|---|
| `cgen_ready` | issues a TEST UNIT READY command to the unit defined |
| `cgen_open_sel` | issues a SCSI_MODE_SELECT command to the SCSI device |
| `cgen_mode_sns` | issues a SCSI_MODE_SENSE command to the unit defined |

### 4.5.1 The cgen_ready Routine

The `cgen_ready` routine issues a TEST UNIT READY command to the unit defined. The routine calls the `ccmn_tur` routine to issue the TEST UNIT READY command and sleeps waiting for command status.

### 4.5.2 The cgen_open_sel Routine

The `cgen_open_sel` routine issues a SCSI_MODE_SELECT command to the SCSI device. The mode select data sent to the device is based on the data contained in the Mode Select Table Structure for the device, if one is defined. The CGEN_ACTION structure is filled in for the calling routine based on the completion status of the CCB.

The `cgen_open_sel` routine calls the `ccmn_mode_select` routine to create a SCSI I/O CCB and send it to the XPT for processing.

### 4.5.3 The cgen_mode_sns Routine

The `cgen_mode_sns` routine issues a SCSI_MODE_SENSE command to the unit defined. The CGEN_ACTION structure is filled in for the calling routine based on the completion status of the CCB.

# CAM Data Structures 5

Data structures are the mechanism used to pass information between peripheral device drivers and the CAM subsystem. This chapter describes the CAM data structures used by peripheral device drivers.

Specifically, the chapter discusses the following:

- CAM Control Blocks (CCB)
- Input/Output (I/O) data structures
- Control CCB structures
- Configuration data structures

Other chapters reference these structures. You can read this chapter now to become familiar with the structures, or you can refer to it when you encounter references to the structures in other chapters.

## 5.1 CAM Control Blocks

The CAM Control Block (CCB) data structures let the device driver writer specify the action to be performed by the XPT and SIM. The CCBs are allocated by calling the `xpt_ccb_alloc` routine.

Table 5-1 contains the name of each CCB data structure and a brief description of its purpose.

**Table 5-1: CAM Control Blocks**

| CCB Name | Description |
|---|---|
| CCB_SCSIIO | Requests SCSI I/O |
| CCB_GETDEV | Gets device type |
| CCB_PATHINQ | Sends a path inquiry |
| CCB_RELSIM | Releases SIM queue |
| CCB_SETASYNC | Sets asynchronous callback |
| CCB_SETDEV | Sets device type |
| CCB_ABORT | Aborts XPT request |
| CCB_RESETBUS | Resets SCSI bus |
| CCB_RESETDEV | Resets SCSI device |
| CCB_TERMIO | Terminates I/O process request |

All CCBs contain a CCB_HEADER structure. Peripheral device driver writers need to understand the `CCB_HEADER` data structure, which is discussed in the section that follows.

### 5.1.1 The CCB_HEADER Structure

SCSI/CAM peripheral device driver writers allocate a CCB structure by calling the `xpt_ccb_alloc` routine. The CCB_HEADER structure is common to all CCBs and is the first structure filled in. It contains the following members:

```
typedef struct ccb_header
{
    struct ccb_header *my_addr; /* The address of this CCB */
    u_short cam_ccb_len;        /* Length of the entire CCB */
    u_char cam_func_code;       /* XPT function code */
    u_char cam_status;          /* Returned CAM subsystem */
                                /* status */
    u_char cam_path_id;         /* Path ID for the request */
    u_char cam_target_id;       /* Target device ID */
    u_char cam_target_lun;      /* Target LUN number */
    u_long cam_flags;           /* Flags for operation of */
                                /* the subsystem */
} CCB_HEADER;
```

#### 5.1.1.1 The my_addr and cam_ccb_len Members

The `my_addr` member is set to a pointer to the virtual address of the starting address of the CAM Control Block (CCB). It is automatically filled in by the `xpt_ccb_alloc` routine.

The `cam_ccb_len` member is set to the length in bytes of this specific CCB type. This field is filled in by the `ccmn_get_ccb` routine. The length includes the `my_addr` and `cam_ccb_len` members.

#### 5.1.1.2 The cam_func_code Member

The `cam_func_code` member lets device-driver writers specify the CCB type XPT/SIM functions. Device-driver writers can set this member to one of the function codes listed in Table 5-2.

**Table 5-2: CAM Function Codes**

| Function Code | Meaning |
|---|---|
| `XPT_NOOP` | Do not execute anything in the XPT/SIM. |
| `XPT_SCSI_IO` | Execute the requested SCSI I/O. Specify the details of the SCSI I/O by setting the appropriate members of the `CCB_SCSIIO` structure. |
| `XPT_GDEV_TYPE` | Get the device type information. Obtain this information by referencing the `CCB_GETDEV` structure. |
| `XPT_PATH_INQ` | Get the path inquiry information. Obtain this information by referencing the `CCB_PATHINQ` structure. |
| `XPT_REL_SIMQ` | Release the SIM queue that is frozen. |
| `XPT_ASYNC_CB` | Set the asynchronous callback parameters. Obtain asynchronous callback information from the `CCB_SETASYNC` structure. |
| `XPT_SDEV_TYPE` | Set the device type information. Obtain the device type information from the `CCB_SETDEV` structure. |

**Table 5-2: (continued)**

| Function Code | Meaning |
|---|---|
| XPT_ABORT | Abort the specified CCB. Specify the abort to the CCB by setting the appropriate member of the CCB_ABORT structure. |
| XPT_RESET_BUS | Reset the SCSI bus. |
| XPT_RESET_DEV | Reset the SCSI device. |
| XPT_TERM_IO | Terminate the I/O process. Specify the CCB process to terminate by setting the appropriate member of the CCB_TERMIO structure. |

#### 5.1.1.3 The cam_status Member

The cam_status member is the action or event that occurred during this CAM Control Block (CCB) request. The cam_status member is set by the XPT/SIM after the specified function completes. A CAM_REQ_INPROG status indicates that either the function is still executing or is still in the queue. The XPT/SIM can set this member to one of the CAM status codes listed in Table 5-3

**Table 5-3: CAM Status Codes**

| CAM Status Code | Meaning |
|---|---|
| CAM_REQ_INPROG | A CCB request is in progress. |
| CAM_REQ_CMP | A CCB request completed without errors. |
| CAM_REQ_ABORTED | A CCB request was aborted by the host processor. |
| CAM_REQ_UA_ABORT | The SIM was not able to abort the specified CCB. |
| CAM_REQ_CMP_ERR | The specified CCB request completed with an error. |
| CAM_BUSY | The CAM subsystem is busy. The CCB returns to the caller; the request must be resubmitted. |
| CAM_REQ_INVALID | The specified CCB request is not valid. |
| CAM_PATH_INVALID | The path ID specified in the cam_path_id member of the CCB_HEADER structure is not valid. |
| CAM_DEV_NOT_THERE | The specified SCSI device is not installed at this location. |
| CAM_UA_TERMIO | The CAM subsystem was unable to terminate the specified CCB I/O request. |
| CAM_SEL_TIMEOUT | A target-selection timeout occurred. |
| CAM_CMD_TIMEOUT | A command timeout occurred. |
| CAM_MSG_REJECT_REC | A message rejection was received by the SIM. |
| CAM_SCSI_BUS_RESET | The SCSI bus-reset was issued by the SIM or was seen on the bus by the SIM. |
| CAM_UNCOR_PARITY | An uncorrectable parity error occurred. |
| CAM_AUTOSENSE_FAIL | The autosense request-sense command failed. |
| CAM_NO_HBA | No HBA was detected. |

**Table 5-3: (continued)**

| CAM Status Code | Meaning |
|---|---|
| CAM_DATA_RUN_ERR | A data overflow or underflow error occurred. |
| CAM_UNEXP_BUSFREE | An unexpected bus free was detected. |
| CAM_SEQUENCE_FAIL | A target bus phase-sequence failure occurred. |
| CAM_CCB_LEN_ERR | The CCB length specified in the cam_ccb_len member of the CCB_HEADER structure is incorrect. |
| CAM_PROVIDE_FAIL | The requested capability could not be provided. |
| CAM_BDR_SENT | A SCSI BDR message was sent to the target. |
| CAM_REQ_TERMIO | The CCB request was terminated by the host. |
| CAM_SIM_QFRZN | The SIM queue is frozen. |
| CAM_AUTOSNS_VALID | Autosense data is valid for target. |

## 5.2 I/O Data Structure

Peripheral device drivers make SCSI device action requests through the following data structures:

- The CCB_SCSIIO structure
- The CDB_UN structure

### 5.2.1 The CCB_SCSIIO Structure

A peripheral driver indicates to the XPT/SIM that it wants to make a SCSI device action request by setting the cam_func_code member of the CCB_HEADER structure to the constant XPT_SCSI_IO. The peripheral-driver writer then uses the CCB_SCSIIO structure to specify the requests.

The CCB_SCSIIO structure contains the following members:

```
typedef struct
{
    CCB_HEADER cam_ch;    /* Header information fields */
    u_char *cam_pdrv_ptr; /* Ptr to the Peripheral driver */
                          /* working set */
    CCB_HEADER *cam_next_ccb;  /* Ptr to the next CCB for action */
    u_char *cam_req_map;  /* Ptr for mapping info on the Req. */
    void (*cam_cbfcnp)(); /* Callback on completion function */
    u_char *cam_data_ptr; /* Pointer to the data buf/SG list */
    u_long cam_dxfer_len; /* Data xfer length */
    u_char *cam_sense_ptr;  /* Pointer to the sense data buffer */
    u_char cam_sense_len; /* Num of bytes in the Autosense buf */
    u_char cam_cdb_len;   /* Number of bytes for the CDB */
    u_short cam_sglist_cnt;  /* Num of scatter/gather list entries */
    u_long cam_osd_rsvd0; /* OSD Reserved field, for alignment */
    long cam_resid;       /* Transfer residual length: 2's comp */
    CDB_UN cam_cdb_io;    /* Union for CDB bytes/pointer */
    u_long cam_timeout;   /* Timeout value */
    u_char *cam_msg_ptr;  /* Pointer to the message buffer */
    u_short cam_msgb_len; /* Num of bytes in the message buf */
    u_short cam_vu_flags; /* Vendor unique flags */
    u_char cam_tag_action;  /* What to do for tag queuing */
```

```
    u_char cam_iorsvd0[3];     /* Reserved field, for alignment */
    u_char cam_sim_priv[ SIM_PRIV ];     /* SIM private data area */
} CCB_SCSIIO;
```

### 5.2.2 The CDB_UN Structure

The CDB_UN structure contains:

```
typedef union
{
    u_char *cam_cdb_ptr;               /* Pointer to the CDB bytes to send */
    u_char cam_cdb_bytes[ IOCDBLEN ];   /* Area for the inline CDB to send */
} CDB_UN;
```

## 5.3 Control CCB Structures

The control CCB structures allow the driver writer to specify such tasks as resetting the SCSI bus, terminating an I/O process request, and so forth. This section discusses the following control structures:

- CCB_RELSIM
- CCB_SETASYNC
- CCB_ABORT
- CCB_RESETBUS
- CCB_RESETDEV
- CCB_TERMIO

These structures are discussed in the sections that follow.

### 5.3.1 The CCB_RELSIM Structure

Device-driver writers use the `CCB_RELSIM` structure to release the SIM's internal CCB queue. The CCB_RELSIM structure contains:

```
typedef struct
{
    CCB_HEADER cam_ch;           /* Header information fields */
} CCB_RELSIM;
```

### 5.3.2 The CCB_SETASYNC Structure

SCSI/CAM peripheral device driver writers use the CCB_SETASYNC structure to set the asynchronous callback for notification of the following events when they occur:

- Unsolicited SCSI BUS DEVICE RESET (BDR)
- Unsolicited RESELECTION
- SCSI AEN (asynchronous event notification enabled)
- Sent BDR to target
- SIM module loaded

- SIM module unloaded
- New devices found

The CCB_SETASYNC structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;              /* Header information fields */
    u_long cam_async_flags;         /* Event enables for Callback response */
    void (*cam_async_func)();       /* Async Callback function address */
    u_char *pdrv_buf;               /* Buffer set aside by the */
                                    /* peripheral driver */
    u_char pdrv_buf_len;            /* The size of the buffer */
} CCB_SETASYNC;
```

### 5.3.3 The CCB_ABORT Structure

Device-driver writers use the CCB_ABORT structure to abort a CCB that is on the SIM queue. The CCB_ABORT structure contains:

```
typedef struct
{
    CCB_HEADER cam_ch;              /* Header information fields */
    CCB_HEADER *cam_abort_ch;       /* Pointer to the CCB to abort */
} CCB_ABORT;
```

### 5.3.4 The CCB_RESETBUS Structure

Device-driver writers use the CCB_RESETBUS structure to reset the SCSI bus. The CCB_RESETBUS structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;      /* Header information fields */
} CCB_RESETBUS;
```

### 5.3.5 The CCB_RESETDEV Structure

Device-driver writers use the CCB_RESETDEV structure to reset a single SCSI device. The CCB_RESETDEV structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;      /* Header information fields */
} CCB_RESETDEV;
```

### 5.3.6 The CCB_TERMIO Structure

Device-driver writers use the CCB_TERMIO structure to terminate an I/O process request. The CCB_TERMIO structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;              /* Header information fields */
    CCB_HEADER *cam_termio_ch;      /* Pointer to the CCB to terminate */
} CCB_TERMIO;
```

## 5.4 Configuration CCB Structures

The configuration CCB structures let the driver writer obtain information such as the device type, version number for the SIM/HBA, and vendor IDS. The following configuration CCBs are described in this section:

- The CCB_GETDEV structure
- The CDB_SETDEV structure
- The CDB_PATHINQ structure

These structures are discussed in the following sections.

### 5.4.1 The CCB_GETDEV Structure

Device-driver writers use the CCB_GETDEV structure to obtain a device type and inquiry information. The CCB_GETDEV structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;         /* Header information fields */
    u_char cam_pd_type;        /* Peripheral device type from the TLUN */
    char *cam_inq_data;        /* Ptr to the inquiry data space */
} CCB_GETDEV;
```

### 5.4.2 The CCB_SETDEV Structure

Device-driver writers use the CCB_SETDEV structure to set the device type. The CCB_SETDEV structure is defined as follows:

```
typedef struct
{
    CCB_HEADER cam_ch;      /* Header information fields */
    u_char cam_dev_type;    /* Value for the dev type field in EDT */
} CCB_SETDEV;
```

### 5.4.3 The CCB_PATHINQ Structure

Device-driver writers use the CCB_PATHINQ structure to obtain SIM information such as supported features and version numbers. The CCB_PATHINQ structure is defined as follows:

```
typedef struct
{
   CCB_HEADER cam_ch;               /* Header information fields */
   u_char cam_version_num;          /* Version number for the SIM/HBA */
   u_char cam_hba_inquiry;          /* Mimic of INQ byte 7 for the HBA */
   u_char cam_target_sprt;          /* Flags for target mode support */
   u_char cam_hba_misc;             /* Misc HBA feature flags */
   u_char cam_vuhba_flags[ VUHBA ]; /* Vendor unique capabilities */
   u_long cam_sim_priv;             /* Size of SIM private data area */
   u_long cam_async_flags;          /* Event cap. for Async Callback */
   u_char cam_hpath_id;             /* Highest path ID in the subsystem */
   u_char cam_initiator_id;         /* ID of the HBA on the SCSI bus */
   char cam_sim_vid[ SIM_ID ];      /* Vendor ID of the SIM */
   char cam_hba_vid[ HBA_ID ];      /* Vendor ID of the HBA */
   u_char *cam_osd_usage;           /* Ptr for the OSD specific area */
} CCB_PATHINQ;
```

# SCSI/CAM Configuration Driver Modules 6

This chapter describes the data structures and routines used by the Configuration driver to interface with the CAM subsystem. It also describes the `/usr/sys/io/cam/cam_config.c` file, which contains SCSI/CAM peripheral device driver configuration information. SCSI/CAM peripheral device driver writers add to this file external declarations and entries to the SCSI/CAM peripheral driver configuration table for their peripheral device drivers.

## 6.1 Configuration Driver Introduction

The Configuration driver dynamically initializes the XPT and SIM layers of the CAM subsystem, at run time. This enables support for a generic kernel that is configured for all processors and all CAM subsystem software, for example, all HBA drivers. After initialization is complete, the Configuration driver scans the SCSI bus and stores INQUIRY information about each SCSI device detected.

Once the CAM subsystem is initialized and the scanning information stored, the SCSI/CAM peripheral device drivers can use the subsystem. They can determine what devices have been detected and allocate memory appropriately. They can also request resources from the XPT layer using the XPT_GDEV_TYPE and XPT_SDEV_TYPE get and set device information CCBs.

The Configuration driver module logically exists in the SCSI/CAM peripheral device driver layer above the XPT.

## 6.2 Configuration Driver XPT Interface

The Configuration driver is responsible for supporting the following XPT routines:

- GET DEVICE TYPE CCB
- SET DEVICE TYPE CCB
- SET ASYNCHRONOUS CALLBACK CCB

The Configuration driver also supports the configuration and bus scanning for loaded SIM modules.

## 6.3 Configuration Driver Data Structures

This section describes the following Configuration driver data structures:

- CCFG_CTRL – The Configuration driver control structure
- EDT – The CAM equipment device table
- CAM_PERIPHERAL_DRIVER – The SCSI/CAM peripheral driver configuration structure

### 6.3.1 The Configuration driver control structure

The Configuration driver control structure, CCFG_CTRL, contains flags used by the Configuration driver for the scanning process. It also sets aside an area to contain the data returned from the INQUIRY CCBs during the initial scanning process. The structure is defined as follows:

```
typedef struct ccfg_ctrl
{
    u_long ccfg_flags;          /* controlling flags */
    ALL_INQ_DATA inq_buf;       /* scratch area for the INQUIRY data */
    struct lock_t c_lk_ctrl;    /* for locking on the control struct */
} CCFG_CTRL;
```

#### 6.3.1.1 The ccfg_flags Member

The `ccfg_flags` member contains the flags used by the Configuration driver to control operations. The possible settings are as follows:

- EDT_INSCAN – Which signals that an EDT scan is in progress
- INQ_INPROG – Which indicates that an INQUIRY CCB is in progress

#### 6.3.1.2 The inq_buf Member

The `inq_buf` member sets aside a working or temporary area to hold the returned data described in the standard INQUIRY structure, ALL_INQ_DATA, which is defined in the file `/usr/sys/h/scsi_all.h`.

### 6.3.2 The CAM Equipment Device Table

The Configuration driver works with the XPT to allocate, initialize, and maintain the CAM equipment device table structure, EDT. An EDT structure is allocated for each SCSI bus. The structure is an 8x8-element array that contains device inquiry information, asynchronous callback flags, and a signal flag if a device was found, based on the number of targets and the number of LUNs on the SCSI bus. The structure is defined as follows:

```
typedef struct edt
{
    CAM_EDT_ENTRY edt[ NDPS ][ NLPT ];          /* a layer for targets/LUNs */
    u_long edt_flags;                           /* flags for EDT access */
    u_long edt_scan_count;                      /* # of XPT ASYNC CB readers */
    struct lock_t c_lk_edt                      /* for locking per bus */
} EDT;
```

#### 6.3.2.1 The edt Member

The `edt` member is a structure of the type CAM_EDT_ENTRY, which is defined in the `/usr/sys/h/cam.h` file. Each CAM_EDT_ENTRY structure is an entry in the CAM equipment device table containing the SCSI ID and LUN for each device on the SCSI bus. The array dimensions are the number of devices per SCSI bus (NDPS) and the number of LUNs per target (NLPT). The structure and constants are defined in the `/usr/sys/h/dec_cam.h` file.

#### 6.3.2.2 The edt_scan_count Member

The `edt_scan_count` member contains the number of processes reading the EDT structure.

#### 6.3.2.3 The edt_flags Member

The `edt_flags` member sets the flags for controlling access to the CAM equipment device table.

### 6.3.3 The SCSI/CAM Peripheral Driver Configuration Structure

CAM_PERIPHERAL_DRIVER, the SCSI/CAM peripheral driver configuration structure, contains the name of the device and defines the routines that are accessed as part of the system configuration process. The structure is defined as follows:

```
typedef struct cam_peripheral_driver
    {
    char        *cpd_name;
    int         (*cpd_slave)();
    int         (*cpd_attach)();
    int         (*cpd_unload)();
    } CAM_PERIPHERAL_DRIVER;
```

#### 6.3.3.1 The cpd_name Member

The `cpd_name` member is a pointer to the device name contained in the `ui_devname` member of the kernel data structure, `uba_device.` See the *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* for more information.

#### 6.3.3.2 The cpd_slave Member

The `cpd_slave` member is a function pointer to the SCSI/CAM peripheral device driver slave routine, which finds the device attached to the SCSI bus controller.

#### 6.3.3.3 The cpd_attach Member

The `cpd_attach` member is a function pointer to the SCSI/CAM peripheral device driver attach routine, which attaches the device to the controller and initializes the driver fields for the device.

#### 6.3.3.4 The cpd_unload Member

Not implemented.

## 6.4 The cam_config.c File

The Configuration driver file, `/usr/sys/io/cam/cam_config.c,` contains SCSI/CAM peripheral device driver configuraton information. SCSI/CAM peripheral device driver writers edit the file, as the superuser, to add `extern` declarations for their hardware devices and to add entries for the devices to the SCSI/CAM peripheral driver configuration table.

The section of the file where the `extern` declarations are added looks like the

following:

```
extern int crzslave(), crzattach();     /* Disk Driver */
extern int ctzslave(), ctzattach();     /* Tape Driver */
extern int cczslave(), cczattach();     /* CD-ROM Driver */

/* VENDOR: Add the extern declarations for your hardware following this
    comment line. */
```

A sample declaration for third-party SCSI/CAM peripheral device driver might be as follows:

```
extern int toastslave(), toastattach();     /* Non-tape or -disk Driver */
```

The section of the file where the SCSI/CAM peripheral driver configuration table entries are added looks like the following:

```
/*
 * CAM Peripheral Driver Configuration Table.
 */
struct cam_peripheral_driver cam_peripheral_drivers[] = {
        { "crz", crzslave, crzattach },
        { "ctz", ctzslave, ctzattach },
        { "ccz", cczslave, cczattach }

/* VENDOR: Add your hardware entries following this comment line. */
};
```

When you add your entry, be sure to place a comma (,) after the last member in the structure supplied by Digital. A sample entry for third-party hardware might be as follows:

```
        { "ccz", cczslave, cczattach },

/* VENDOR: Add your hardware entries following this comment line. */
        { "wheat", toastslave, toastattach}, /* Non-tape or -disk Driver */
};
```

## 6.5 Configuration Driver Entry Point Routines

The following Configuration driver routines are entry point routines that are accessible to the XPT and SIM modules as part of the Configuration driver interface. Table 6-1 lists the name of each routine and gives a short description of its function. The sections that follow contain a more detailed description of each routine. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 6-1: Configuration Driver Entry Point Routines**

| Routine | Summary Description |
|---|---|
| `ccfg_slave` | calls a SCSI/CAM peripheral driver's slave routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found |
| `ccfg_attach` | calls a SCSI/CAM peripheral driver's attach routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found |

**Table 6-1: (continued)**

| Routine | Summary Description |
|---|---|
| ccfg_action | calls the internal routines that handle any CCB that accesses the CAM equipment device table structure |
| ccfg_edtscan | issues SCSI INQUIRY commands to all possible SCSI targets and LUNs attached to the buses |

### 6.5.1 The ccfg_slave Routine

The ccfg_slave routine calls a SCSI/CAM peripheral driver's slave routine after a match on the cpd_name member of the CAM_PERIPHERAL_DRIVER structure is found. The routine is called during autoconfiguration. The ccfg_slave routine locates the configured driver in the SCSI/CAM peripheral driver configuration table. If the driver is located successfully, the SCSI/CAM peripheral driver's slave routine is called with a pointer to the unit information structure for the device from the kernel uba_device structure and the virtual address of its control and status register (CSR). The SCSI/CAM peripheral driver's slave routine performs its own slave initialization.

### 6.5.2 The ccfg_attach Routine

The ccfg_attach routine calls a SCSI/CAM peripheral driver's attach routine after a match on the cpd_name member of the CAM_PERIPHERAL_DRIVER structure is found. The routine is called during autoconfiguration. The ccfg_attach routine locates the configured driver in the SCSI/CAM peripheral driver configuration table. If the driver is located successfully, the SCSI/CAM peripheral driver's attach routine is called with a pointer to the unit information structure for the device from the kernel uba_device structure. The SCSI/CAM peripheral driver's attach routine performs its own attach initialization.

### 6.5.3 The ccfg_action Routine

The ccfg_action routine calls the internal routines that handle any CCB that accesses the CAM equipment device table structure. The CAM function codes supported are XPT_GDEV_TYPE, XPT_SASYNC_CB, and XPT_SDEV_TYPE.

### 6.5.4 The ccfg_edtscan Routine

The ccfg_edtscan routine issues SCSI INQUIRY commands to all possible SCSI targets and LUNs attached to the buses. The routine uses the CAM subsystem in the normal manner by sending SCSI I/O CCBs to the SIMs. The INQUIRY data returned is stored in the EDT structures and the cam_tlun_found flag is set. This routine can be called by the SCSI/CAM peripheral device drivers to reissue a full, partial, or single bus scan command.

# CAM XPT I/O Support Routines 7

This chapter contains descriptions of the Transport (XPT) layer routines used by SCSI/CAM device driver writers. Table 7-1 contains a list of the routines with a short description of each. Following the table is a description of each routine. Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

**Table 7-1: XPT I/O Support Routines**

| Routine | Summary Description |
|---|---|
| `xpt_action` | calls the appropriate XPT/SIM routine |
| `xpt_ccb_alloc` | allocates a CAM Control Block (CCB) |
| `xpt_ccb_free` | frees a previously allocated CCB |
| `xpt_init` | validates the initialized state of the CAM subsystem |

## 7.1 The xpt_action Routine

The `xpt_action` routine calls the appropriate XPT/SIM routine. The routine routes the specified CCB to the appropriate SIM module or to the Configuration driver, depending on the CCB type and on the path ID specified in the CCB. Vendor-unique CCBs are also supported. Those CCBs are passed to the appropriate SIM module according to the path ID specified in the CCB.

## 7.2 The xpt_ccb_alloc Routine

The `xpt_ccb_alloc` routine allocates a CAM Control Block (CCB) for use by a SCSI/CAM peripheral device driver. The `xpt_ccb_alloc` routine returns a pointer to a preallocated data buffer large enough to contain any CCB structure. The peripheral device driver uses this structure for its XPT/SIM requests. The routine also ensures that the SIM private data space and peripheral device driver pointer, `cam_pdrv_ptr`, are set up.

## 7.3 The xpt_ccb_free Routine

The `xpt_ccb_free` routine frees a previously allocated CCB. The routine returns a CCB, previously allocated by a peripheral device driver, to the CCB pool.

## 7.4 The xpt_init Routine

The `xpt_init` routine validates the initialized state of the CAM subsystem. The routine initializes all global and internal variables used by the CAM subsystem through a call to the Configuration driver. Peripheral device drivers must call this routine either during or prior to their own initialization. The `xpt_init` routine simply returns to the calling SCSI/CAM peripheral device driver if the CAM subsystem was previously initialized.

# CAM SIM Modules 8

This chapter describes how the SIM layers handle asynchronous callbacks. It also describes the following SIM routines:

- `sim_action`
- `sim_init`

Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

## 8.1 SIM Asynchronous Callback Handling

This section describes how the SIM layers handle asynchronous callbacks from the XPT to SCSI/CAM peripheral device drivers when an event such as a SCSI Bus Device Reset (BDR) or an Asynchronous Event Notification (AEN) occurs.

Each SCSI/CAM peripheral device driver registers an asynchronous callback function for each active SCSI device during driver initialization. The SCSI/CAM peripheral device drivers use the `ccmn_sasy_ccb_bld` routine to create a SET ASYNCHRONOUS CALLBACK CCB and send it to the XPT.

The `async_flags` field of the CCB are set to `1` for those events of which the SCSI/CAM peripheral device driver wants to be notified using the asynchronous callback function. The possible `async_flags` settings are:

| Flag Name | Description |
|---|---|
| `AC_FOUND_DEVICES` | A new device was found during a rescan. |
| `AC_SIM_DEREGISTER` | A previously loaded SIM driver has deregistered. |
| `AC_SIM_REGISTER` | A loaded SIM driver has registered. |
| `AC_SENT_BDR` | A bus device reset (BDR) message was sent to the target. |
| `AC_SCSI_AEN` | A SCSI Asynchronous Event Notification has been received. |
| `AC_UNSOL_RESEL` | An unsolicited reselection of the system by a device on the bus has occurred. |
| `AC_BUS_RESET` | A SCSI bus RESET occurred. |

## 8.2 SIM Routines Used by Device Driver Writers

This section describes the SIM routines device driver writers need to understand.

### 8.2.1 The sim_action Routine

The `sim_action` routine initiates an I/O request from a SCSI/CAM peripheral device driver. The routine is used by the XPT for immediate as well as for queued operations. When the operation completes, the SIM calls back directly to the peripheral driver using the CCB callback address, if callbacks are enabled and the operation is not to be carried out immediately.

The SIM determines whether an operation is to be carried out immediately or to be queued according to the function code of the CCB structure. All queued operations, such as ''Execute SCSI I/O'' (reads or writes), are placed by the SIM on a nexus-specific queue and return with a CAM status of CAM_INPROG.

Some immediate operations, as described in the American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186, may not be executed immediately. However, all CCBs to be carried out immediately return to the XPT layer immediately. For example, the ABORT CCB command does not always complete synchronously with its call; however, the CCB_ABORT is returned to the XPT immediately. An XPT_RESET_BUS CCB returns to the XPT following the reset of the bus.

### 8.2.2 The sim_init Routine

The `sim_init` routine initializes the SIM. The SIM clears all its queues and releases all allocated resources in response to this call. This routine is called using the function address contained in the CAM_SIM_ENTRY structure. This routine can be called at any time; the SIM layer must ensure that data integrity is maintained.

# USCA Error Handling 9

This chapter describes the error-logging macros, data structures, and routines provided by Digital for SCSI/CAM peripheral device driver writers.

## 9.1 CAM Error Handling Macro

Digital supplies an error-logging macro, CAM_ERROR, with the USCA software. SCSI device driver writers can activate the macro by defining the constant CAMERRLOG. Errors are reported using the same error-logging interface to each of the modules within the CAM subsystem.

The macro is defined in the `/usr/sys/io/cam/cam_errlog.h` file as follows:.

```
#if defined(CAMERRLOG) && !defined(lint)
#   define CAM_ERROR( FUNC, MSGSTR, EFLAGS, ARG4, ARG5, ARG6) \
    { \
        /* VARARGS */ \
        (void)(*local_errlog)( FUNC, MSGSTR, EFLAGS, ARG4, ARG5, ARG6 ); \
    }
#else /*  CAMERRLOG and not lint */
#   define CAM_ERROR( FUNC, MSGSTR, EFLAGS, ARG4, ARG5, ARG6 ) \
    { \
        /* VARARGS */
        printf( "%s: %s\n", \
            (((FUNC)   != (char *)NULL) ? (FUNC)   : "CAM Subsystem" ), \
            (((MSGSTR) != (char *)NULL) ? (MSGSTR) : "Unknown Error" ));\
    }
#endif /* CAMERRLOG and not lint */
#endif /* _CAM_ERRLOG_ */
```

The arguments to the macro contain different types of information. The first two arguments to the macro are strings containing the function name and the message string that is sent to the error logger from the function. If the CAMERRLOG macro is undefined, the message string is reported to the console. The third argument contains error flags for the local error handler. The remaining arguments are local parameters defined by the writer of the error-logging routine.

The CAM_ERROR macro presents a consistant error-logging interface to the modules within the CAM subsystem. Using the macro lets all the routines within each module that need to report and log error information use the same macro call and arguments. Using this macro also keeps each reported error string with the code within the module that originally reported the error.

Individual modules contain their own module-specific error-logging routines. Each source file contains a declaration of the pointer to the local error-logging routine as

follows:

```
static void (*local_errorlog)();
```

The macro calls the local error-logging routine through the local pointer. The pointer is loaded with the local error-handler address, either within the initiailization code for that module or as part of the initialized data. The following example shows the address of the `sx_errorlog` function being loaded to the local error-logging variable, `local_errlog`:

```
extern void sx_errorlog();
static void (*local_errlog)() = sx_errorlog;
```

SCSI/CAM peripheral common modules can declare the local pointer to contain the error handler from another SCSI/CAM peripheral common module.

## 9.2 CAM Error Logging Structures

This section describes the following CAM error-logging data structures:

- CAM_ERR_ENTRY, the Error Entry Structure
- CAM_ERR_HDR, the Error Header Structure

The structures are defined in the `/usr/sys/h/cam_logger.h` file.

### 9.2.1 The Error Entry Structure

The Error Entry Structure, CAM_ERR_ENTRY, describes an entry in the error log packet. There can be multiple entries in an error log packet. The structure is defined as follows:

```
typedef struct cam_err_entry {
    u_long ent_type;       /* String, TAPE_SPECIFIC, CCB, etc */
    u_long ent_size;       /* Size of the data (CCB, TAPE_SPEC)*/
    u_long ent_total_size; /* To preserve alignment (uerf) */
    u_long ent_vers;       /* Version number of type  */
    u_char *ent_data;      /* Pointer to whatever string, etc */
    u_long ent_pri;        /* FULL or Brief uerf output */
}CAM_ERR_ENTRY;
```

#### 9.2.1.1 The ent_type Member

The `ent_type` member contains the type of data in the entry, which can be a string, a structure, or a CCB. Numerous types of strings are defined in the `/usr/sys/h/cam_logger.h` file. CCBs are assigned to one of the XPT function codes listed in the `/usr/sys/h/cam.h` file.

#### 9.2.1.2 The ent_size Member

The `ent_size` member contains the size, in bytes, of the data in the entry.

#### 9.2.1.3 The ent_total_size Member

The `ent_total_size` member preserves long-word alignment for compatibility with the `uerf` error-reporting utility. The `cam_logger` routine fills in this member. See the *Guide to the Error Logger* for information about the `uerf` utility.

#### 9.2.1.4 The ent_vers Member

The `ent_vers` member is the version number of the contents of the `ent_type` member. See the `#define PDRV_DEVICE_VERS` line in the `/usr/sys/h/pdrv.h` file for an example of associating a version number with a structure.

#### 9.2.1.5 The ent_data Member

The `ent_data` member contains a pointer to the contents of the `ent_type` member.

#### 9.2.1.6 The ent_pri Member

The `ent_pri` member contains the output from the `uerf` utility, which can be in brief or full report format. See the *Guide to the Error Logger* for information about the `uerf` utility.

### 9.2.2 The Error Header Structure

The Error Header Structure, CAM_ERR_HDR, contains all the data needed by the `uerf` utility to determine that the packet is a CAM error log packet. See the *Guide to the Error Logger* for information about the `uerf` utility. The structure is defined as follows:

```
typedef struct cam_err_hdr {
    u_short hdr_type;       /* Packet type - CAM_ERR_PKT */
    u_long  hdr_size;       /* Filled in by cam_logger */
    u_char  hdr_class;      /* Sub system class Tape, disk,
                                        * sii_dme , etc..
                                        */
    u_long  hdr_subsystem;  /*
                                        * Mostly for controller type
                                        * But the current errloger uses
                                        * disk tape etc if no controller
                                        * is known.. So what we will do
                                        * is dup the disk and tape types
                                        * in the lower number 0 - 1f and
                                        * the controllers asc sii 5380
                                        * etc can use the uppers.
                                        */
    u_long  hdr_entries;    /* Number of error entries in list*/
    CAM_ERR_ENTRY *hdr_list;      /* Pointer to list of error entries*/
    u_long  hdr_pri;        /* Error logger priority.  */
}CAM_ERR_HDR;
```

#### 9.2.2.1 The hdr_type Member

The `hdr_type` member contains the error-packet type, which must be CAM_ERR_PKT.

#### 9.2.2.2 The hdr_size Member

The `hdr_size` member is filled in by the `cam_logger` routine.

#### 9.2.2.3 The hdr_class Member

The `hdr_class` member identifies the CAM module that detected the error and assigns it to one of the Defined Device Types listed in the `/usr/sys/h/scsi_all.h` file. The device classes are defined in the `/usr/sys/h/cam_logger.h` file.

#### 9.2.2.4 The hdr_subsystem Member

The `hdr_subsystem` member identifies the CAM subsystem controller that detected the error and assigns it to one of the Defined Device Types listed in the `/usr/sys/h/scsi_all.h` file. The device classes are defined in the `/usr/sys/h/cam_logger.h` file.

#### 9.2.2.5 The hdr_entries Member

The `hdr_entries` member contains the number of entries in the header list.

#### 9.2.2.6 The hdr_list Member

The `hdr_list` member contains a pointer to a list of error entries.

#### 9.2.2.7 The hdr_pri Member

The `hdr_pri` member identifies the priority of the error and assigns it to one of the priorities listed in the `/usr/sys/io/cam/errlog.h` file.

## 9.3 The cam_logger Routine

The `cam_logger` routine allocates a system error log buffer and fills in a `uerf` error log packet. The routine fills in the bus, target, and LUN information from the Error Header Structure passed to it and copies the Error Header Structure and the Error Entry Structures and data to the error log buffer.

# USCA Debugging Facilities 10

This chapter describes the debugging macros and routines provided by Digital for SCSI/CAM peripheral device driver writers.

## 10.1 CAM Debugging Variables

There are two levels of debugging within the CAM modules: debugging independent of a bus, target, or LUN, and debugging that tracks a specific bus, target, or LUN. USCA debugging is turned on by defining the program constant CAMDEBUG in the `/usr/sys/io/cam/cam_debug.h` file and recompiling the source files.

This section describes the variables that contain the information for each level of debugging the CAM subsystem. The variables are:

- `camdbg_flag` – Which turns on specific `cprintf` calls within the kernel, depending on its setting, to capture information independent of a particular SCSI ID.
- `camdbg_id` – Which contains the specific bus, target, and LUN information for tracking.

The macros, PRINTD and CALLD, use the variables for tracking target-specific messages and for allowing specific subsets of the DEBUG statements to be printed. The macros are defined in the `/usr/sys/io/cam/cam_debug.h` file.

### 10.1.1 The camdbg_flag Variable

The most significant bit, bit 31, of the `camdbg_flag` variable is the bit that indicates whether the target information is valid. If set, it indicates that the `camdbg_id` variable contains valid bus, target, and LUN information for the device to be tracked. Bits 30 to 0 define the debug flag setting. The possible settings, in ascending hexadecimal order, with a brief description of each, follow:

| Flag Name | Description |
|---|---|
| `CAMD_INOUT` | Routine entry and exit |
| `CAMD_FLOW` | Code flow through the modules |
| `CAMD_PHASE` | SCSI phase values |
| `CAMD_SM` | State machine settings |
| `CAMD_ERRORS` | Error handling |
| `CAMD_CMD_EXP` | Expansion of commands and responses |
| `CAMD_IO_MAPPING` | DME I/O mapping for user space |
| `CAMD_DMA_FLOW` | DME Dynamic Memory Allocation flow |
| `CAMD_DISCONNECT` | Signal disconnect handling |

| Flag Name | Description |
|---|---|
| CAMD_TAGS | Tag queuing code |
| CAMD_POOL | XPT tracking in the DEC CAM packet pool |
| CAMD_AUTOS | Autosense handling |
| CAMD_CCBALLOC | CCB allocation and free flow |
| CAMD_MSGOUT | Messages going out |
| CAMD_MSGIN | Messages coming in |
| CAMD_STATUS | SCSI status bytes |
| CAMD_CONFIG | CAM configuration paths |
| CAMD_SCHED | SIM scheduler points |
| CAMD_SIMQ | SIM queue manipulation |
| CAMD_TAPE | SCSI/CAM peripheral tape flow |
| CAMD_COMMON | SCSI/CAM peripheral common flow |
| CAMD_DISK | SCSI/CAM peripheral disk flow |
| CAMD_DISK_REC | SCSI/CAM peripheral disk recovery flow |
| CAMD_DBBR | SCSI/CAM peripheral disk Dynamic Bad Block Recovery flow |
| CAMD_CDROM | SCSI/CAM peripheral CDROM functions |
| CAMD_INTERRUPT | SIM trace Interrupts |
| TVALID | The bus, target, and LUN bits are valid in the camdbg_id variable |

### 10.1.2 The camdbg_id Variable

The `camdbg_id` variable contains the bus, target, and LUN (B/T/L) information for a specific target to track for debugging information. In the current implementation, the bits are divided into three parts, with the remainder reserved. The bits are allocated as follows: bits 31 to 16, Reserved; bits 15 to 8, Bus number; bits 7 to 4, Target number; and bits 3 to 0, LUN number. Multiples of four bits are used to assign hexadecimal values into the `camdbg_id` variable.

## 10.2 CAM Debugging Macros

The PRINTD and CALLD macros track target-specific messages and allow specific subsets of the debugging statements to be printed.

This PRINTD macro, which prints debugging information if CAMDEBUG is defined, follows.

```
/*
 * Conditionally Print Debug Information.
 */
#if defined(CAMDEBUG) && !defined(lint)
#   define PRINTD(B, T, L, F, X)
    { \ 1
        /* NOSTRICT */                          \
        if( camdbg_flag & (int)F ) \ 2
        { \
```

```
            if( ((camdbg_flag & TVALID) == 0) || \ 3
                (((camdbg_flag & TVALID) != 0) && \ 4
                (((((camdbg_id & BMASK) >> BSHIFT) == B) || (B == NOBTL)) && \ 5
                (((((camdbg_id & TMASK) >> TSHIFT) == T) || (T == NOBTL)) && \
                ((((camdbg_id & LMASK) >> LSHIFT) == L) || (L == NOBTL))) ) \
            { \
            /* VARARGS */ \
            (void)(*cdbg_printf) X ; \
            } \
        } \
    }
#endif /* !defined(lint)
```

1 The B, T, and L arguments are for target-specific tracking. The F argument is a flag for tracking specific subsets of the `printf` statements. The F flag argument is compared with the `camdbg_flag` variable to determine if the user wants to see the message. The X argument must be a complete `printf` argument set enclosed within parentheses, ( ), to allow the preprocessor to include it in the final `printf` statement.

2 This statement checks to see if any of the flags for the PRINTD macro are turned on. It does not look for an exact match so that the same PRINTD macro can be used for different settings of the flags in `camdbg_flag`.

3 This section of code checks for any target information available for tracing a target. The first condition checks to see if the target valid bit is not set. If it is not, the OR condition is met and the call to the `printf` utility is made.

4 If the TVALID bit is set, the bus, target, and LUN fields in the `camdbg_id` variable must be compared to the B, T, and L arguments. If TVALID is true and bus equals B, target equals T, and LUN equals L, then also print.

5 This construct checks the B, T, and L fields. For example, the following statement checks the B field:

```
((((camdbg_id & BMASK) >> BSHIFT) == B) || (B == NOBTL))
```

The statement masks out the other fields and shifts the bus value down to allow comparision with the B argument. The arguments can also have a ‘‘wildcard’’ value, NOBTL. When the wildcard value is used, the B or T or L comparision is always true.

The CALLD macro uses the same `if` statement constructs to conditionally call a debugging function using the following `define` statement:

```
#   define CALLD(B, T, L, F, X)
```

## 10.3 CAM Debugging Routines

The SCSI/CAM peripheral device debugging routines can be allocated into categories as follows:

- Routines that generate reports on CAM functions and status in either a brief form listing the name as it is defined in the applicable header file, or in the form of a sentence. The following routines are in this category:
  - `cdbg_CamFunction`
  - `cdbg_CamStatus`

  - cdbg_ScsiStatus
  - cdbg_SystemStatus
- Routines that dump the contents of CCBs, SCSI/CAM Peripheral Device Driver Working Set Structures, and other SCSI/CAM commands for examination. The following routines are in this category:
  - cdbg_DumpCCBHeader
  - cdbg_DumpCCBHeaderFlags
  - cdbg_DumpSCSIIO
  - cdbg_DumpPDRVws
  - cdbg_DumpABORT
  - cdbg_DumpTERMIO
  - cdbg_DumpBuffer
  - cdbg_GetDeviceName
  - cdbg_DumpInquiryData

Descriptions of the routines with syntax information, in ULTRIX reference page format, are included in alphabetical order in Appendix C.

### 10.3.1 CAM Debugging Status Routines

This section describes the SCSI/CAM peripheral device debugging routines that report status. Table 10-1 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 10-1: CAM Debugging Status Routines**

| Routine | Summary Description |
|---|---|
| cdbg_CamFunction | reports CAM XPT function codes |
| cdbg_CamStatus | decodes CAM CCB status codes |
| cdbg_ScsiStatus | reports SCSI status codes |
| cdbg_SystemStatus | reports system error codes |

#### 10.3.1.1 The cdbg_CamFunction Routine

The cdbg_CamFunction routine reports CAM XPT function codes. Program constants are defined to allow either the function code name only or a brief explanation to be printed. The XPT function codes are defined in the /usr/sys/h/cam.h file.

#### 10.3.1.2 The cdbg_CamStatus Routine

The cdbg_CamStatus routine decodes CAM CCB status codes. Program constants are defined to allow either the status code name only or a brief explanation to be printed. The CAM status codes are defined in the /usr/sys/h/cam.h file.

#### 10.3.1.3 The cdbg_ScsiStatus Routine

The `cdbg_ScsiStatus` routine reports SCSI status codes. Program constants are defined to allow either the status code name only or a brief explanation to be printed. The SCSI status codes are defined in the `/usr/sys/h/scsi_status.h` file.

#### 10.3.1.4 The cdbg_SystemStatus Routine

The cdbg_SystemStatus routine reports system error codes. The system error codes are defined in the `/usr/sys/h/errno.h` file.

### 10.3.2 CAM Dump Routines

This section describes the SCSI/CAM peripheral device debugging routines that dump contents for examination. Table 10-2 lists the name of each routine and gives a summary description of its function. The sections that follow contain a more detailed description of each routine.

**Table 10-2: CAM Dump Routines**

| Routine | Summary Description |
|---|---|
| `cdbg_DumpCCBHeader` | dumps the contents of a CAM Control Block (CCB) header structure |
| `cdbg_DumpCCBHeaderFlags` | dumps the contents of the `cam_flags` member of a CAM Control Block (CCB) header structure |
| `cdbg_DumpSCSIIO` | dumps the contents of a SCSI I/O CCB |
| `cdbg_DumpPDRVws` | dumps the contents of a SCSI/CAM Peripheral Device Driver Working Set Structure |
| `cdbg_DumpABORT` | dumps the contents of an ABORT CCB |
| `cdbg_DumpTERMIO` | dumps the contents of a TERMINATE I/O CCB |
| `cdbg_DumpBuffer` | dumps the contents of a data buffer in hexadecimal bytes |
| `cdbg_GetDeviceName` | returns a pointer to a character string describing the `dtype` member of an ALL_INQ_DATA structure |
| `cdbg_DumpInquiryData` | dumps the contents of an ALL_INQ_DATA structure |

#### 10.3.2.1 The cdbg_DumpCCBHeader Routine

The `cdbg_DumpCCBHeader` routine dumps the contents of a CAM Control Block (CCB) header structure. The CAM Control Block (CCB) header structure is defined in the `/usr/sys/h/cam.h` file.

#### 10.3.2.2 The cdbg_DumpCCBHeaderFlags Routine

The `cdbg_DumpCCBHeaderFlags` routine dumps the contents of the `cam_flags` member of a CAM Control Block (CCB) header structure. The CAM Control Block (CCB) header structure is defined in the `/usr/sys/h/cam.h` file.

#### 10.3.2.3 The cdbg_DumpSCSIIO Routine

The `cdbg_DumpSCSIIO` routine dumps the contents of a SCSI I/O CCB. The SCSI I/O CCB is defined in the `/usr/sys/h/cam.h` file.

#### 10.3.2.4 The cdbg_DumpPDRVws Routine

The `cdbg_DumpPDRVws` routine dumps the contents of a SCSI/CAM Peripheral Device Driver Working Set Structure. The SCSI/CAM Peripheral Device Driver Working Set Structure is defined in the `/usr/sys/h/pdrv.h` file.

#### 10.3.2.5 The cdbg_DumpABORT Routine

The `cdbg_DumpABORT` routine dumps the contents of an ABORT CCB. The ABORT CCB is defined in the `/usr/sys/h/cam.h` file.

#### 10.3.2.6 The cdbg_DumpTERMIO Routine

The `cdbg_DumpTERMIO` routine dumps the contents of a TERMINATE I/O CCB. The TERMINATE I/O CCB is defined in the `/usr/sys/h/cam.h` file.

#### 10.3.2.7 The cdbg_DumpBuffer Routine

The `cdbg_DumpBuffer` routine dumps the contents of a data buffer in hexadecimal bytes. The calling routine must display a header line. The format of the dump is 16 bytes per line.

#### 10.3.2.8 The cdbg_GetDeviceName Routine

The `cdbg_GetDeviceName` routine returns a pointer to a character string describing the `dtype` member of an ALL_INQ_DATA structure. The ALL_INQ_DATA structure is defined in the `/usr/sys/h/scsi_all.h` file.

#### 10.3.2.9 The cdbg_DumpInquiryData Routine

The `cdbg_DumpInquiryData` routine dumps the contents of an ALL_INQ_DATA structure. The ALL_INQ_DATA structure is defined in the `/usr/sys/h/scsi_all.h` file.

# Programmer-Defined SCSI/CAM Device Drivers 11

This chapter describes how programmers can write their own device drivers for SCSI/CAM peripheral devices using a combination of common data structures and routines provided by Digital and programmer-defined routines and data structures. This chapter describes only the programmer-defined data structures and routines. See Chapter 3 for a description of the common data structures and routines.

The chapter also describes how to add a programmer-defined device driver to the USCA system.

## 11.1 Programmer-Defined SCSI/CAM Data Structures

This section describes the SCSI/CAM peripheral data structures programmers must use if they write their own device drivers. The following data structures are described:

- PDRV_UNIT_ELEM – The Peripheral Device Unit Table
- PDRV_DEVICE – The Peripheral Device Structure
- DEV_DESC – The Device Descriptor Structure
- DENSITY_TBL – The Density Table Structure
- MODESEL_TBL – The Mode Select Table Structure

### 11.1.1 Programmer-Defined Peripheral Device Unit Table

The Peripheral Device Unit Table is an array of SCSI/CAM peripheral device unit elements. The size of the array is the maximum number of possible devices, which is determined by the maximum number of SCSI controllers allowed for the system. The structure is allocated statically and is defined as follows:

```
typedef struct pdrv_unit_elem {
        PDRV_DEVICE *pu_device; /* Pointer to peripheral device structure */
        u_short pu_opens;       /* Total number of opens against unit */
        u_short pu_config;      /* Indicates whether the device type */
                                /* configured at this address */
        u_char  pu_type;        /* Device type - byte 0 from inquiry data */
}    PDRV_UNIT_ELEM;
```

#### 11.1.1.1 The pu_device Member

The `pu_device` field is filled in with a pointer to a CAM-allocated peripheral SCSI device (PDRV_DEVICE) structure when the first call to the `ccmn_open_unit` routine is issued for a SCSI device that exists.

#### 11.1.1.2 The pu_opens Member

The total number of opens against the unit.

#### 11.1.1.3 The pu_config Member

Indicates whether a device of the specified type is configured at this bus/target/LUN.

#### 11.1.1.4 The pu_type Member

The device type from byte 0 (zero) of the Inquiry data.

### 11.1.2 Programmer-Defined Peripheral Device Structure

A SCSI/CAM peripheral device structure, PDRV_DEVICE, is allocated for each SCSI device that exists in the system. The PDRV_DEVICE structure is defined as follows:

```
typedef struct pdrv_device {
        PD_LIST pd_active_list; /* Forward active pointer of CCBs */
                                /* which have been sent to the XPT */
        u_long  pd_active_ccb;  /* Number of active CCBs on queue */
        u_long  pd_que_depth;   /* Tagged queue depth - indicates the */
                               /* maximum number of commands the unit */
                               /* can store internally */
        PD_LIST pd_pend_list;   /* Forward active pointer of pending CCBs */
                                /* which have not been sent to the XPT due */
                                /* to a full queue for tagged requests */
        u_long  pd_pend_ccb;    /* Number of pending CCBs */
        dev_t   pd_dev;         /* CAM major/minor number */
        u_char  pd_bus;         /* SCSI controller number */
        u_char  pd_target;      /* SCSI target id */
        u_char  pd_lun;         /* SCSI target lun */
        u_char  pd_unit;        /* Unit number */
        u_long  pd_soft_err;    /* Number of soft errors */
        u_long  pd_hard_err;    /* Number of hard errors */
        u_short pd_soft_err_limit;/* Max no. of soft errors to report */
        u_short pd_hard_err_limit;/* Max no. of hard errors to report */
        u_long  pd_flags;       /* Specific to peripheral drivers */
        u_char  pd_state;       /* Specific to peripheral drivers - can */
                                /* be used for recovery */
        u_char  pd_abort_cnt;   /* Specific to peripheral drivers - can */
                                /* be used for recovery */
        u_long  pd_cam_flags;   /* Used to hold the default settings */
                                /* for the cam_flags field in CCBs */
        u_char  pd_tag_action;  /* Used to hold the default settings for */
                                /* the cam_tag_action field of the SCSI */
                                /* I/O CCB */
        u_char  pd_dev_inq[INQLEN];
                                /* Inquiry data obtained from GET */
                                /* DEVICE TYPE CCB */
        u_long  pd_ms_index;    /* Contains the current index into the */
                                /* Mode Select Table when sending Mode */
                                /* Select data on first open */
        DEV_DESC  *pd_dev_desc; /* Pointer to our device descriptor */
        caddr_t pd_specific;    /* Pointer to device specific info */
        u_short pd_spec_size;   /* Size of device specific info */
        caddr_t pd_sense_ptr;   /* Pointer to the last sense data */
                                /* bytes retrieved from device */
        u_short pd_sense_len;   /* Length of last sense data */
        void    (*pd_recov_hand)();
                                /* Specific to peripheral drivers - can */
```

```
                                /* be used to point to the recovery */
                                /* handler for the device */
        u_long pd_read_count;   /* Number of reads to device */
        u_long pd_write_count;  /* Number of writes to device */
        u_long pd_read_bytes;   /* Number of bytes read from device */
        u_long pd_write_bytes;  /* Number of bytes written to device */
        struct lock_t   pd_lk_device;
                                /* SMP lock for the device */
} PDRV_DEVICE
```

#### 11.1.2.1 The pd_active_list Member

A pointer to the first CCB on the active queue.

#### 11.1.2.2 The pd_active_ccb Member

The number of CCBs on the active queue.

#### 11.1.2.3 The pd_que_depth Member

The depth of the tagged queue, which is the maximum number of commands that the peripheral driver will send to the SCSI device.

#### 11.1.2.4 The pd_pend_list Member

A pointer to the first CCB on the pending queue.

#### 11.1.2.5 The pd_pend_ccb Member

The number of CCBs on the pending queue.

#### 11.1.2.6 The pd_dev Member

The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

#### 11.1.2.7 The pd_bus Member

SCSI target’s bus controller number.

#### 11.1.2.8 The pd_target Member

SCSI target’s ID number.

#### 11.1.2.9 The pd_lun Member

SCSI target’s logical unit number.

#### 11.1.2.10 The pd_unit Member

SCSI device’s unit number.

#### 11.1.2.11 The pd_flags and pd_state Members

These are specific to SCSI/CAM peripheral device drivers. They can be used for recovery.

#### 11.1.2.12 The pd_abort_cnt Member

This is specific to SCSI/CAM peripheral device drivers. It can be used for recovery.

#### 11.1.2.13 The pd_cam_flags Member

This contains the default settings for the `cam_flags` field in the CAM Control Block (CCB) header structure. The flags are defined in the `/usr/sys/h/cam.h` file.

#### 11.1.2.14 The pd_tag_action Member

This contains the default settings for the HBA/SIM queue actions field, `cam_tag_action`, in the SCSI I/O CCB structure. The queue actions are defined in the `/usr/sys/h/cam.h` file.

#### 11.1.2.15 The pd_dev_inq Member

This is inquiry data.

#### 11.1.2.16 The pd_ms_index Member

The current index into the Mode Select Table that is pointed to in the Device Descriptor Structure.

#### 11.1.2.17 The pd_dev_desc Member

A pointer to the DEV_DESC structure for the SCSI device.

#### 11.1.2.18 The pd_specific Member

A pointer to a device-specific structure filled in by the `ccmn_open_unit` routine.

#### 11.1.2.19 The pd_spec_size Member

The size of the device-specific information.

#### 11.1.2.20 The pd_sense_ptr Member

A pointer to the last sense data bytes retrieved from the device.

#### 11.1.2.21 The pd_sense_len Member

The length, in bytes, of the last sense data retrieved from the device.

#### 11.1.2.22 The pd_recov_hand Member

This is specific to SCSI/CAM peripheral device drivers. It can be used to point to the recovery handler for the device.

#### 11.1.2.23 The pd_read_count Member

Number of read operations from device. Used for performance statistics.

#### 11.1.2.24 The pd_write_count Member

Number of write operations to device. Used for performance statistics.

#### 11.1.2.25 The pd_read_bytes Member

Total number of bytes read from device. Used for performance statistics.

#### 11.1.2.26 The pd_write_bytes Member

Total number of bytes written to device. Used for performance statistics.

#### 11.1.2.27 The pd_lk_device Member

The lock structure.

### 11.1.3 Programmer-Defined Device Descriptor Structure

A Device Descriptor Structure entry, DEV_DESC, must be added to the `cam_devdesc_tab` for each programmer-defined SCSI device that exists in the system. The file `/usr/sys/data/cam_data.c` contains examples of entries supplied by Digital. The DEV_DESC structure is defined as follows:

```
typedef struct dev_desc {
        u_char  dd_pv_name[IDSTRING_SIZE];
                                /* Product ID and vendor string from */
                                /* Inquiry data */
        u_char  dd_length;      /* Length of dd_pv_name string */
        u_char  dd_dev_name[DEV_NAME_SIZE];
                                /* Device name string - see defines */
                                /* in devio.h */
        u_long  dd_device_type; /* Bits 0 - 23 contain the device */
                                /* class, bits 24-31 contain the */
                                /* SCSI device type */
        struct  pt_info *dd_def_partition;
                                /* Default partition sizes - disks */
        u_long  dd_block_size;  /* Block/sector size  */
        u_long  dd_max_record;  /* Maximun transfer size in bytes */
                                /* allowed for the device */
        DENSITY_TBL *dd_density_tbl;
                                /* Pointer to density table - tapes */
        MODESEL_TBL *dd_modesel_tbl;
                                /* Mode select table pointer - used */
                                /* on open and recovery */
        u_long  dd_flags;       /* Option flags (bbr, etc) */
        u_long  dd_scsi_optcmds;/* Optional commands supported */
        u_long  dd_ready_time;  /* Time in seconds for powerup dev ready */
        u_short dd_que_depth;   /* Device queue depth for devices */
                                /* which support command queueing */
        u_char  dd_valid;       /* Indicates which data length */
                                /* fields are valid */
        u_char  dd_inq_len;     /* Inquiry data length for device */
        u_char  dd_req_sense_len;
                                /* Request sense data length for */
                                /* this device */
}DEV_DESC;
```

#### 11.1.3.1 The dd_pv_name Member

The product ID and vendor returned string identifying the drive obtained from the Inquiry data. The product ID makes up the first eight characters of the string. The IDSTRING_SIZE constant is defined in the `/usr/sys/h/pdrv.h` file.

#### 11.1.3.2 The dd_length Member

This specifies the length of the `dd_pv_name` string. The match is made on the total string returned by the unit.

#### 11.1.3.3 The dd_dev_name Member

The ULTRIX device name string, which is defined in the `/usr/sys/h/devio.h` file. A generic name of DEV_RZxx should be used for non-Digital disk devices. The following generic names are provided for tapes: DEV_TZQIC, for 1/4-inch cartridge tape units; DEV_TZ9TK for 9-track tape units; DEV_TZ8MM, for 8-millimeter tape units; DEV_TZRDAT, for RDAT tape units; DEV_TZ3480, for IBM 3480-compatible tape units; and DEV_TZxx, for tape units that do not fit into any of the predefined generic categories.

#### 11.1.3.4 The dd_device_type Member

Bits 24-31 contain the SCSI device class, for example, ALL_DTYPE_DIRECT, which is defined in the `/usr/sys/h/scsi_all.h` file. The bits 0-23 contain the device subclass, for example, SZ_HARD_DISK, which is defined in the `/usr/sys/h/pdrv.h` file.

#### 11.1.3.5 The dd_def_partition Member

A pointer to the default partition sizes for disks, which are defined in the `/usr/sys/data/cam_data.c` file. Tape devices should define this as `sz_null_sizes`. Disk devices may use `sz_rzxx_sizes`, which assumes that the disk has at least 48 Mbytes. The `sz_rzxx_sizes` should not be modified. If you want to create your own partition table, make an entry for your device in the device descriptor table in the `/usr/sys/data/cam_data.c` file.

#### 11.1.3.6 The dd_block_size Member

The block or sector size of the unit, in bytes, for disks and CDROMs. You can obtain the correct number of bytes from the documentation for your device.

#### 11.1.3.7 The dd_max_record Member

The maximum number of bytes that can be transferred in one request for raw I/O. Errors result if your system does not have enough physical memory or if the unit cannot handle the size of transfer specified.

#### 11.1.3.8 The dd_density_tbl Member

A pointer to the Density Table Structure entry for a tape device.

#### 11.1.3.9 The dd_modesel_tbl Member

A pointer to the Mode Select Table Structure entry for the devices. The Mode Select Table Structure is read and sent to the SCSI device when the first open call is issued and during recovery. This field is optional and should be used only for advanced SCSI device customization.

#### 11.1.3.10 The dd_flags Member

The option flags, which can be SZ_NOSYNC, indicating that the device cannot handle synchronous transfers; SZ_BBR, indicating that the device allows bad block recovery; SZ_NO_DISC, indicating that the device cannot handle disconnects; and SZ_NO_TAG, indicating tagged queueing is not allowed. SZ_NO_TAG overrides inquiry data. The flags are defined in the `/usr/sys/h/pdrv.h` file.

#### 11.1.3.11 The dd_scsi_optcmds Member

The optional SCSI commands that are supported, as defined in the `/usr/sys/h/pdrv.h` file. The possible commands are NO_OPT_CMDS; SZ_RW10, which enables reading and writing 10-byte CDBs; SZ_PREV_ALLOW, which prevents or allows media removal; and SZ_EXT_RESRV, which enables reserving or releasing file extents.

#### 11.1.3.12 The dd_ready_time Member

The maximum time, in seconds, allowed for the device to power up. For disks, this represents power up and spin up time. For tapes, it represents power up, load, and rewind to Beginning of Tape.

#### 11.1.3.13 The dd_que_depth Member

The maximum number of queued requests for devices that support queueing. Refer to the documentation for your device to determine if your device supports tag queuing and, if so, the depth of the queue.

#### 11.1.3.14 The dd_valid Member

This indicates which data length fields are valid. The data length bits, DD_REQSNS_VAL and DD_INQ_VAL, are defined in the `/usr/sys/h/pdrv.h` file.

#### 11.1.3.15 The dd_inq_len Member

The inquiry data length for the device. This field must be used in conjunction with the DD_INQ_VAL flag.

#### 11.1.3.16 The dd_req_sense_len Member

The request Sense data length for the device. This field must be used in conjunction with the DD_REQSNS_VAL flag.

### 11.1.4 Programmer-Defined Density Table Structure

The Density Table Structure allows for the definition of eight densities for each type of SCSI tape device unit. A density is defined using the lower three bits of the unit's minor number. Refer to the SCSI tape device unit documentation for the density code, compression code, and blocking factor for each density.

The `/usr/sys/data/cam_data.c` file contains Density Table Structure entries for all devices known to Digital. Programmers can add entries for other SCSI tape devices at the end of the Digital entries. The definition for the Density Table Structure, DENSITY_TBL, follows:

```
typedef struct density_tbl {
        struct density{
           u_char    den_flags;         /* VALID, ONE_FM etc */
           u_char    den_density_code;
           u_char    den_compress_code; /* Compression code if supported */
           u_char    den_speed_setting; /* for this density */
           u_char    den_buffered_setting;
                                        /* Buffer control setting */
           u_long    den_blocking;      /* 0 variable etc. */
        }density[MAX_TAPE_DENSITY];
}DENSITY_TBL;
```

#### 11.1.4.1 The den_flags Member

The `den_flags` specified indicate which fields in the DENSITY_TBL structure are valid for this density. The flags are: DENS_VALID, to indicate whether the structure is valid; ONE_FM, to write one file mark on closing for QIC tape units; DENS_SPEED_VALID, to indicate the speed setting is valid for multispeed tapes; DENS_BUF_VALID, to run in buffered mode; and DENS_COMPRESS_VALID, to indicate compression code, if supported.

#### 11.1.4.2 The den_density_code Member

The `den_density_code` member contains the SCSI density code for this density.

#### 11.1.4.3 The den_compress_code Member

The `den_compress_code` member contains the SCSI compression code for this density, if the unit supports compression.

#### 11.1.4.4 The den_speed_setting Member

The `den_speed_setting` member contains the speed setting for this density. Some units support variable speed for certain densities.

#### 11.1.4.5 The den_buffered_setting Member

The `den_buffered_setting` member contains the buffer control setting for this density.

#### 11.1.4.6 The den_blocking Member

The `den_blocking` member contains the blocking factor for this SCSI tape device. A NULL (0) setting specifies that the blocking factor is variable. A positive value represents the number of bytes in a block, for example, 512 or 1024.

#### 11.1.4.7 Sample Density Table Structure Entry

This section contains a sample portion of a Density Table Structure entry for the TZK10 SCSI tape device, which supports both fixed and variable length records:

```
DENSITY_TBL
tzk10_dens = {
{ Minor 00

Flags
DENS_VALID | DENS_BUF_VALID |ONE_FM ,

Density code   Compression code        Speed setting
SEQ_8000R_BPI,         NULL,                   NULL,

Buffered setting       Blocking
1,                     512
},
   .
   .
   .
{ Minor 06

Flags
DENS_VALID | DENS_BUF_VALID |ONE_FM ,

Density code   Compression code        Speed setting
SEQ_QIC320,            NULL,                   NULL,

Buffered setting       Blocking
1,                     1024
},
{ Minor 07

Flags
DENS_VALID | DENS_BUF_VALID |ONE_FM ,

Density code   Compression code        Speed setting
SEQ_QIC320,            NULL,                   NULL,

Buffered setting       Blocking
1,                     NULL
}
}; end of tzk10_dens
```

### 11.1.5 Programmer-Defined Mode Select Table Structure

The Mode Select Table Structure is read and sent to the SCSI device when the first call to the SCSI/CAM peripheral open routine is issued on a SCSI device. There can be a maximum of eight entries in the Mode Select Table Structure. The definition for the Mode Select Table Structure, MODESEL_TBL, follows:

```
typedef struct modesel_tbl {
        struct ms_entry{
           u_char  ms_page;     /* Page number */
           u_char  *ms_data;    /* Pointer to Mode Select data */
           u_char  ms_data_len; /* Mode Select data length */
           u_char  ms_ent_sp_pf;/* Save Page and Page format bits */
                                /* BIT 0   1=Save Page, */
                                /*         0=Don't Save Page */
                                /* BIT 1  1=SCSI-2, 0=SCSI-1 */
     }ms_entry[MAX_OPEN_SELS];
}MODESEL_TBL;
```

#### 11.1.5.1 The ms_page Member

The `ms_page` member contains the SCSI page number for the device type. For example, the page number would be 0x10 for the device configuration page for a SCSI tape device.

#### 11.1.5.2 The ms_data Member

The `ms_data` member contains a pointer to the mode select data for the device. Set up the page data and place the address of the page structure in this field. A sample page definition for page 0x10 for the TZK10 follows:

```
SEQ_MODE_DATA6
tzk10_page10 = {

{ Parameter header

mode_len        medium type     speed
NULL,           NULL,           NULL,

Buf_mode        wp              blk_desc_len
0x01,           NULL,           sizeof(SEQ_MODE_DESC)
},
{ Mode descriptor

Density num_blks2       num_blks1
NULL,           NULL,           NULL,

num_blks0       reserved        blk_len2
NULL,                           NULL,

blk_len1        blk_len0
NULL,           NULL
},
{
Page data for page 0x2

PAGE header
byte0   byte1
0x10,        0x0e,

byte2    byte3    byte4    byte5    byte6
0x00,    0x00,    40,      40,      NULL,

byte7    byte8    byte9    byte10   byte11
NULL,    0xe0,    NULL,    0x38,    NULL,

byte12   byte13   byte14   byte15
NULL,    NULL,    NULL,    NULL
}
};
```

#### 11.1.5.3 The ms_data_len Member

The `ms_data_len` member contains length of a page, which is the number of bytes to be sent to the device.

#### 11.1.5.4 The ms_ent_sp_pf Member

The `ms_ent_sp_pf` member contains flags for the MODE SELECT CDB that the device driver formats.

#### 11.1.5.5 Sample Mode Select Table Structure Entry

This section contains a sample portion of a Mode Select Table Structure entry for the TZK10 SCSI tape device:

```
MODESEL_TBL
tzk10_mod = {
{ MODE PAGE ENTRY 1

Page number             The data pointer
0x02,                   (u_char *)&tzk10_page2,

Data len                SCSI2??
28,                  0x2
},
   .
   .
   .
{ MODE PAGE ENTRY 8

Page number             The data pointer
NULL,                   (u_char *)NULL,

Data len                SCSI2??
NULL,                   NULL
},
};
```

## 11.2 Sample SCSI/CAM Device-Specific Data Structures

This section provides samples of the SCSI/CAM peripheral data structures programmers must define if they write their own device drivers. The following data structures are described:

- TAPE_SPECIFIC – The Tape-Specific Structure
- DISK_SPECIFIC – The Disk- and CDROM-Specific Structure

### 11.2.1 Programmer-Defined Tape-Specific Structure

SCSI/CAM peripheral device driver writers can create their own tape-specific data structures. A sample TAPE_SPECIFIC structure for a SCSI tape device, as defined in the `/usr/sys/io/cam/cam_tape.h` file, follows:

```
typedef struct {
        u_long  ts_flags;       /* Tape flags - BOM,EOT */
        u_long  ts_state_flags; /* STATE - UNIT_ATTEN, RESET etc. */
        u_long  ts_resid;       /* Last operation residual count */
        u_long  ts_block_size;  /* See below for a complete desc. */
        u_long  ts_density;     /* What density are we running at */
        u_long  ts_records;     /* How many records in since last tpmark */
        u_long  ts_num_filemarks; /* number of file marks into tape */
        u_long  ts_softcnt;     /* Number of soft errors */
        u_long  ts_hardcnt;     /* Number of hard errors */
}TAPE_SPECIFIC;
```

#### 11.2.1.1 The ts_flags Member

Flags used to indicate tape condition. The possible flags are:

| Flag Name | Description |
|---|---|
| CTAPE_BOM | The tape is positioned at the beginning. |
| CTAPE_EOM | The unit is positioned at the end of media. |
| CTAPE_OFFLINE | The device is returning DEVICE NOT READY in response to a command. The media is either not loaded or is being loaded. |
| CTAPE_WRT_PROT | The unit is either write protected or is opened read only. |
| CTAPE_BLANK | The tape is blank. |
| CTAPE_WRITTEN | The tape has been written during this procedure. |
| CTAPE_CSE | Clear serious exception. |
| CTAPE_SOFTERR | A soft error has been reported by the SCSI unit. |
| CTAPE_HARDERR | A hard error has been reported by the SCSI unit. It can be reported either through an `ioctl` or by marking the `buf` structure as EIO. |
| CTAPE_DONE | The tape procedure is finished. |
| CTAPE_RETRY | Indicates a retry can be attempted. |
| CTAPE_ERASED | The tape has been erased. |
| CTAPE_TPMARK | A tape mark has been detected during a read opeation. This cannot occur during a write operation. |
| CTAPE_SHRTREC | The size of the record retrieved is less than the size requested. Reported using an ioctl. |
| CTAPE_RDOPP | Reading in the reverse direction. This is not implemented. |
| CTAPE_REWINDING | The tape is rewinding. |
| CTAPE_TPMARK_PENDING | The tape mark is to be reported on the next I/O operation. |

#### 11.2.1.2 The ts_state_flags Member

Flags used to indicate tape state. The possible flags are:

| Flag Name | Description |
|---|---|
| CTAPE_NOT_READY_STATE | The unit was opened with the FNDELAY flag. The unit was detected, but the open failed. |
| CTAPE_UNIT_ATTEN_STATE | A check condition occurred and the sense key was UNIT ATTENTION. This usually indicates that the media was changed. Current tape position is lost. |

| Flag Name | Description |
|---|---|
| CTAPE_RESET_STATE | Indicates a reset condition on the device or on the bus. |
| CTAPE_RESET_PENDING_STATE | A reset is pending. |
| CTAPE_OPENED_STATE | The unit is opened. |
| CTAPE_DISEOT_STATE | No notification of end of media is required. |
| CTAPE_ABORT_TPPEND_STATE | Indicates that a tape mark was detected for a fixed block operation with nonbuffered I/O. The queue is aborted. |
| CTAPE_AUTO_DENSITY_VALID_STATE | Directs the open routine to call the ctz_auto_density routine when a unit attention is noticed, because tape density has been determined and all reads are to occur at that density. |
| CTAPE_ORPHAN_CMD_STATE | This flag is set when a command is orphaned. The process does not wait for completion, such as a rewind operation. |
| CTAPE_POSITION_LOST_STATE | Tape position is lost due to command failure. |

#### 11.2.1.3 The ts_resid Member

Residual count from the last tape command.

#### 11.2.1.4 The ts_block_size Member

Used to distinguish between blocks and bytes for fixed-block tapes. Commands for devices like 9-track tape, which have variable length records, assume bytes.

#### 11.2.1.5 The ts_density Member

The current density at which the SCSI tape device is operating.

#### 11.2.1.6 The ts_records Member

The number of records read since the last tape mark.

#### 11.2.1.7 The ts_num_filemarks Member

The number of file marks encountered since starting to read the tape.

#### 11.2.1.8 The ts_softcnt Member

Number of soft errors reported by each SCSI unit.

#### 11.2.1.9 The ts_hardcnt Member

Number of hard errors reported by each SCSI unit.

### 11.2.2 Programmer-Defined Disk- and CDROM-Specific Structure

SCSI/CAM peripheral device driver writers can create their own disk- and CDROM-specific data structures. A sample DISK_SPECIFIC structure for a SCSI disk device, as defined in the `/usr/sys/io/cam/cam_disk.h` file, follows:

```
typedef struct disk_specific  {
        struct buf *ds_bufhd;           /* Anchor for requests which come */
                                        /* into strategy that cannot be */
                                        /* started due to error recovery */
                                        /* in progresss. */
        int        ds_dkn;              /* Used for system statistics */
        u_long     ds_bbr_state;        /* Used indicate the current */
                                        /* BBR state if active */
        u_long     ds_bbr_retry;        /* BBR retries for reassignment */
        CCB_SCSIIO *ds_bbr_rwccb;       /* R/W ccb used for BBR */
        CCB_SCSIIO *ds_bbr_reasccb;     /* Reassign ccb used for BBR */
        CCB_SCSIIO *ds_tur_ccb;         /* SCSI I/O CCB for tur cmd */
                                        /* during recovery */
        CCB_SCSIIO *ds_start_ccb;       /* SCSI I/O CCB for start unit */
        CCB_SCSIIO *ds_mdsel_ccb;       /* SCSI I/O CCB for mode select */
                                        /* cmd during recovery */
        CCB_SCSIIO *ds_rdcp_ccb;        /* SCSI I/O CCB for read capacity */
                                        /* cmd during recovery */
        CCB_SCSIIO *ds_read_ccb;        /* SCSI I/O CCB for Read cmd */
                                        /* during recovery */
        CCB_SCSIIO *ds_prev_ccb;        /* SCSI I/O CCB for Prevent */
                                        /* Media Removal cmd during recovery */
        u_long     ds_block_size;       /* This units block size */
        u_long     ds_tot_size;         /* Total disk size in blocks */
        u_long     ds_media_changes;    /* Number of times media was */
                                        /* changed - removables */
        struct pt  ds_pt;               /* Partition structure */
        u_long     ds_openpart;         /* Bit mask of open parts */
}DISK_SPECIFIC;
```

#### 11.2.2.1 The ds_bufhd Member

Pointer to a buffer header structure to contain requests that come to the driver but cannot be started due to error recovery in progress. The requests are issued when error recovery is complete.

#### 11.2.2.2 The ds_dkn Member

Used for system statistics.

#### 11.2.2.3 The ds_bbr_state Member

Used to indicate the current state if bad block recovery (BBR) is active.

#### 11.2.2.4 The ds_bbr_retry Member

Number of retries to attempt for reassignment of bad blocks.

#### 11.2.2.5 The ds_bbr_rwccb Member

Pointer for the SCSI I/O CCB for the Read/Write command used for recovery.

#### 11.2.2.6 The ds_bbr_reasccb Member

Pointer for the SCSI I/O CCB for the Reassign command used for recovery.

#### 11.2.2.7 The ds_tur_ccb Member

Pointer for the SCSI I/O CCB for the TEST UNIT READY command used for recovery.

#### 11.2.2.8 The ds_start_ccb Member

Pointer for the SCSI I/O CCB for the START UNIT command used for recovery.

#### 11.2.2.9 The ds_mdsel_ccb Member

Pointer for the SCSI I/O CCB for the MODE SELECT command used for recovery.

#### 11.2.2.10 The ds_rdcp_ccb Member

Pointer for the SCSI I/O CCB for the Read Capacity command used for recovery.

#### 11.2.2.11 The ds_read_ccb Member

Pointer for the SCSI I/O CCB for the Read command used for recovery.

#### 11.2.2.12 The ds_prev_ccb Member

Pointer for the SCSI I/O CCB for the Prevent Removal command during recovery.

#### 11.2.2.13 The ds_block_size Member

This SCSI disk device's block size in bytes.

#### 11.2.2.14 The ds_tot_size Member

Total SCSI disk device size in blocks.

#### 11.2.2.15 The ds_media_changes Member

For removable media, the number of times the media was changed.

#### 11.2.2.16 The ds_pt Sructure

Structure defining the current disk partition layout.

#### 11.2.2.17 The ds_openpart Member

Bit mask of open partitions.

### 11.2.3 SCSI/CAM CDROM/AUDIO I/O Control Commands

This section describes the standard and vendor-unique I/O control commands to use for SCSI CDROM/AUDIO devices. The commands are defined in the `/usr/sys/io/cam/cam_disk.h` file. See Chapter 13 of American National Standard for Information Systems, *Small Computer Systems Interface - 2* (SCSI - 2),

X3T9/89-042 for general information about the CDROM device model. Table 11-1 lists the name of each command and describes its function.

**Table 11-1: SCSI/CAM CDROM/AUDIO I/O Control Commands**

| Command | Description |
|---|---|
| **Standard Commands** | |
| CDROM_PAUSE_PLAY | Pauses audio operation |
| CDROM_RESUME_PLAY | Resumes audio operation |
| CDROM_PLAY_AUDIO | Plays audio in Logical Block Address (LBA) format |
| CDROM_PLAY_AUDIO_MSF | Plays audio in Minute-/Second-/Frame-units (MSF) format |
| CDROM_PLAY_AUDIO_TI | Plays audio track or index |
| CDROM_PLAY_AUDIO_TR | Plays audio track relative |
| CDROM_TOC_HEADER | Reads Table of Contents (TOC) header |
| CDROM_TOC_ENTRYS | Reads Table of Contents (TOC) entries |
| CDROM_EJECT_CADDY | Ejects the CDROM caddy |
| CDROM_READ_SUBCHANNEL | Reads subchannel data |
| CDROM_READ_HEADER | Reads track header |
| **Vendor-Unique Commands** | |
| CDROM_PLAY_VAUDIO | Plays audio LBA format |
| CDROM_PLAY_MSF | Plays audio MSF format |
| CDROM_PLAY_TRACK | Plays audio track |
| CDROM_PLAYBACK_CONTROL | Controls playback |
| CDROM_PLAYBACK_STATUS | Checks playback status |
| CDROM_SET_ADDRESS_FORMAT | Sets address format |

#### 11.2.3.1 Structures Used by SCSI/CAM CDROM/AUDIO I/O Control Commands

Some of the SCSI CDROM/AUDIO device I/O control commands use data structures. This section describes those data structures. The structures are defined in the `/usr/sys/io/cam/cam_disk.h` file. Table 11-2 lists the name of each structure and the commands that use it.

**Table 11-2: Structures Used by SCSI/CAM CDROM/AUDIO I/O Control Commands**

| Structure | Command |
|---|---|
| cd_address | All |
| cd_play_audio | CDROM_PLAY_AUDIO<br>CDROM_PLAY_VAUDIO |
| cd_play_audio_msf | CDROM_PLAY_AUDIO_MSF<br>CDROM_PLAY_MSF |
| cd_play_audio_ti | CDROM_PLAY_AUDIO_TI |
| cd_play_track | CDROM_PLAY_AUDIO_TR<br>CDROM_PLAY_TRACK |
| cd_toc_header | CDROM_TOC_HEADER |

**Table 11-2: (continued)**

| Structure | Command |
|---|---|
| cd_toc | CDROM_TOC_ENTRYS |
| cd_toc_entry | CDROM_TOC_ENTRYS |
| cd_sub_channel | CDROM_READ_SUBCHANNEL |
| cd_subc_position | CDROM_READ_SUBCHANNEL |
| cd_subc_media_catalog | CDROM_READ_SUBCHANNEL |
| cd_subc_isrc_data | CDROM_READ_SUBCHANNEL |
| cd_subc_header | CDROM_READ_SUBCHANNEL |
| cd_subc_channel_data | CDROM_READ_SUBCHANNEL |
| cd_subc_information | CDROM_READ_SUBCHANNEL |
| cd_read_header | CDROM_READ_HEADER |
| cd_read_header_data | CDROM_READ_HEADER |
| cd_playback | CDROM_PLAYBACK_CONTROL<br>CDROM_PLAYBACK_STATUS |

#### 11.2.3.1.1 Structure Used by All SCSI/CAM CDROM/AUDIO I/O Control Commands –

This section describes the `cd_address` union that defines the SCSI CDROM/AUDIO device Track Address structure and that all the SCSI CDROM/AUDIO device I/O control commands use. The SCSI CDROM/AUDIO device returns track addresses in either LBA or MSF format.

```
union cd_address {
     struct {
          u_char          : 8;
          u_char    m_units;
          u_char    s_units;
          u_char    f_units;
     } msf;                    /* Minutes/Seconds/Frame format     */
         struct {
          u_char    addr3;
          u_char    addr2;
          u_char    addr1;
          u_char    addr0;
     } lba;                    /* Logical Block Address format     */
};
/*
 * CD-ROM Address Format Definitions.
 */
#define CDROM_LBA_FORMAT        0       /* Logical Block Address format */
#define CDROM_MSF_FORMAT        1       /* Minute Second Frame format */
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| m_units | The minute-units binary number of the MSF format for CDROM media |

| Structure Member | Description |
|---|---|
| s_units | The second-units binary number of the MSF format for CDROM media |
| f_units | The frame-units binary number of the MSF format for CDROM media |
| addr3 | The fourth logical block address of LBA format for disk media |
| addr2 | The third logical block address of LBA format for disk media |
| addr1 | The second logical block address of LBA format for disk media |
| addr0 | The first logical block address of LBA format for disk media |

#### 11.2.3.1.2 Structure Used by the CDROM_PLAY_AUDIO and CDROM_PLAY_VAUDIO Commands –

This section describes the structure that is used by the CDROM_PLAY_AUDIO and CDROM_PLAY_VAUDIO commands. The structure is defined as follows:

```
struct cd_play_audio {
        u_long  pa_lba;   /* Logical block address. */
        u_long  pa_length;     /* Transfer length in blocks. */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| pa_lba | The LBA where the audio playback operation is to begin. |
| pa_length | The number of contiguous logical blocks to be played. |

#### 11.2.3.1.3 Structure Used by the CDROM_PLAY_AUDIO_MSF and CDROM_PLAY_MSF Commands –

This section describes the structure that is used by the CDROM_PLAY_AUDIO_MSF and CDROM_PLAY_MSF commands. The structure is defined as follows:

```
struct cd_play_audio_msf {
        u_char msf_starting_M_unit;     /* Starting M-unit */
        u_char msf_starting_S_unit;     /* Starting S-unit */
        u_char msf_starting_F_unit;     /* Starting F-unit */
        u_char msf_ending_M_unit;       /* Ending M-unit */
        u_char msf_ending_S_unit;       /* Ending S-unit */
        u_char msf_ending_F_unit;       /* Ending F-unit */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| msf_starting_M_unit | The minute-unit field of the absolute MSF address at which the audio play operation is to begin. |
| msf_starting_S_unit | The second-unit field of the absolute MSF address at which the audio play operation is to begin. |
| msf_starting_F_unit | The frame-unit field of the absolute MSF address at which the audio play operation is to begin. |
| msf_ending_M_unit | The minute-unit field of the absolute MSF address at which the audio play operation is to end. |
| msf_ending_S_unit | The second-unit field of the absolute MSF address at which the audio play operation is to end. |
| msf_ending_F_unit | The frame-unit field of the absolute MSF address at which the audio play operation is to end. |

**11.2.3.1.4 Structure Used by the CDROM_PLAY_AUDIO_TI Command –** This section describes the structure that is used by the CDROM_PLAY_AUDIO_TI command. The structure is defined as follows:

```
/*
 * Define Minimum and Maximum Values for Track & Index.
 */
#define CDROM_MIN_TRACK         1       /* Minimum track number */
#define CDROM_MAX_TRACK         99      /* Maximum track number */
#define CDROM_MIN_INDEX         1       /* Minimum index value */
#define CDROM_MAX_INDEX         99      /* Maximum index value */

struct cd_play_audio_ti {
        u_char  ti_starting_track;      /* Starting track number */
        u_char  ti_starting_index;      /* Starting index value */
        u_char  ti_ending_track;        /* Ending track number */
        u_char  ti_ending_index;        /* Ending index value */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| ti_starting_track | The track number at which the audio play operation starts. |
| ti_starting_index | The index number within the track at which the audio play operation starts. |
| ti_ending_track | The track number at which the audio play operation ends. |

| Structure Member | Description |
|---|---|
| ti_ending_index | The index number within the track at which the audio play operation ends. |

**11.2.3.1.5 Structure Used by the CDROM_PLAY_AUDIO_TR Command –** This section describes the structure that is used by the CDROM_PLAY_AUDIO_TR command. The structure is defined as follows:

```
struct cd_play_audio_tr {
        u_long  tr_lba;                 /* Track relative LBA */
        u_char  tr_starting_track;      /* Starting track number */
        u_short tr_xfer_length;         /* Transfer length */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| tr_lba | The logical block address relative to the track being played. A negative value indicates a start location within the audio pause area at the beginning of the track. |
| tr_starting_track | Track number at which play is to start. |
| tr_xfer_length | The number of contiguous logical blocks to be output as audio data. |

**11.2.3.1.6 Structure Used by the CDROM_TOC_HEADER Command –** This section describes the structure that is used by the CDROM_TOC_HEADER command. The structure is defined as follows:

```
struct cd_toc_header {
        u_char  th_data_len1;           /* TOC data length MSB */
        u_char  th_data_len0;           /* TOC data length LSB */
        u_char  th_starting_track;      /* Starting track number */
        u_char  th_ending_track;        /* Ending track number */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| th_data_len1 | The total number of bytes in the table of contents for MSF format. |
| th_data_len0 | The total number of bytes in the table of contents for LBA format. |
| th_starting_track | Starting track number for which data is to be returned. If the value is 0 (zero), data is to be returned starting with the first track on the medium. |

| Structure Member | Description |
|---|---|
| th_ending_track | The track number at which the audio play operation ends. |

**11.2.3.1.7 Structures Used by the CDROM_TOC_ENTRYS Command –** This section describes the structures that are used by the CDROM_TOC_ENTRYS command. The structures are defined as follows:

```
struct cd_toc {
        u_char  toc_address_format;     /* Address format to return */
        u_char  toc_starting_track;     /* Starting track number */
        u_short toc_alloc_length;       /* Allocation length */
        caddr_t toc_buffer;             /* Pointer to TOC buffer */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| toc_address_format | The address format, LBA or MSF. |
| toc_starting_track | The track number at which the audio play operation starts. |
| toc_alloc_length | The allocation length of the table of contents buffer in bytes |
| toc_buffer | A pointer to the TOC buffer. |

```
struct cd_toc_entry {
        u_char                  : 8;    /* Reserved */
        u_char  te_control      : 4;    /* Control field (attributes) */
        u_char  te_addr_type    : 4;    /* Address type information */
        u_char  te_track_number;        /* The track number */
        u_char                  : 8;    /* Reserved */
        union cd_address te_absaddr;    /* Absolute CD-ROM Address */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| te_control | The control field containing attributes. The possible settings follow: |

| Bit No. | Set to 0 (Zero) | Set to 1 |
|---|---|---|
| 0 | Audio without preemphasis | Audio with preemphasis |
| 1 | Digital copy prohibited | Digital copy permitted |
| 2 | Audio track | Data track |
| 3 | Two-channel audio | Four-channel audio |

| | |
|---|---|
| te_addr_type | Address-type information, MSF or LBA |
| te_track_number | The current track number that is being played. |
| te_absaddr | The absolute address of the audio track, MSF or LBA format. |

#### 11.2.3.1.8 Structures Used by the CDROM_READ_SUBCHANNEL Command –

The CDROM_READ_SUBCHANNEL command requests subchannel data and the state of audio play operations from the target device. This section describes the structure that is used by the CDROM_READ_SUBCHANNEL command. The structure is defined as follows:

```
/*
 * CD-ROM Sub-Channel Q Address Field Definitions.
 */
#define CDROM_NO_INFO_SUPPLIED  0x0     /* Information not supplied */
#define CDROM_CURRENT_POS_DATA  0x1     /* Encodes current position data */
#define CDROM_MEDIA_CATALOG_NUM 0x2     /* Encodes media catalog number */
#define CDROM_ENCODES_ISRC      0x3     /* Encodes ISRC */
                                        /* ISRC=International-Standard- */
                                        /*              Recording-Code */
/* Codes 0x4 through 0x7 are Reserved */

/*
 * CD-ROM Data Track Definitions
 */
#define CDROM_AUDIO_PREMPH      0x01    /* 0/1 = Without/With Pre-emphasis */
#define CDROM_COPY_PERMITTED    0x02    /* 0/1 = Copy Prohobited/Allowed */
#define CDROM_DATA_TRACK        0x04    /* 0 = Audio, 1 = Data track */
#define CDROM_FOUR_CHAN_AUDIO   0x10    /* 0 = 2 Channel, 1 = 4 Channel */

/*
 * Sub-Channel Data Format Codes
 */
#define CDROM_SUBQ_DATA         0x00    /* Sub-Channel data information */
#define CDROM_CURRENT_POSITION  0x01    /* Current position information */
#define CDROM_MEDIA_CATALOG     0x02    /* Media catalog number */
#define CDROM_ISRC              0x03    /* ISRC information */
                                        /* ISRC=International-Standard- */
                                        /*              Recording-Code */
/* Codes 0x4 through 0xEF are Reserved */
/* Codes 0xF0 through 0xFF are Vendor Specific */

/*
 * Audio Status Definitions returned by Read Sub-Channel Data Command
 */
#define AS_AUDIO_INVALID        0x00    /* Audio status not supported */
#define AS_PLAY_IN_PROGRESS     0x11    /* Audio play operation in prog */
#define AS_PLAY_PAUSED          0x12    /* Audio play operation paused */
#define AS_PLAY_COMPLETED       0x13    /* Audio play completed */
#define AS_PLAY_COMPLETED       0x13    /* Audio play completed */
#define AS_PLAY_ERROR           0x14    /* Audio play stopped by error */
#define AS_NO_STATUS            0x15    /* No current audio status */

struct cd_sub_channel {
        u_char  sch_address_format;     /* Address format to return */
        u_char  sch_data_format;        /* Sub-channel data format code */
        u_char  sch_track_number;       /* Track number */
        u_short sch_alloc_length;       /* Allocation length */
        caddr_t sch_buffer;             /* Pointer to SUBCHAN buffer */
```

```
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| sch_address_format | The address format, LBA or MSF. |
| sch_data_format | The type of subchannel data to be returned. |
| sch_track_number | The track from which ISRC data is read. |
| sch_alloc_length | The allocation length of the table of contents buffer in bytes |
| sch_buffer | A pointer to the SUBCHAN buffer defined by the sch_data_format member. |

```
struct cd_subc_position {
        u_char  scp_data_format;        /* Data Format code */
        u_char  scp_control     : 4;    /* Control field (attributes) */
        u_char  scp_addr_type   : 4;    /* Address type information */
        u_char  scp_track_number;       /* The track number */
        u_char  scp_index_number;       /* The index number */
        union cd_address scp_absaddr;   /* Absolute CD-ROM Address */
        union cd_address scp_reladdr;   /* Relative CD-ROM Address */
};

#define scp_absmsf scp_absaddr.msf
#define scp_abslba scp_absaddr.lba
#define scp_relmsf scp_reladdr.msf
#define scp_rellba scp_reladdr.lba
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| scp_data_format | Data format code. |
| scp_control | The control field containing attributes. The possible settings follow: |

| Bit No. | Set to 0 (Zero) | Set to 1 |
|---|---|---|
| 0 | Audio without preemphasis | Audio with preemphasis |
| 1 | Digital copy prohibited | Digital copy permitted |
| 2 | Audio track | Data track |
| 3 | Two-channel audio | Four-channel audio |

| | |
|---|---|
| scp_addr_type | Address-type information, MSF or LBA format. The address format, LBA or MSF. |
| scp_track_number | The current track number that is being played. |
| scp_index_number | The index number within an audio track. |

| | |
|---|---|
| scp_absaddr | The absolute address of the audio track, MSF or LBA format. |
| scp_reladdr | The CDROM address relative to the track being played. |

```
struct cd_subc_media_catalog {
        u_char  smc_data_format;        /* Data Format code */
        u_char                  : 8;    /* Reserved */
        u_char                  : 8;    /* Reserved */
        u_char                  : 8;    /* Reserved */
        u_char                  : 7,    /* Reserved */
                smc_mc_valid    : 1;    /* Media catalog valid 1 = True */
      u_char  smc_mc_number[15];      /* Media catalog number ASCII */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| smc_data_format | Data format code. |
| smc_mc_valid | Media catalog number is valid. |
| smc_mc_number | Media catalog number. |

```
struct cd_subc_isrc_data {
        u_char  sid_data_format;        /* Data Format code */
        u_char                  : 8;    /* Reserved */
        u_char  sid_track_number;       /* The track number */
        u_char                  : 8;    /* Reserved */
        u_char                  : 7,    /* Reserved */
                sid_tc_valid    : 1;    /* Track code valid, 1 = True */
        u_char  sid_tc_number[15];      /* International-Standard- */
                                        /*   Recording-Code (ASCII) */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| sid_data_format | Data format code. |
| sid_track_number | The current track number at which ISRC is located. |
| sid_tc_valid | The track code is valid. |
| sid_tc_number[15] | The track code number. |

```
struct cd_subc_header {
        u_char                  : 8;    /* Reserved */
        u_char  sh_audio_status;        /* Audio status */
        u_char  sh_data_len1;           /* Sub-Channel Data length MSB */
        u_char  sh_data_len0;           /* Sub-Channel Data length LSB */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| sh_audio_status | The audio status code. |
| sh_data_len1 | The subchannel data length for MSF format. |
| sh_data_len0 | The subchannel data length for LBA format. |

```
struct cd_subc_channel_data {
        struct cd_subc_header scd_header;
        struct cd_subc_position scd_position_data;
        struct cd_subc_media_catalog scd_media_catalog;
        struct cd_subc_isrc_data scd_isrc_data;
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| scd_header | The subchannel data header, which is four bytes. |
| scd_position_data | CDROM current-position data information. |
| scd_media_catalog | The Media Catalog Number data information. |
| scd_isrc_data | Track International-Standard-Recording-Code (ISRC) data information. |

```
struct cd_subc_information {
        struct cd_subc_header sci_header;
        union {
                struct cd_subc_channel_data sci_channel_data;
                struct cd_subc_position sci_position_data;
                struct cd_subc_media_catalog sci_media_catalog;
                struct cd_subc_isrc_data sci_isrc_data;
        } sci_data;
};

#define sci_scd         sci_data.sci_channel_data
#define sci_scp         sci_data.sci_position_data
#define sci_smc         sci_data.sci_media_catalog
#define sci_sid         sci_data.sci_isrc_data

#define CDROM_DATA_MODE_ZERO    0       /* All bytes zero */
#define CDROM_DATA_MODE_ONE     1       /* Data mode one format */
#define CDROM_DATA_MODE_TWO     2       /* Data mode two format */
/* Modes 0x03-0xFF are reserved. */
```

This structure is used to allocate data space. The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|

| Structure Member | Description |
|---|---|
| sci_channel_data | Space for channel data. |
| sci_position_data | Space for current position data. |
| sci_media_catalog | Space for Media Catalog data. |
| sci_isrc_data | Space for ISRC data. |

**11.2.3.1.9 Structures Used by the CDROM_READ_HEADER Command –** This section describes the structures that are used by the CDROM_READ_HEADER command. The structures are defined as follows:

```
struct cd_read_header {
        u_char  rh_address_format;      /* Address format to return */
        u_long  rh_lba;                 /* Logical block address */
      u_short rh_alloc_length;        /* Allocation length */
        caddr_t rh_buffer;              /* Pointer to header buffer */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| rh_address_format | The address format, LBA or MSF. |
| rh_lba | The logical block address for LBA format. |
| rh_alloc_length | The allocation length of the header buffer. |
| rh_buffer | A pointer to the header buffer. |

```
struct cd_read_header_data {
        u_char  rhd_data_mode;          /* CD-ROM data mode */
        u_char                  : 8;    /* Reserved */
        u_char                  : 8;    /* Reserved */
        u_char                  : 8;    /* Reserved */
        union cd_address rhd_absaddr;   /* Absolute CD-ROM address */
};

#define rhd_msf rhd_absaddr.msf
#define rhd_lba rhd_absaddr.lba
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| rhd_data_mode | The CDROM data mode type. |
| rhd_absaddr | The absolute address of the audio track, MSF or LBA format. |

#### 11.2.3.1.10 Structure Used by the CDROM_PLAY_TRACK Command –

This section describes the structure that is used by the CDROM_PLAY_TRACK command. The structure is defined as follows:

```
struct cd_play_track {
        u_char  pt_starting_track;      /* Starting track number */
        u_char  pt_starting_index;      /* Starting index value */
        u_char  pt_number_indexes;      /* Number of indexes */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| pt_starting_track | The track number at which the audio play operation starts. |
| pt_starting_index | The index number within the track at which the audio play operation starts. |
| pt_number_indexes | The number of index values in the audio encoding on CDROM media. |

#### 11.2.3.1.11 Structure Used by the CDROM_PLAYBACK_CONTROL and CDROM_PLAYBACK_STATUS Commands –

This section describes the structures that are used by the CDROM_PLAYBACK_CONTROL and CDROM_PLAYBACK_STATUS commands. The structures are defined as follows:

```
/*
 * Definitions for Playback Control/Playback Status Output Selection
Codes */
#define CDROM_MIN_VOLUME        0x0     /* Minimum volume level */
#define CDROM_MAX_VOLUME        0xFF    /* Maximum volume level */
#define CDROM_PORT_MUTED        0x0     /* Output port is muted */
#define CDROM_CHANNEL_0         0x1     /* Channel 0 to output port */
#define CDROM_CHANNEL_1         0x2     /* Channel 1 to output port */
#define CDROM_CHANNEL_0_1       0x3     /* Channel 0 & 1 to output port */

struct cd_playback {
        u_short pb_alloc_length;        /* Allocation length */
        caddr_t pb_buffer;              /* Pointer to playback buffer */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| pb_alloc_length | Allocation length of the playback buffer. |
| pb_buffer | A pointer to the playback buffer. |

#### 11.2.3.1.12 Structure Used by the CDROM_PLAYBACK_CONTROL Command –

This section describes the structure that is used by the CDROM_PLAYBACK_CONTROL command. The structure is defined as follows:

```
struct cd_playback_control {
        u_char  pc_reserved[10];        /* Reserved */
        u_char  pc_chan0_select : 4,    /* Channel 0 selection code */
                                : 4;    /* Reserved */
        u_char  pc_chan0_volume;        /* Channel 0 volume level */
        u_char  pc_chan1_select : 4,    /* Channel 1 selection code */
                                : 4;    /* Reserved */
        u_char  pc_chan1_volume;        /* Channel 1 volume level */
        u_char  pc_chan2_select : 4,    /* Channel 2 selection code */
                                : 4;    /* Reserved */
        u_char  pc_chan2_volume;        /* Channel 2 volume level */
        u_char  pc_chan3_select : 4,    /* Channel 3 selection code */
                                : 4;    /* Reserved */
        u_char  pc_chan3_volume;        /* Channel 3 volume level */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| pc_chan0_select | The selection code for Channel 0. The low four bits are reserved. |
| pc_chan0_volume | The volume level value for Channel 0. |
| pc_chan1_select | The selection code for Channel 1. The low four bits are reserved. |
| pc_chan1_volume | The volume level value for Channel 1. |
| pc_chan2_select | The selection code for Channel 2. The low four bits are reserved. |
| pc_chan2_volume | The volume level value for Channel 2. |
| pc_chan3_select | The selection code for Channel 3. The low four bits are reserved. |
| pc_chan3_volume | The volume level value for Channel 3. |

#### 11.2.3.1.13 Structure Used by the CDROM_PLAYBACK_STATUS Command –

This section describes the structure that is used by the CDROM_PLAYBACK_STATUS command. The structure is defined as follows:

```
/*
 * Audio status return by Playback Status Command.
 */
#define PS_PLAY_IN_PROGRESS     0x00    /* Audio Play Oper In Progess */
#define PS_PLAY_PAUSED          0x01    /* Audio Pause Oper In Progress */
#define PS_MUTING_ON            0x02    /* Audio Muting On */
#define PS_PLAY_COMPLETED       0x03    /* Audio Play Oper Completed */
#define PS_PLAY_ERROR           0x04    /* Error Occurred During Play */
#define PS_PLAY_NOT_REQUESTED   0x05    /* Audio Play Oper Not Requested */

/*
 * Data structure returned by Playback Status Command.
 */
struct cd_playback_status {
        u_char                  : 8;    /* Reserved */
```

```
        u_char  ps_lbamsf       : 1,    /* Address format 0/1 = LBA/MSF */
                                : 7;    /* Reserved */
        u_char  ps_data_len1;           /* Audio data length MSB */
        u_char  ps_data_len0;           /* Audio data length LSB */
        u_char  ps_audio_status;        /* Audio status */
        u_char  ps_control      : 4,    /* Control field (attributes) */
                                : 4;    /* Reserved */
        union cd_address ps_absaddr;    /* Absolute CD-ROM address */
        u_char  ps_chan0_select : 4,    /* Channel 0 selection code */
                                : 4;    /* Reserved */
        u_char  ps_chan0_volume;        /* Channel 0 volume level */
        u_char  ps_chan1_select : 4,    /* Channel 1 selection code */
                                : 4;    /* Reserved */
        u_char  ps_chan1_volume;        /* Channel 1 volume level */
        u_char  ps_chan2_select : 4,    /* Channel 2 selection code */
                                : 4;    /* Reserved */
        u_char  ps_chan2_volume;        /* Channel 2 volume level */
        u_char  ps_chan3_select : 4,    /* Channel 3 selection code */
                                : 4;    /* Reserved */
        u_char  ps_chan3_volume;        /* Channel 3 volume level */
};
```

The structure members and their descriptions follow:

| Structure Member | Description |
|---|---|
| ps_lbamsf | The address format: a 0 (zero) means LBA; a 1 means MSF. |
| ps_data_len1 | The audio data length if the address format is MSF. |
| ps_data_len0 | The audio data length if the address format is LBA. |
| ps_audio_status | The audio status |
| ps_control | The control field containing attributes. The possible settings follow: |

| Bit No. | Set to 0 (Zero) | Set to 1 |
|---|---|---|
| 0 | Audio without preemphasis | Audio with preemphasis |
| 1 | Digital copy prohibited | Digital copy permitted |
| 2 | Audio track | Data track |
| 3 | Two-channel audio | Four-channel audio |

The low four bits are reserved.

| | |
|---|---|
| ps_absaddr | The absolute address of the audio track, MSF or LBA format. |
| ps_chan0_select | The selection code for Channel 0. The low four bits are reserved. |
| ps_chan0_volume | The volume level setting for Channel 0. |
| ps_chan0_select | The selection code for Channel 0. The low four bits are reserved. |
| ps_chan1_volume | The volume level setting for Channel 1. |

| | |
|---|---|
| `ps_chan1_select` | The selection code for Channel 1. The low four bits are reserved. |
| `ps_chan2_volume` | The volume level setting for Channel 2. |
| `ps_chan2_select` | The selection code for Channel 2. The low four bits are reserved. |
| `ps_chan3_volume` | The volume level setting for Channel 3. |

## 11.3 Adding a Programmer-Defined SCSI/CAM Device

The procedure for installing device drivers described in *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* applies to adding SCSI/CAM peripheral device drivers to your system. Follow that procedure after completing the entries to the SCSI/CAM-specific structures described in this chapter and in Chapter 3.

# SCSI/CAM Special I/O Interface 12

This chapter describes the SCSI/CAM special I/O interface. The USCA software includes an interface developed to process special SCSI I/O control commands used by the existing Digital SCSI subsystem and to aid in porting new or existing SCSI device drivers from other vendors to the USCA.

Application programs issue I/O control commands using the `ioctl` system call to send special SCSI I/O commands to a peripheral device. The term ‘‘special’’ refers to commands that are not usually issued to the device through the standard driver entry points. SCSI device drivers usually require the special I/O control commands in addition to the standard `read` and `write` system calls. With the SCSI/CAM special I/O interface, SCSI/CAM peripheral driver writers do not need detailed knowledge of either the system-specific or the CAM-specific structures and routines used to issue a SCSI command to the CAM I/O subsystem.

## 12.1 Application Program Access

Application programs access the SCSI/CAM special I/O interface by making requests to peripheral drivers using the `ioctl` system call. This system call is processed by system kernel support routines that invoke the device driver’s I/O control command entry point in the character device switch table defined in the `machine/common/conf.c` file. The device driver’s I/O control routine accesses the special I/O interface using either the supplied SCSI/CAM peripheral common routine, `ccmn_DoSpecialCmd`, or a driver-specific routine. Figure 12-1 shows the flow of application program requests through the operating system to the SCSI/CAM special I/O interface and the CAM I/O subsystem.

**Figure 12-1: Application Program Flow Through SCSI/CAM Special I/O Interface**

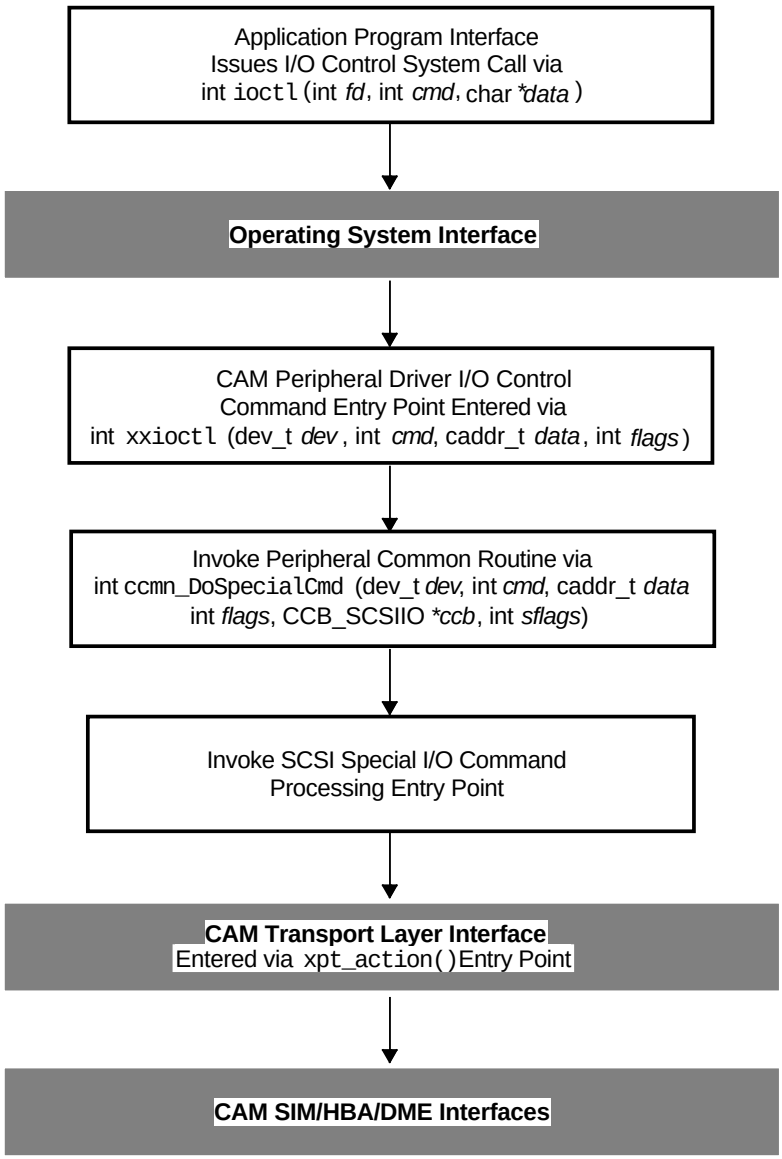


ZK−0264U−R

## 12.2 Device Driver Access

SCSI/CAM peripheral device drivers access the SCSI/CAM special I/O interface using either the supplied SCSI/CAM peripheral common routine, `ccmn_SysSpecialCmd`, or using a driver-specific routine. Figure 12-2 shows the flow of system requests from device drivers through the SCSI/CAM special I/O interface and the CAM I/O subsystem.

**Figure 12-2: Device Driver Flow Through SCSI/CAM Special I/O Interface**

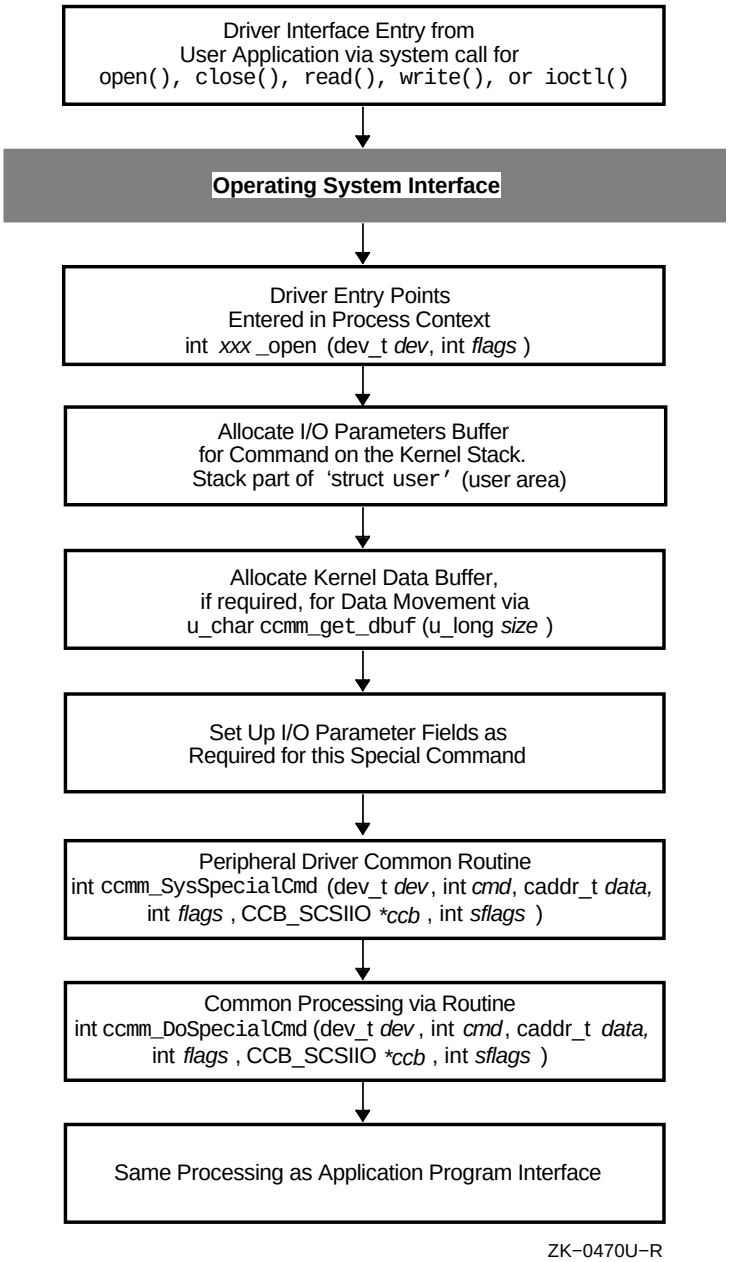


## 12.3 SCSI/CAM Special Command Tables

The SCSI/CAM special I/O interface includes default command tables that provide backwards compatibility with existing SCSI I/O control commands. The following predefined SCSI/CAM Special Command Tables are included:

- `cam_GenericCmds`

- cam_DirectCmds
- cam_AudioCmds
- cam_SequentialCmds
- cam_MtCmds

The interface also allows commands to be added to the existing command tables and new command tables to be added. The SCSI/CAM special I/O interface includes routines that manipulate the tables so programmers can write device drivers to easily add and remove command tables.

The command table header structure, SPECIAL_HEADER, provides a bit mask of device types that can be used with a command table. The Special Command Header Structure is defined as follows:

```
/*
 * Special Command Header Structure:
 */

typedef struct special_header {
    struct special_header *sph_flink;   /* Forward link to next table */
    struct special_header *sph_blink;   /* Backward link to prev table */
    struct special_cmd *sph_cmd_table;  /* Pointer to command table */
    u_long sph_device_type;             /* The device types supported */
    u_long sph_table_flags;             /* Flags to control cmd lookup */
    caddr_t sph_table_name;             /* Name of this command table */
} SPECIAL_HEADER;
```

### 12.3.1 The sph_flink and sph_blink Members

These are table-linkage members that allow command tables to be dynamically added or removed from the list of tables searched by the SCSI/CAM special I/O interface when processing commands.

### 12.3.2 The sph_cmd_table Member

A pointer to the Special Command Entry Structure.

### 12.3.3 The sph_device_type Member

The device types supported by this SCSI/CAM Special Command Table.

### 12.3.4 The sph_table_flags Member

The SPH_SUB_COMMAND, which indicates that the command table contains subcommands.

### 12.3.5 The sph_table_name Member

The name of this SCSI/CAM Special Command Table.

## 12.4 SCSI/CAM Special Command Table Entries

Each SCSI/CAM Special Command Table contains multiple entries. Each entry provides enough information to process the command associated with that entry. The command tables can be dynamically added, but the entries within the command tables are not dynamic. Each command table's entries are statically defined so that individual entries cannot be appended to the table. The Special Command Entry Structure structure is defined as follows:

```
/*
 * Special Command Entry Structure:
 */
typedef struct special_cmd {
        int     spc_ioctl_cmd;          /* The I/O control command code */
        int     spc_sub_command;        /* The I/O control sub-command */
        u_char  spc_cmd_flags;          /* The special command flags */
        u_char  spc_cmd_code;           /* The special command code */
        u_short                 : 16;   /* Unused ... align next field */
        u_long  spc_device_type;        /* The device types supported */
        u_long  spc_cmd_parameter;      /* Command parameter (if any) */
        u_long  spc_cam_flags;          /* The CAM flags field for CCB */
        u_long  spc_file_flags;         /* File control flags (fcntl) */
        int     spc_data_length;        /* Kernel data buffer length */
        int     spc_timeout;            /* Timeout for this command */
        int     (*spc_docmd)();         /* Function to do the command */
        int     (*spc_mkcdb)();         /* Function to make SCSI CDB */
        int     (*spc_setup)();         /* Setup parameters routine */
        caddr_t spc_cdbp;               /* Pointer to prototype CDB */
        caddr_t spc_cmdp;               /* Pointer to the command name */
} SPECIAL_CMD;
```

### 12.4.1 The spc_ioctl_cmd and spc_sub_command Members

These members contain the SCSI I/O control command code and subcommand used to locate the appropriate table entry. The subcommand is checked only if flags are set that indicate a subcommand exists.

### 12.4.2 The spc_cmd_flags Member

This member contains flags to control the action of the SCSI/CAM special I/O interface routines. The flag definitions are described in the following table:

| Flag Name | Description |
|---|---|
| SPC_SUSER | Restricted to superuser. |
| SPC_COPYIN | User buffer to copy from. |
| SPC_COPYOUT | User buffer to copy to. |
| SPC_NOINTR | Do not allow sleep interrupts. |
| SPC_DATA_IN | Data direction is from device. |
| SPC_DATA_OUT | Data direction is to device. |
| SPC_DATA_NONE | No data movement for command. |
| SPC_SUB_COMMAND | Entry contains subcommand. |
| SPC_INOUT | Copy in and out. |
| SPC_DATA_INOUT | Copy data in and out. |

### 12.4.3 The spc_command_code Member

This member contains the special SCSI opcode used to execute this command. This member is used during the creation of the CDB.

### 12.4.4 The spc_device_type Member

This member defines the specific device types with which this command is used. For example, direct-access and readonly direct-access devices share many of the same commands. Therefore, rather than duplicating command table entries, both device types can use the same command table. The values that are valid for this member are those defined in the Inquiry data device type member of the `inquiry_info` structure, which is defined in the `/usr/sys/h/scsi_all.h` file.

### 12.4.5 The spc_cmd_parameter Member

This member is used to define any special parameters used by the command. For example, the SCSI START CDB command, which is defined in the `/usr/sys/h/scsi_direct.h` file, is used for stopping, starting, and ejecting a CDROM caddy. The parameter member can be defined as the subcommand code so a common routine can be used to create the CDB.

### 12.4.6 The spc_cam_flags Member

This member contains the CAM flags necessary for processing the command. The CAM flags are defined in the file `/usr/sys/h/cam.h`.

### 12.4.7 The spc_file_flags Member

This member contains the file access bits required for accessing the command. For example, the command can be restricted to device files opened for read and write access. The file flags are defined in the file `/usr/sys/h/file.h`.

### 12.4.8 The spc_data_length Member

This member describes the length of the buffer to hold additional kernel data that is required to process the command. Usually, this member is set to 0 (zero), since the data buffer lengths are normally decoded from the I/O command code or taken from a member in the I/O parameter buffer.

### 12.4.9 The spc_timeout Member

This member defines the default timeout for this command. This value is used for the SCSI I/O CCB timeout member, unless it is overridden by the timeout member in the Special I/O Argument Structure.

### 12.4.10 The spc_docmd Member

This member specifies the routine to invoke to execute the command. A routine is required by I/O commands that need special servicing. For example, if the I/O command does not return all the data read by the SCSI command, then a routine is needed to handle this special servicing.

### 12.4.11 The spc_mkcdb Member

This member specifies the routine that is invoked to create the CDB for the command. A routine is not necessary for simple commands, such as TEST UNIT READY. However, any command that requires additional members to be set up in the CDB prior to issuing the SCSI command must define this routine.

### 12.4.12 The spc_setup Member

This member is required by any command that has special setup requirements. For example, commands that pass a user buffer and length as part of the I/O parameters buffer structure must have a setup routine to copy these members to the Special I/O Argument Structure. This applies to all previously defined commands, but does not apply to commands implemented using the new SCSI_SPECIAL I/O control command code.

### 12.4.13 The spc_cdbp Member

This member is used by commands that can be implemented using a prototype CDB. A prototype CDB is a SCSI command that can be implemented using a statically defined SCSI CDB. Fields within the CDB do not change. Usually, simple SCSI commands, such as SCSI_START_UNIT, can be implemented with a prototype CDB so that the make CDB routine is not required.

### 12.4.14 The spc_cmdp Member

This member points to a string that describes the name of the command. This string is used during error reporting and during debugging.

### 12.4.15 Sample SCSI/CAM Special Command Table

The example that follows shows a sample SCSI/CAM Special Command Table with one entry defined:

```
#include "../h/cdrom.h"
#include "../h/mtio.h"
#include "../h/rzdisk.h"

#include "../h/cam.h"
#include "../h/cam_special.h"
#include "../h/dec_cam.h"
#include "../h/scsi_all.h"
#include "../h/scsi_direct.h"
#include "../h/scsi_rodirect.h"
#include "../h/scsi_sequential.h"
#include "../h/scsi_special.h"

extern int scmn_MakeFormatUnit(), scmn_SetupFormatUnit();

/*
 * Command Header for Direct-Access Command Table:
 */
struct special_header cam_DirectCmdsHdr = {
        (struct special_header *) 0,            /* sph_flink */
        (struct special_header *) 0,            /* sph_blink */
        cam_DirectCmds,                         /* sph_cmd_table */
        (BM(DTYPE_DIRECT) | BM(DTYPE_RODIRECT)),/* sph_device_type */
        0,                                      /* sph_table_flags */
        "Direct Access Commands"                /* sph_table_name */
};
```

```
/*************************************************************************
 *                                                                       *
 *                  Special Direct Access Command Table                  *
 *                                                                       *
 *************************************************************************/
struct special_cmd cam_DirectCmds[] = {
    {   SCSI_FORMAT_UNIT,                       /* spc_ioctl_cmd */
        0,                                      /* spc_sub_command */
        (SPC_COPYIN | SPC_DATA_OUT),            /* spc_cmd_flags */
        DIR_FORMAT_OP,                          /* spc_cmd_code */
        BM(DTYPE_DIRECT),                       /* spc_device_type */
        0,                                      /* spc_cmd_parameter */
        CAM_DIR_OUT,                            /* spc_cam_flags */
        FWRITE,                                 /* spc_file_flags */
        -1,                                     /* spc_data_length */
        (60 * ONE_MINUTE),                      /* spc_timeout */
        (int (*)()) 0,                          /* spc_docmd */
        scmn_MakeFormatUnit,                    /* spc_mkcdb */
        scmn_SetupFormatUnit,                   /* spc_setup */
        (caddr_t) 0,                            /* spc_cdbp */
        "format unit"                           /* spc_cmdp */
    },
        .
        .
        .
    { END_OF_CMD_TABLE }  /* End of cam_DirectCmds[] Table. */
};
/*
 * Define Special Commands Header & Table for Initialization Routine.
 */
struct special_header *cam_SpecialCmds = &cam_SpecialCmdsHdr;
struct special_header *cam_SpecialHdrs[] =
        { &cam_GenericCmdsHdr, &cam_DirectCmdsHdr, &cam_AudioCmdsHdr,
          &cam_SequentialCmdsHdr, &cam_MtCmdsHdr, 0 };
```

## 12.5 SCSI/CAM Special I/O Argument Structure

A Special I/O Argument Structure is passed to the SCSI/CAM special I/O interface to control processing of the I/O control command being executed. The structure members provide information to process a special command for different SCSI subsystems. Default settings and routines invoked by the SCSI/CAM special I/O interface can be overridden by the calling routine. Table 12-1 shows the members that are mandatory for the calling routine to set up, the members that are optional, and the members that are used or filled in by the SCSI/CAM special I/O interface:

**Table 12-1: SCSI/CAM Special I/O Argument Structure**

| Member Name | Type | Description |
|---|---|---|
| `u_long sa_flags;` | M | Flags to control command |
| `dev_t sa_dev;` | M | Device major/minor number |
| `u_char sa_unit;` | U | Device logical unit number |
| `u_char sa_bus;` | M | SCSI host adapter bus number |
| `u_char sa_target;` | M | SCSI device target number |
| `u_char sa_lun;` | M | SCSI logical unit number |
| `int sa_ioctl_cmd;` | M | The I/O control command |

**Table 12-1: (continued)**

| Member Name | Type | Description |
|---|---|---|
| `int sa_ioctl_scmd;` | C | The subcommand, if any |
| `caddr_t sa_ioctl_data;` | C | The command data pointer |
| `caddr_t sa_device_name;` | M | Pointer to the device name |
| `int sa_device_type;` | M | The peripheral device type |
| `int sa_iop_length;` | I | Parameters' buffer length |
| `caddr_t sa_iop_buffer;` | I | Parameters' buffer address |
| `int sa_file_flags;` | M | The file control flags |
| `int sa_sense_length;` | O | Sense data buffer length |
| `u_char sa_sense_resid;` | I | Sense data residual count |
| `caddr_t sa_sense_buffer;` | O | Sense data buffer address |
| `int sa_user_length;` | I | User data buffer length |
| `caddr_t sa_user_buffer;` | I | User data buffer address |
| `struct buf *sa_bp;` | O | Kernel I/O request buffer |
| `CCB_SCSIIO *sa_ccb;` | O | CAM control block buffer |
| `struct special_cmd *sa_spc;` | I | Special command table entry |
| `struct special_header *sa_sph;` | O | Special command table header |
| `u_long sa_cmd_parameter;` | I | Command parameter, if any |
| `int (*sa_error)();` | O | The error report routine |
| `int (*sa_start)();` | O | The driver start routine |
| `int sa_data_length;` | I | Kernel data buffer length |
| `caddr_t sa_data_buffer;` | I | Kernel data buffer address |
| `caddr_t sa_cdb_pointer;` | I | Pointer to the CDB buffer |
| `u_char sa_cdb_length;` | I | Length of the CDB buffer |
| `u_char sa_cmd_flags;` | I | The special command flags |
| `u_char sa_retry_count;` | I | The current retry count |
| `u_char sa_retry_limit;` | O | Times to retry this command |
| `int sa_timeout;` | O | Timeout for this command |
| `int sa_xfer_resid;` | I | Transfer residual count |
| `caddr_t sa_specific;` | O | Driver-specific information |

Legend: M = Mandatory. Must be set up by the caller.
C = Command Dependent. Depends on special command.
O = Optional. Optionally overrides defaults.
I = Interface. Used or filled in by SCSI/CAM special I/O interface.
U = Unused. Not used by SCSI/CAM special I/O interface.

Several of the members marked as mandatory in Table 12-1 are set up initially by the routine that allocates the Special I/O Argument Structure. The following members are initialized by the allocation routine: `sa_bus`; `sa_target`; `sa_lun`; `sa_unit` (same as target); `sa_retry_limit` (set to 30); and `sa_start` (set to `xpt_action`).

Fields that are identified as optional in Table 12-1 can be defined by the caller to override some of the defaults used by the SCSI/CAM special I/O interface. The following table describes the defaults used by the SCSI/CAM special I/O interface:

| Member Name | Default |
|---|---|
| sa_sense_length | Set to DEC_AUTO_SENSE_SIZE, which is defined in /usr/sys/h/dec_cam.h. |
| sa_sense_buffer | Sense buffer in SCSI/CAM Peripheral Device Driver Working Set Structure. |
| sa_bp | Allocated as needed for data movement commands. |
| sa_ccb | Allocated by the CAM xpt_ccb_alloc routine. |
| sa_error() | Special interface error report routine. |
| sa_start() | Uses the CAM xpt_action routine. |
| sa_timeout | Uses the timeout value from the SCSI/CAM Special Command Table entry. |
| sa_specific | Is not set up or used by SCSI/CAM special I/O interface. |

### 12.5.1 The sa_flags Member

This member is used to control the actions of the SCSI/CAM special I/O interface. The low order five bits of this member can be set by the calling routine. All other bits in this member are reserved. The table that follows shows the control flags that can be set by the calling routine:

| Flag Name | Description |
|---|---|
| SA_NO_ERROR_RECOVERY | Do not perform error recovery. |
| SA_NO_ERROR_LOGGING | Do not log error messages. |
| SA_NO_SLEEP_INTR | Do not allow sleep interrupts. |
| SA_NO_SIMQ_THAW | Leave SIM queue frozen on errors. |
| SA_NO_WAIT_FOR_IO | Do not wait for I/O to complete. |

### 12.5.2 The sa_dev Member

This member contains the device major/minor number pair passed into the device driver routines. It is used to fill in the bp_dev member of the system I/O request member.

### 12.5.3 The sa_unit, sa_bus, sa_target, and sa_lun Members

These members are used to address the SCSI device to which the command is being sent. The `sa_unit` member is not used, but has been included for device drivers that implement logical device mapping.

### 12.5.4 The sa_ioctl_cmd Member

This member contains the I/O control command to be processed. This command usually maps directly to a SCSI I/O Command, but that is not necessary. For example, the Digital-specific SCSI_GET_SENSE command returns the sense data from the last failing command. A REQUEST SENSE command is not issued to the device, because autosense is assumed to have been enabled on the failing command, and the sense data is part of the common Peripheral Device Structure.

### 12.5.5 The sa_ioctl_scmd Member

This member must be filled in for special commands implemented with a subcommand code. For example, magnetic tape I/O control commands have both an I/O control command code and a subroutine command code.

### 12.5.6 The sa_ioctl_data Member

An I/O parameters buffer is required if the I/O control command transfers data to and from the kernel. If the request came from an application program, this buffer is normally passed into the driver `ioctl` routine.

### 12.5.7 The sa_device_name Member

This member contains a pointer to the device name string that is used when reporting device errors.

### 12.5.8 The sa_device_type Member

This member contains the device type member from the Inquiry data. This member controls the SCSI/CAM Special Command Tables and the entries within each command table that are searched for the SCSI/CAM special I/O command being issued.

### 12.5.9 The sa_iop_length and sa_iop_buffer Members

These members are used internally by the SCSI/CAM special I/O interface when processing a command. If I/O would normally be performed directly to the I/O parameters buffer because no other buffer was set up, then a kernel buffer is allocated and set up in these members.

### 12.5.10 The sa_file_flags Member

This member contains the file flags passed into the device driver routines. The flags describe access control bits associated with the device. The file access flags are defined in the `/usr/sys/h/file.h` file.

### 12.5.11 The sa_sense_length and sa_sense_buffer Members

These members set up the sense buffer and expected sense data length that are used by autosense when device errors occur. If these members are not set up by the calling routine, then the SCSI/CAM special I/O interface uses the sense buffer allocated in the SCSI/CAM Peripheral Device Driver Working Set Structure that is pointed to by the SCSI I/O CCB.

### 12.5.12 The sa_user_length and sa_user_buffer Members

These members are set up by command setup routines to describe the user buffer and user data length required by a command. Requests from application programs that pass a user buffer and length in the I/O parameter buffers require a setup routine to copy this information into those members . The SCSI/CAM special I/O interface checks access and locking on this address range and sets up the address and length in the SCSI I/O CCB for the command.

### 12.5.13 The sa_bp Member

This member contains a pointer to a system I/O request buffer for commands that perform data movement directly to user address space. A system buffer is not required if a kernel data buffer is used for I/O. If the calling routine does not pass a previously allocated request buffer in this member, and the SCSI/CAM special I/O interface determines that the I/O requires one based on the I/O buffer address, then a request buffer is allocated and deallocated automatically by the SCSI/CAM special I/O interface.

### 12.5.14 The sa_ccb Member

This member contains a pointer to the SCSI I/O CCB for a command. If the calling routine does not specify a SCSI I/O CCB in this member, then the SCSI/CAM special I/O interface automatically allocates and deallocates a SCSI I/O CCB for the command.

### 12.5.15 The special_cmd Member

This member is used internally by the SCSI/CAM special I/O interface to save the SPECIAL_CMD after a command is located.

### 12.5.16 The special_header Member

This member can be used by the calling routine to specify the SCSI/CAM Special Command Table to search for the special command. This lets device drivers restrict the SCSI/CAM Special Command Tables that are searched. If this member is not used, then all the SCSI/CAM Special Command Tables in the list are searched for an entry that matches the special command being processed.

### 12.5.17 The sa_cmd_parameter Member

This member is used to store the command parameter, if any, from the command entry associated with this special command. This member is used by special support routines when setting up members for a particular CDB.

### 12.5.18 The sa_error Member

This member contains the routine to be invoked when an error condition is detected. If not specified, a SCSI/CAM special I/O interface support routine handles the error condition. Otherwise, the routine is called as follows:

```
status = (*sap->sa_error)(ccb, sense);
```

This member can be specified for drivers requiring specialized error handling and for specific error logging. The SCSI/CAM special I/O interface's error logging uses the `mprintf` facility to report errors. Both sense key and CAM status members are logged.

### 12.5.19 The sa_start Member

This member contains the routine that starts processing the SCSI I/O CCB. If not specified, the CAM `xpt_action` routine is used. The routine is invoked as follows:

```
(void) ((sap->sa_start)(ccb);
```

### 12.5.20 The sa_data_length and sa_data_buffer Members

These members are used internally by the SCSI/CAM special I/O interface to store the address and length of an additional kernel buffer required for a command. These members are usually initialized by the resulting value of the Special Command Entry Structure member, `spc_data_length`, but can be used by SCSI/CAM special I/O command developers if needed.

### 12.5.21 The sa_cdb_pointer Member

This member is used internally by the SCSI/CAM special I/O interface to save a pointer to the CDB for this special command. This member may point to a prototype CDB; to a driver-allocated CDB buffer, if the CAM_CDB_POINTER flag is set in CCB header; or to the CDB buffer allocated within the SCSI I/O CCB. This member is set up with the CDB buffer address before the Special Command Header Structure make CDB routine is invoked as follows:

```
status = (*spc->spc_mkcdb)(sap, cdbp);
```

### 12.5.22 The sa_cdb_length Member

This member is used to specifiy the size in bytes of the CDB required by a SCSI command. If the Special Command Header Structure make CDB routine does not set up this member, then the SCSI Group Code is decoded to determine the length.

### 12.5.23 The sa_cmd_flags Member

This member is initialized from the Special Command Header Structure `spc_cmd_flags` member so SCSI/CAM special I/O command support routines have easy and quick access to the flags.

### 12.5.24 The sa_retry_count Member

This member contains the number of retrys that were required to successfully complete the request. It is filled in by the SCSI/CAM special I/O interface after processing the command.

### 12.5.25 The sa_retry_limit Member

This member contains the maximum number of times a command is retried. The only retries automatically handled by the SCSI/CAM special I/O interface are a sense key of Unit Attention, or a SCSI bus status of Bus Busy or Reservation Conflict. All other error conditions must be handled by the calling routine.

### 12.5.26 The sa_timeout Member

This member contains the timeout value, in seconds, to use with the command being processed. This member can be specified by the calling routine. If it is not specified, the timeout value is taken from the Special Command Entry Structure. This member is used to initialize the `cam_timeout` member of the SCSI I/O CCB before issuing the command.

### 12.5.27 The sa_xfer_resid Member

This member contains the residual byte count of data movement commands. This member is copied from the `cam_resid` member of the SCSI I/O CCB before returning to the caller.

### 12.5.28 The sa_specific Member

This member is not set up or used by the SCSI/CAM special I/O interface. It provides a mechanism for device driver code to pass driver-dependant information to SCSI/CAM special I/O command support routines. The SCSI/CAM peripheral driver common routine `ccmn_DoSpecialCmd` passes the pointer to the Peripheral Device Structure in this member.

### 12.5.29 Sample Function to Create a CDB

The following sample function illustrates how to use the SCSI/CAM special I/O interface to create a CDB for a SCSI FORMAT_UNIT command:

```
/*****************************************************************
 *                                                               *
 * scmn_MakeFormatUnit() - Make Format Unit Command Descriptor Block.*
 *                                                               *
 * Inputs:      sap = Special command argument block pointer.    *
 *              cdbp = Pointer to command descriptor block.      *
 *                                                               *
 * Return Value:                                                 *
 *              Returns 0 for SUCCESS, or error code on failures.*
 *                                                               *
 *****************************************************************/
int
scmn_MakeFormatUnit (sap, cdbp)
register struct special_args *sap; 1
register struct dir_format_cdb6 *cdbp; 2
{
        register struct special_cmd *spc = sap->sa_spc; 3
```

```
        register struct format_params *fp; 4

        fp = (struct format_params *) sap->sa_iop_buffer;
        cdbp->opcode = (u_char) spc->spc_cmd_code;
        if (fp->fp_defects == VENDOR_DEFECTS) { 5
            cdbp->fmt_data = 1;
            cdbp->cmp_list = 1;
        } else if (fp->fp_defects == KNOWN_DEFECTS) {
            cdbp->fmt_data = 1;
            cdbp->cmp_list = 0;
        } else if (fp->fp_defects == NO_DEFECTS) {
            cdbp->fmt_data = 0;
            cdbp->cmp_list = 0;
        }
        cdbp->defect_list_fmt = fp->fp_format; 6
        cdbp->vendor_specific = fp->fp_pattern;
        cdbp->interleave1 = 0;
        cdbp->interleave0 = fp->fp_interleave;
        return (SUCCESS);
}
```

1 This line declares a register structure pointer to a Special I/O Argument Structure that controls processing of the I/O command. The Special I/O Argument Structure is defined in the `/usr/sys/h/cam_special.h` file.

2 This line declares a register structure pointer to a structure containing the format for a 6-byte CDB. The structure is defined in the `/usr/sys/h/scsi_direct.h` file.

3 This line declares a register structure pointer to a Special I/O Control Commands Structure that saves the SPECIAL_CMD after it is located in the `sa_spc` member of the Special I/O Argument Structure. The Special I/O Control Commands Structure is defined in the `/usr/sys/h/cam_special.h` file.

4 This line declares a register structure pointer to a structure containing the format parameters for a SCSI FORMAT UNIT command. The structure is defined in the `/usr/sys/h/rzdisk.h` file.

5 This section tests the contents of the `fp_defects` member of the format parameters structure to determine the contents of the `fmt_data` and `cmp_list` members of the `dir_format_cdb6` structure.

6 This section assigns the contents of the `dir_format_cdb6` members to the equivalent members of the `format_params` structure.

### 12.5.30 Sample Function to Set Up Parameters

The following sample function illustrates how to use the SCSI/CAM special I/O interface to set up parameters for a SCSI FORMAT_UNIT command:

```
/*****************************************************************************
 *                                                                           *
 * scmn_SetupFormatUnit() - Set up Format Unit Parameters.                   *
 *                                                                           *
 * Inputs:      sap = Special command argument block pointer.                *
 *              data = The address of input/output arguments.                *
 *                                                                           *
 * Return Value:                                                             *
 *              Returns 0 for SUCCESS, or error code on failures.            *
 *                                                                           *
 *****************************************************************************/
int
```

```
scmn_SetupFormatUnit (sap, data)
register struct special_args *sap; 1
caddr_t data;
{
        struct form2_defect_list_header defect_header; 2
        register struct form2_defect_list_header *ddh = &defect_header;
        register struct format_params *fp;  3

        fp = (struct format_params *) data;
        sap->sa_user_buffer = (caddr_t) fp->fp_addr; 4

        /*
         * For diskettes, there are no defect lists.
         */
        if ( ((sap->sa_user_length = fp->fp_length) == 0) &&
             (fp->fp_defects == NO_DEFECTS) ) {
            sap->sa_cmd_flags &= ~(SPC_INOUT | SPC_DATA_INOUT);
            return (SUCCESS);
        }

        /*
         * Ensure the defect list address is valid (user address).
         */
        if ( ((sap->sa_flags & SA_SYSTEM_REQUEST) == 0) &&
                !IS_KUSEG(fp->fp_addr) ) {
            return (EINVAL);
        }

        /*
         * The format parameters structure is not set up with the length
         * of the defect lists as it should be.  Therefore, we must copy
         * in the defect list header then calculate the defect list length.
         */
        if (copyin ((caddr_t)fp->fp_addr, (caddr_t)ddh, sizeof(*ddh)) != 0) {
            return (EFAULT);
        }
        sap->sa_user_length = (int) (  (ddh->defect_len1 << 8) +
                                        ddh->defect_len0 + sizeof(*ddh) );

        return (SUCCESS);
}
```

1 This line declares a register structure pointer to a Special I/O Argument Structure that controls processing of the I/O command. The Special I/O Argument Structure is defined in the `/usr/sys/h/cam_special.h` file.

2 This line declares a structure pointer to a structure containing the format defect list header for a SCSI FORMAT UNIT command. The structure is defined in the `/usr/sys/h/rzdisk.h` file.

3 This line declares a register structure pointer to a structure containing the format parameters for a SCSI FORMAT UNIT command. The structure is defined in the `/usr/sys/h/rzdisk.h` file.

4 This line assigns the user buffer data address to the defect list address.

## 12.6 SCSI/CAM Special I/O Control Command

A SCSI/CAM special I/O control command has been defined to provide a single standard method of implementing new SCSI/CAM special I/O commands. A subcommand member is used to determine the specific SCSI command being issued.

The SCSI/CAM special I/O control command structure can be used both in porting applications using existing SCSI I/O control commands and in implementing new SCSI commands. Applications can be modified to use this structure to gain control over subsystem processing. For example, the SCSI/CAM special I/O command flags can be set to control error recovery and error reporting; sense data can be returned automatically by specifying a sense buffer address and length; and the command timeout and retry limit can be specified.

A member in the Special I/O Control Commands Structure must be initialized to zero if a default value is desired. A nonzero member is used to override the default value.

The SCSI I/O control command and its associated structure and definitions are included in the file `/usr/sys/h/scsi_special.h`. The `scsi_special` structure is defined as follows:

```
/*
 * Structure for Processing Special I/O Control Commands.
 */
struct scsi_special {
        u_long  sp_flags;               /* The special command flags */
        dev_t   sp_dev;                 /* Device major/minor number */
        u_char  sp_unit;                /* Device logical unit number */
        u_char  sp_bus;                 /* SCSI host adapter bus number */
        u_char  sp_target;              /* SCSI device target number */
        u_char  sp_lun;                 /* SCSI logical unit number */
        int     sp_sub_command;         /* The subcommand */
        u_long  sp_cmd_parameter;       /* Command parameter (if any) */
        int     sp_iop_length;          /* Parameters buffer length */
        caddr_t sp_iop_buffer;          /* Parameters buffer address */
        u_char  sp_sense_length;        /* Sense data buffer length */
        u_char  sp_sense_resid;         /* Sense data residual count */
        caddr_t sp_sense_buffer;        /* Sense data buffer address */
        int     sp_user_length;         /* User data buffer length */
        caddr_t sp_user_buffer;         /* User data buffer address */
        int     sp_timeout;             /* Timeout for this command */
        u_char  sp_retry_count;         /* Retrys performed on command */
        u_char  sp_retry_limit;         /* Times to retry this command */
        int     sp_xfer_resid;          /* Transfer residual count */
};
```

This structure is used with the following SCSI Special I/O Control Command:

```
#define SCSI_SPECIAL     _IOWR('p', 100, struct scsi_special)
```

### 12.6.1 The sp_flags Member

This member controls the actions of the SCSI/CAM special I/O interface. The low order three bits can be set by the calling routine. The other bits are reserved for use by SCSI/CAM peripheral drivers and the SCSI/CAM special I/O interface routines. The bits that can be set by the calling routine are described as follows:

| Flag Name | Description |
|---|---|
| SA_NO_ERROR_RECOVERY | Do not perform error recovery. |
| SA_NO_ERROR_LOGGING | Do not log error messages. |
| SA_NO_SLEEP_INTR | Do not allow sleep interrupts. |

### 12.6.2 The sp_dev, sp_unit, sp_bus, sp_target, and sp_lun Members

These members pass the device major/minor number pair and the device bus, target, LUN, and unit information to the SCSI/CAM special I/O interface when the I/O control command is not being issued to a SCSI/CAM peripheral device driver. These members provide the necessary hooks to allow software pseudodevice drivers, such as the User Agent driver, to send requests to the SCSI/CAM special I/O interface.

### 12.6.3 The sp_sub_command Member

This member contains the SCSI/CAM special I/O subcommand code of the SCSI command to execute. This member can also be defined as an I/O control command to support backwards compatibility with preexisting SCSI I/O control commands. The SCSI/CAM special I/O interface detects an I/O control command, as opposed to a subcommand code, and coerces the arguments into the appropriate format for processing by the support routines associated with that I/O control command. The predefined subcommand codes are listed in the file `/usr/sys/h/scsi_special.h`.

### 12.6.4 The sp_cmd_parameter Member

This member contains the command parameter, if any, for the SCSI special I/O command being issued. This parameter is specific to the special command processing routines and is not used directly by the SCSI/CAM special I/O interface routines.

### 12.6.5 The sp_iop_length and sp_iop_buffer Members

These members contain the I/O parameters buffer and length for those commands that require additional parameters. These members are used by the special command processing routines to obtain and set up additional information prior to issuing the SCSI command. For example, the SCSI FORMAT_UNIT I/O control command passes a `format_params` structure that describes the format, length, pattern, and interleave information for the defect list. This information is used by the `scmn_MakeFormatUnit` support routine when creating the CDB for this command.

### 12.6.6 The sp_sense_length, sp_sense_resid, and sp_sense_buffer Members

These members contain the buffer, length, and residual byte count for the sense data that is returned when device errors occur. If these members are specified, then the last sense data is saved in the Peripheral Device Structure from which it can be obtained by the Digital-specific SCSI_GET_SENSE I/O control command.

### 12.6.7 The sp_user_length and sp_user_buffer Members

These members contain the user buffer and length for those commands that require them. The SCSI/CAM special I/O interface performs verification, locking, and unlocking of the user pages when processing the command.

### 12.6.8 The sp_timeout Member

This member can be specified to override the default timeout, in seconds, which is usually taken from the Special Command Entry Structure.

### 12.6.9 The sp_retry_count Member

This member contains the number of retrys that were required to successfully complete the request. It is filled in by the SCSI/CAM special I/O interface after processing the command.

### 12.6.10 The sp_retry_limit Member

This member contains the maximum number of times a command is retried. The only retries automatically handled by the SCSI/CAM special I/O interface are a sense key of Unit Attention, or a SCSI bus status of Bus Busy or Reservation Conflict. All other error conditions must be handled by the calling routine.

### 12.6.11 The sp_xfer_resid Member

This member is filled in with the transfer residual byte count when a command completes. The SCSI/CAM special I/O interface copies the `cam_resid` member of the SCSI I/O CCB to this member before completing the request.

### 12.6.12 Sample Function to Create an I/O Control Command

The following sample function illustrates how to use the SCSI/CAM special I/O interface to create an I/O control command:

```
/*****************************************************************
 *                                                               *
 * DoIoctl()    Do An I/O Control Command.                       *
 *                                                               *
 * Description:                                                  *
 *      This routine issues the specified I/O control command to the
*
 * file descriptor associated with the CD-ROM device driver.     *
 *                                                               *
 * Inputs:      cmd = The I/O control command.                   *
 *              argp = The command argument to pass.             *
 *              msgp = The message to display on errors.         *
 *                                                               *
 * Return Value:                                                 *
 *              Returns 0 / -1 = SUCCESS / FAILURE.              *
 *                                                               *
 *****************************************************************/
int
DoIoctl (cmd, argp, msgp)
int cmd;
caddr_t argp;
caddr_t msgp;
{
        int status;
#if defined(CAM)
        struct scsi_special special_cmd; 1
        register struct scsi_special *sp = &special_cmd;
        register struct extended_sense *es; 2

        es = (struct extended_sense *)SenseBufPtr;
```

```
        bzero ((char *) sp, sizeof(*sp));
        bzero ((char *) es, sizeof(*es));
        sp->sp_sub_command = cmd; 3
        sp->sp_sense_length = sizeof(*es);
        sp->sp_sense_buffer = (caddr_t) es;
        sp->sp_iop_length = ((cmd & ~(_IOC_INOUT|_IOC_VOID)) >> 16);
        sp->sp_iop_buffer = argp;
        if ((status = ioctl (CdrFd, SCSI_SPECIAL, sp)) < 0) { 4
            perror (msgp);
            if (es->snskey) {
                cdbg_DumpSenseData (es);
            }
        }
#else /* !defined(CAM) */
        if ((status = ioctl (CdrFd, cmd, argp)) < 0) {
                perror (msgp);
        }
#endif /* defined(CAM) */
        return (status);
}
```

1 This line declares a structure to process a special I/O control command. The `scsi_special` structure is defined in the `/usr/sys/h/scsi_special.h` file.

2 This line declares a structure defining the extended sense format for a REQUEST SENSE command. The `extended_sense` structure is defined in the `/usr/sys/h/rzdisk.h` file.

3 This section assigns the program parameters to the `special_cmd` members.

4 This is a standard I/O control call issued from application code. The SCSI_SPECIAL argument is defined in the `/usr/sys/h/scsi_special.h` file.

## 12.7 Other Sample Code

This section contains other driver code samples that use the SCSI/CAM special I/O interface.

### 12.7.1 Sample Code to Open a Device

The following sample code illustrates how to use the SCSI/CAM special I/O interface to open a CDROM device from a device driver:

```
/*****************************************************************
 *                                                               *
 * cdrom_open() - Driver Entry Point to Open CD-ROM Device.      *
 *                                                               *
 * Inputs:      dev = The device major/minor number pair.        *
 *              flags = The file open flags (read/write/nodelay).*
 *                                                               *
 * Outputs:     Returns 0 for Success or error code on Failure.  *
 *                                                               *
 *****************************************************************/
cdrom_open (dev, flags)
dev_t dev;
int flags;
{
        register PDRV_DEVICE *pd; 1
        DIR_READ_CAP_DATA read_capacity; 2
```

```
        DIR_READ_CAP_DATA *capacity = &read_capacity;
                .
                .
                .
        pd = GET_PDRV_PTR(dev); 3
        status = cdrom_read_capacity (pd, capacity, flags);
                .
                .
                .
        return (status);
}
/*************************************************************************
 *                                                                       *
 * cdrom_read_capacity() - Obtain Disk Capacity Information.             *
 *                                                                       *
 * Inputs:      pd = Pointer to peripheral driver structure.             *
 *              capacity = Pointer to read capacity data buffer.         *
 *              flags = The file open flags.                             *
 *                                                                       *
 * Outputs:     Returns 0 for Success or error code on Failure.          *
 *                                                                       *
 *************************************************************************/
int
cdrom_read_capacity (pd, capacity, flags)
PDRV_DEVICE *pd;
DIR_READ_CAP_DATA *capacity;
int flags;
{
        int status;

        PRINTD(DEV_BUS_ID(pd->pd_dev), DEV_TARGET(pd->pd_dev),
                DEV_LUN(pd->pd_dev), CAMD_CDROM, 4
           ("[%d/%d/%d] cdrom_read_capacity: ENTRY - pd = 0x%x, \
           capacity = 0x%x, flags = 0x%x0,
                DEV_BUS_ID(pd->pd_dev), DEV_TARGET(pd->pd_dev),
                DEV_LUN(pd->pd_dev), pd, capacity, flags));

        bzero ((char *)capacity, sizeof(*capacity));

        status = ccmn_SysSpecialCmd (pd->pd_dev, SCSI_READ_CAPACITY, 5
        (caddr_t) capacity, flags, (CCB_SCSIIO *) 0, SA_NO_ERROR_LOGGING);

        PRINTD(DEV_BUS_ID(pd->pd_dev), DEV_TARGET(pd->pd_dev),
                DEV_LUN(pd->pd_dev), CAMD_CDROM,
                ("[%d/%d/%d] cdrom_read_capacity: EXIT - status = %d (%s)0,
                DEV_BUS_ID(pd->pd_dev), DEV_TARGET(pd->pd_dev),
                DEV_LUN(pd->pd_dev), status, cdbg_SystemStatus(status))); 6

        return (status);
}
```

1 This line assigns a register to a Peripheral Device Structure pointer for the device to be opened. The Peripheral Device Structure is defined in the `/usr/sys/h/pdrv.h` file.

2 This line declares a structure to contain the capacity data returned for the device. The DIR_READ_CAP_DATA structure is defined in the `/usr/sys/h/scsi_direct.h` file.

3 This line calls the GET_PDRV_PTR macro to return a pointer to the Peripheral Device Structure for the device. The GET_PDRV_PTR macro is defined in the `/usr/sys/h/pdrv.h` file.

4 This section uses the bus, target, and lun information to be printed if the CAMD_CDROM flag is set. The CAMD_CDROM flag is defined in the `/usr/sys/io/cam/cam_debug.h` file.

5 This section calls the SCSI/CAM peripheral common routine `ccmn_SysSpecialCmd`, to issue the SCSI I/O command, passing the major/minor device number pair for the device and the SCSI_READ_CAPACITY `ioctl` command, which is defined in the `/usr/sys/h/rzdisk.h` file. It sets the SA_NO_ERROR_LOGGING flag, which is defined in the `/usr/sys/h/cam_special.h` file for device drivers, and in the `/usr/sys/h/scsi_special.h` file for application programs.

6 This debug line calls the `cdbg_SystemStatus` routine, passing the status as an argument.

### 12.7.2 Sample Code to Create a Driver Entry Point

The following sample code illustrates how to use the SCSI/CAM special I/O interface to create a driver entry point for I/O control commands:

```
/*****************************************************************
 *                                                               *
 * cdrom_ioctl() - Driver Entry Point for I/O Control Commands.  *
 *                                                               *
 * Inputs:      dev = The device major/minor number pair.        *
 *              cmd = The I/O control command code.              *
 *              data = The I/O parameters data buffer.           *
 *              flags = The file open flags (read/write/nodelay).*
 *                                                               *
 * Outputs:     Returns 0 for Success or error code on Failure.  *
 *                                                               *
 *****************************************************************/
int
cdrom_ioctl (dev, cmd, data, flags)
dev_t dev;
register int cmd;
caddr_t data;
int flags;
{
        register PDRV_DEVICE *pd; 1
        register DISK_SPECIFIC *cdisk;
        register DEV_DESC *dd;
        int status;

        pd    = GET_PDRV_PTR(dev); 2
        dd    = pd->pd_dev_desc;
        cdisk = (DISK_SPECIFIC *)pd->pd_specific;

        switch (cmd) {
                .
                .
            /* Process Expected I/O Control Commands */
                .
                .
            default:
                /*
                 * Process Special I/O Control Commands.
                 */
                status = ccmn_DoSpecialCmd (dev, cmd, data, flags, 3
                              (CCB_SCSIIO *) 0, 0);
                break;
        }
```

```
        return (status);
}
```

1 This section reserves registers for pointers to a Peripheral Device Structure and a Device Descriptor Structure, both of which are defined in the `/usr/sys/h/pdrv.h` file, and to a DISK_SPECIFIC structure, which is defined in the `/usr/sys/io/cam/cam_disk.h` file.

2 This line calls the GET_PDRV_PTR macro to return a pointer to the Peripheral Device Structure for the device. The GET_PDRV_PTR macro is defined in the `/usr/sys/h/pdrv.h`

3 This section calls the SCSI/CAM peripheral common routine, `ccmn_DoSpecialCmd`, to issue the special I/O command.

# Header Files Used by Device Drivers A

This appendix contains the following:

- A list of header files used by all device drivers
- A list of header files used by SCSI/CAM peripheral device drivers
- The contents of the `/usr/sys/h/cam.h` file.

Table A-1 lists the header files used by all SCSI device drivers, with a short description of the contents of each. For convenience, the full path name for the file is given and the files are listed in alphabetical order. However, device driver code should be written to include header files by specifying the relative path name instead of the full path name. For example, `/usr/sys/h/buf.h`, is the full path name for the file `buf.h` , but device driver code to include `buf.h` should be written as follows:

```
#include ../h/buf.h
```

**Table A-1: Header Files Used by Device Drivers**

| Header File | Contents |
|---|---|
| `/usr/sys/h/buf.h` | Defines the `buf` structure used to pass I/O requests to the `strategy` routine of a block driver. |
| `/usr/sys/h/clist.h` | Defines the `cblock` structure used to hold `clist` data. |
| `/usr/sys/h/conf.h` | Defines the `bdevsw` (block device switch), `cdevsw` (character device switch), and `linesw` (tty control line switch) structures. This file is included in the source file `/usr/sys/machine/common/conf.c`. |
| `/usr/sys/h/devio.h` | Defines common structures and definitions for device drivers and `ioctl`. |
| `/usr/sys/h/dir.h` | Defines structures and macros that operate on directories. |
| `/usr/sys/h/errno.h` | Defines the error codes returned to a user process by a driver. The codes `EIO`, `ENXIO`, `EACCES`, `EBUSY`, `ENODEV`, and `EINVAL` are used by driver routines. |
| `/usr/sys/h/file.h` | Defines I/O mode flags supplied by user programs to `open` and `fcntl` system calls. |

**Table A-1: (continued)**

| Header File | Contents |
|---|---|
| /usr/sys/h/inode.h | Defines values associated with the generic file system. |
| /usr/sys/h/ioctl.h | Defines commands for `ioctl` routines in different drivers. |
| /usr/sys/h/kernel.h | Defines global variables used by the kernel. |
| /usr/sys/h/map.h | Defines structures associated with resource allocation maps. |
| /usr/sys/h/mbuf.h | Defines constants related to memory allocation and macros used for type conversion. |
| /usr/sys/h/mtio.h | Defines commands and structures for magnetic tape operations. |
| /usr/sys/h/param.h | Defines constants and macros used by the ULTRIX kernel. |
| /usr/sys/h/proc.h | Defines the `proc` structure, which defines a user process. This file is not usually included by device driver source files. |
| /usr/sys/h/rzdisk.h | Definitions and data structures for SCSI disks. |
| /usr/sys/h/scsi_all.h | Definitions and data structures that apply to all SCSI device types according to Chapter 7 of the SCSI-2 specification. |
| /usr/sys/h/scsi_cdbs.h | Definitions and data structures that apply to Command Descriptor Blocks. |
| /usr/sys/h/scsi_direct.h | Definitions and data structures that apply to all SCSI direct-access devices according to Chapter 8 of the SCSI-2 specification. |
| /usr/sys/h/scsi_opcodes.h | Definitions of operation codes according to Chapter 6 of the SCSI-2 specification. |
| /usr/sys/h/scsi_phases.h | Definitions of SCSI bus phases according to Chapter 5 of the SCSI-2 specification. |
| /usr/sys/h/scsi_rodirect.h | Definitions and data structures that apply to read-only direct-access devices according to Chapter 13 of the SCSI 2 specification. |
| /usr/sys/h/scsi_sequential.h | Definitions and data structures that apply to all SCSI sequential-access devices according to Chapter 9 of the SCSI-2 specification. |
| /usr/sys/h/smp_lock.h | Defines variables and structures for managing locks for symmetric multiprocessing. |
| /usr/sys/h/systm.h | Defines global variables, such as the number of entries in the block switch and the number of character switch entries. It also defines the structure of the system-entry table. |
| /usr/sys/h/time.h | Defines structures and symbolic names used by time-related routines and macros. |

**Table A-1: (continued)**

| Header File | Contents |
|---|---|
| /usr/sys/h/tty.h | Defines parameters and structures associated with interactive terminals; also defines the clist structure. This file can be included by any device driver that uses the clist structure. |
| /usr/sys/h/types.h | Defines system data types and major and minor device macros. |
| /usr/sys/h/uio.h | Definition of the uio structure, some symbolic names, and an enumerated data type that can be assigned the value UIO_READ or UIO_WRITE. |
| /usr/sys/h/user.h | Defines the user structure that describes a user process and passes information about I/O requests to device drivers. |
| /usr/sys/h/vm.h | Contains a sequence of include statements that includes all of the virtual memory-related files. Including this file is a quick way of including all of the virtual memory-related files. |
| /usr/sys/h/vmmac.h | Definitions for the vtokpfnum kernel routine. |
| /usr/sys/machine/common/cpuconf.h | Defines a variety of macros, constants, and structures used by the system. |

Table A-2 lists the header files used by SCSI/CAM peripheral device drivers, along with a short description of the contents of each. For convenience, the full path name for the file is given and the files are listed in alphabetical order.

**Table A-2: Header Files Used by SCSI/CAM Drivers**

| Header File | Contents |
|---|---|
| /usr/sys/h/cam.h | Definitions and data structures for the CAM subsystem interface. |
| /usr/sys/h/cam_generic.h | Examples of definitions and data structures for a CAM generic device driver. |
| /usr/sys/h/cam_logger.h | Definitions and data structures for CAM subsystem error logging. |
| /usr/sys/h/cam_special.h | Definitions for the SCSI/CAM special I/O interface. |
| /usr/sys/h/dec_cam.h | Digital-spcific definitions and data structures for the CAM routines. |
| /usr/sys/h/pdrv.h | Definitions and data structures for the SCSI/CAM common routines. |
| /usr/sys/h/scsi_special.h | Definitions and data structures for the SCSI/CAM special I/O control interface. |

**Table A-2: (continued)**

| Header File | Contents |
|---|---|
| /usr/sys/h/uagt.h | Definitions and data structures for the User Agent Device Driver (UAGT) that controls access to the CAM subsystem. |
| /usr/sys/h/xpt.h | Definitions and data structures for the Transport Layer, XPT, in the CAM subsystem. |
| /usr/sys/io/cam/cam_config.h | SCSI/CAM peripheral device driver configuration definitions. |
| /usr/sys/io/cam/cam_debug.h | CAM debugging macros. |
| /usr/sys/io/cam/cam_disk.h | Definitions and data structures for SCSI/CAM disk devices. |
| /usr/sys/io/cam/cam_errlog.h | CAM error logging macros. |
| /usr/sys/io/cam/cam_tape.h | Definitions and data structures for SCSI/CAM tape devices. |
| /usr/sys/io/cam/ccfg.h | Definitions and data structures for the Configuration driver module in the CAM subsystem. |
| /usr/sys/io/cam/dme.h | Definitions and data structures needed by the CAM SIM Data Mover Engine (DME). |
| /usr/sys/io/cam/dme_3min_94_dma.h | Definitions and data structures needed by the CAM SIM Data Mover Engine (DME) for the DECstation 5000, Model 100 series. |
| /usr/sys/io/cam/dme_pmax_sii_ram.h | Definitions and data structures needed by the CAM SIM Data Mover Engine (DME) for the DECstation 2100 and DECstation 3100. |
| /usr/sys/io/cam/dme_turbo_94_ram.h | Definitions and data structures needed by the CAM SIM Data Mover Engine (DME) for the DECstation 5000, Model 200 series. |
| /usr/sys/io/cam/sim.h | Definitions and data structures needed by the CAM SIM-related files. |
| /usr/sys/io/cam/sim94.h | Definitions and data structures needed by the NCR53C94 SIM module. |
| /usr/sys/io/cam/simcirq.h | Definitions and data structures needed by the circular-queue-related functions contained in the Digital CAM subsystem. |
| /usr/sys/io/cam/sim_common.h | Definitions common to all the SIM-related source files. |
| /usr/sys/io/cam/sim_config.h | CAM SIM subsystem configuration definitions. |
| /usr/sys/io/cam/sim_sii.h | Definitions and data structures needed by the Digital SII SIM module. |
| /usr/sys/io/cam/sim_target.h | Definitions needed for target-mode operation of the SIM. |

**Table A-2: (continued)**

| Header File | Contents |
|---|---|
| /usr/sys/io/cam/sim_xpt.h | Macros and definitions that are specific to the SIM XPT component of the USCA subsystem. |

The contents of /usr/sys/h/cam.h follow:

```
/* cam.h         Version 1.09               Jul. 18, 1991 */

/* This file contains the definitions and data structures for the CAM
   Subsystem interface.  The contents of this file should match what
   data structures and constants that are specified in the CAM document,
   X3T9.2/90-186 Rev 2.5 that is produced by the SCSI-2 committee.

/* ------------------------------------------------------------------- */

/* Defines for the XPT function codes, Table 8-2 in the CAM spec. */

/* Common function commands, 0x00 - 0x0F */
#define XPT_NOOP 0x00  /* Execute Nothing */
#define XPT_SCSI_IO    0x01  /* Execute the requested SCSI IO */
#define XPT_GDEV_TYPE  0x02  /* Get the device type information */
#define XPT_PATH_INQ   0x03  /* Path Inquiry */
#define XPT_REL_SIMQ   0x04  /* Release the SIM queue that is frozen */
#define XPT_SASYNC_CB  0x05  /* Set Async callback parameters */
#define XPT_SDEV_TYPE  0x06  /* Set the device type information */

/* XPT SCSI control functions, 0x10 - 0x1F */
#define XPT_ABORT0x10  /* Abort the selected CCB */
#define XPT_RESET_BUS  0x11  /* Reset the SCSI bus */
#define XPT_RESET_DEV  0x12  /* Reset the SCSI device, BDR */
#define XPT_TERM_IO    0x13  /* Terminate the I/O process */

/* HBA engine commands, 0x20 - 0x2F */
#define XPT_ENG_INQ    0x20  /* HBA engine inquiry */
#define XPT_ENG_EXEC   0x21  /* HBA execute engine request */

/* Target mode commands, 0x30 - 0x3F */
#define XPT_EN_LUN     0x30   /* Enable LUN, Target mode support */
#define XPT_TARGET_IO 0x31   /* Execute the target IO request */

#define XPT_FUNC 0x7F  /* TEMPLATE */
#define XPT_VUNIQUE    0x80  /* All the rest are vendor unique commands */

/* ------------------------------------------------------------------- */

/* General allocation length defines for the CCB structures. */

#define IOCDBLEN 12    /* Space for the CDB bytes/pointer */
#define VUHBA          14    /* Vendor Unique HBA length */
#define SIM_ID         16    /* ASCII string len for SIM ID */
#define HBA_ID         16    /* ASCII string len for HBA ID */
#define SIM_PRIV50     /* Length of SIM private data area */

/* Structure definitions for the CAM control blocks, CCB's for the
subsystem. */

/* Common CCB header definition. */
typedef struct ccb_header
{
    struct ccb_header *my_addr;    /* The address of this CCB */
```

```
    u_short cam_ccb_len;     /* Length of the entire CCB */
    u_char cam_func_code;    /* XPT function code */
    u_char cam_status; /* Returned CAM subsystem status */
    u_char cam_hrsvd0; /* Reserved field, for alignment */
    u_char cam_path_id;      /* Path ID for the request */
    u_char cam_target_id;    /* Target device ID */
    u_char cam_target_lun;   /* Target LUN number */
    u_long cam_flags;  /* Flags for operation of the subsystem */
} CCB_HEADER;

/* Common SCSI functions. */

/* Union definition for the CDB space in the SCSI I/O request CCB */
typedef union cdb_un
{
    u_char *cam_cdb_ptr;          /* Pointer to the CDB bytes to send */
    u_char cam_cdb_bytes[ IOCDBLEN ];   /* Area for the CDB to send */
} CDB_UN;

/* Get device type CCB */
typedef struct ccb_getdev
{
    CCB_HEADER cam_ch;       /* Header information fields */
    char *cam_inq_data;           /* Ptr to the inquiry data space */
    u_char cam_pd_type;           /* Periph device type from the TLUN */
} CCB_GETDEV;

/* Path inquiry CCB */
typedef struct ccb_pathinq
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_char cam_version_num;  /* Version number for the SIM/HBA */
    u_char cam_hba_inquiry;  /* Mimic of INQ byte 7 for the HBA */
    u_char cam_target_sprt;  /* Flags for target mode support */
    u_char cam_hba_misc;     /* Misc HBA feature flags */
    u_short cam_hba_eng_cnt; /* HBA engine count */
    u_char cam_vuhba_flags[ VUHBA ]; /* Vendor unique capabilities */
    u_long cam_sim_priv;     /* Size of SIM private data area */
    u_long cam_async_flags;  /* Event cap. for Async Callback */
    u_char cam_hpath_id;     /* Highest path ID in the subsystem */
    u_char cam_initiator_id; /* ID of the HBA on the SCSI bus */
    u_char cam_prsvd0;       /* Reserved field, for alignment */
    u_char cam_prsvd1;       /* Reserved field, for alignment */
    char cam_sim_vid[ SIM_ID ];    /* Vendor ID of the SIM */
    char cam_hba_vid[ HBA_ID ];    /* Vendor ID of the HBA */
    u_char *cam_osd_usage;   /* Ptr for the OSD specific area */
} CCB_PATHINQ;

/* Release SIM Queue CCB */
typedef struct ccb_relsim
{
    CCB_HEADER cam_ch;       /* Header information fields */
} CCB_RELSIM;

/* SCSI I/O Request CCB */
typedef struct ccb_scsiio
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_char *cam_pdrv_ptr;    /* Ptr used by the Peripheral driver */
    CCB_HEADER *cam_next_ccb;     /* Ptr to the next CCB for action */
    u_char *cam_req_map;     /* Ptr for mapping info on the Req. */
    void (*cam_cbfcnp)();    /* Callback on completion function */
    u_char *cam_data_ptr;    /* Pointer to the data buf/SG list */
    u_long cam_dxfer_len;    /* Data xfer length */
    u_char *cam_sense_ptr;   /* Pointer to the sense data buffer */
```

```
    u_char cam_sense_len;    /* Num of bytes in the Autosense buf */
    u_char cam_cdb_len;           /* Number of bytes for the CDB */
    u_short cam_sglist_cnt;  /* Num of scatter gather list entries */
    u_long cam_osd_rsvd0;    /* OSD Reserved field, for alignment */
    u_char cam_scsi_status;  /* Returned scsi device status */
    u_char cam_sense_resid;  /* Autosense resid length: 2's comp */
    u_char cam_osd_rsvd1[2]; /* OSD Reserved field, for alignment */
    long cam_resid;          /* Transfer residual length: 2's comp */
    CDB_UN cam_cdb_io;       /* Union for CDB bytes/pointer */
    u_long cam_timeout;           /* Timeout value */
    u_char *cam_msg_ptr;     /* Pointer to the message buffer */
    u_short cam_msgb_len;    /* Num of bytes in the message buf */
    u_short cam_vu_flags;    /* Vendor unique flags */
    u_char cam_tag_action;   /* What to do for tag queuing */
    u_char cam_iorsvd0[3];   /* Reserved field, for alignment */
    u_char cam_sim_priv[ SIM_PRIV ];    /* SIM private data area */
} CCB_SCSIIO;

/* Set Async Callback CCB */
typedef struct ccb_setasync
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_long cam_async_flags;  /* Event enables for Callback resp */
    void (*cam_async_func)();     /* Async Callback function address */
    u_char *pdrv_buf;        /* Buffer set aside by the Per. drv */
    u_char pdrv_buf_len;     /* The size of the buffer */
} CCB_SETASYNC;

/* Set device type CCB */
typedef struct ccb_setdev
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_char cam_dev_type;     /* Val for the dev type field in EDT */
} CCB_SETDEV;

/* SCSI Control Functions. */

/* Abort XPT Request CCB */
typedef struct ccb_abort
{
    CCB_HEADER cam_ch;       /* Header information fields */
    CCB_HEADER *cam_abort_ch;     /* Pointer to the CCB to abort */
} CCB_ABORT;

/* Reset SCSI Bus CCB */
typedef struct ccb_resetbus
{
    CCB_HEADER cam_ch;       /* Header information fields */
} CCB_RESETBUS;

/* Reset SCSI Device CCB */
typedef struct ccb_resetdev
{
    CCB_HEADER cam_ch;       /* Header information fields */
} CCB_RESETDEV;

/* Terminate I/O Process Request CCB */
typedef struct ccb_termio
{
    CCB_HEADER cam_ch;       /* Header information fields */
    CCB_HEADER *cam_termio_ch;    /* Pointer to the CCB to terminate */
} CCB_TERMIO;

/* Target mode structures. */
```

```
typedef struct ccb_en_lun
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_short cam_grp6_len;    /* Group 6 VU CDB length */
    u_short cam_grp7_len;    /* Group 7 VU CDB length */
    u_char *cam_ccb_listptr; /* Pointer to the target CCB list */
    u_short cam_ccb_listcnt; /* Count of Target CCBs in the list */
} CCB_EN_LUN;

/* HBA engine structures. */

typedef struct ccb_eng_inq
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_short cam_eng_num;     /* The number for this inquiry */
    u_char cam_eng_type;     /* Returned engine type */
    u_char cam_eng_algo;     /* Returned algorithm type */
    u_long cam_eng_memory;   /* Returned engine memory size */
} CCB_ENG_INQ;

typedef struct ccb_eng_exec  /* NOTE: must match SCSIIO size */
{
    CCB_HEADER cam_ch;       /* Header information fields */
    u_char *cam_pdrv_ptr;    /* Ptr used by the Peripheral driver */
    u_long cam_engrsvd0;     /* Reserved field, for alignment */
    u_char *cam_req_map;     /* Ptr for mapping info on the Req. */
    void (*cam_cbfcnp)();    /* Callback on completion function */
    u_char *cam_data_ptr;    /* Pointer to the data buf/SG list */
    u_long cam_dxfer_len;    /* Data xfer length */
    u_char *cam_engdata_ptr; /* Pointer to the engine buffer data */
    u_char cam_engrsvd1;     /* Reserved field, for alignment */
    u_char cam_engrsvd2;     /* Reserved field, for alignment */
    u_short cam_sglist_cnt;  /* Num of scatter gather list entries */
    u_long cam_dmax_len;     /* Destination data maximum length */
    u_long cam_dest_len;     /* Destination data length */
    long cam_src_resid;           /* Source residual length: 2's comp */
    u_char cam_engrsvd3[12]; /* Reserved field, for alignment */
    u_long cam_timeout;           /* Timeout value */
    u_long cam_engrsvd4;     /* Reserved field, for alignment */
    u_short cam_eng_num;     /* Engine number for this request */
    u_short cam_vu_flags;    /* Vendor unique flags */
    u_char cam_engrsvd5;     /* Reserved field, for alignment */
    u_char cam_engrsvd6[3];  /* Reserved field, for alignment */
    u_char cam_sim_priv[ SIM_PRIV ];    /* SIM private data area */
} CCB_ENG_EXEC;

/* The CAM_SIM_ENTRY definition is used to define the entry points for
the SIMs contained in the SCSI CAM subsystem.  Each SIM file will
contain a declaration for it's entry.  The address for this entry will
be stored in the cam_conftbl[] array along will all the other SIM
entries. */

typedef struct cam_sim_entry
{
    long (*sim_init)();      /* Pointer to the SIM init routine */
    long (*sim_action)();    /* Pointer to the SIM CCB go routine */
} CAM_SIM_ENTRY;

/* ------------------------------------------------------------------ */

/* Defines for the CAM status field in the CCB header. */

#define CAM_REQ_INPROG 0x00  /* CCB request is in progress */
#define CAM_REQ_CMP    0x01  /* CCB request completed w/out error */
#define CAM_REQ_ABORTED      0x02  /* CCB request aborted by the host */
```

```
#define CAM_UA_ABORT   0x03  /* Unable to Abort CCB request */
#define CAM_REQ_CMP_ERR      0x04  /* CCB request completed with an err */
#define CAM_BUSY 0x05  /* CAM subsystem is busy */
#define CAM_REQ_INVALID      0x06  /* CCB request is invalid */
#define CAM_PATH_INVALID0x07 /* Path ID supplied is invalid */
#define CAM_DEV_NOT_THERE0x08     /* SCSI device not installed/there */
#define CAM_UA_TERMIO  0x09  /* Unable to Terminate I/O CCB req */
#define CAM_SEL_TIMEOUT      0x0A  /* Target selection timeout */
#define CAM_CMD_TIMEOUT      0x0B  /* Command timeout */
#define CAM_MSG_REJECT_REC0x0D    /* Message reject received */
#define CAM_SCSI_BUS_RESET0x0E    /* SCSI bus reset sent/received */
#define CAM_UNCOR_PARITY0x0F /* Uncorrectable parity err occurred */
#define CAM_AUTOSENSE_FAIL0x10    /* Autosense: Request sense cmd fail */
#define CAM_NO_HBA     0x11  /* No HBA detected Error */
#define CAM_DATA_RUN_ERR0x12 /* Data overrun/underrun error */
#define CAM_UNEXP_BUSFREE0x13     /* Unexpected BUS free */
#define CAM_SEQUENCE_FAIL0x14     /* Target bus phase sequence failure */
#define CAM_CCB_LEN_ERR      0x15  /* CCB length supplied is inadequate */
#define CAM_PROVIDE_FAIL0x16 /* Unable to provide requ. capability */
#define CAM_BDR_SENT   0x17  /* A SCSI BDR msg was sent to target */
#define CAM_REQ_TERMIO 0x18  /* CCB request terminated by the host */

#define CAM_LUN_INVALID      0x38  /* LUN supplied is invalid */
#define CAM_TID_INVALID      0x39  /* Target ID supplied is invalid */
#define CAM_FUNC_NOTAVAIL0x3A     /* The requ. func is not available */
#define CAM_NO_NEXUS   0x3B  /* Nexus is not established */
#define CAM_IID_INVALID      0x3C  /* The initiator ID is invalid */
#define CAM_CDB_RECVD  0x3E  /* The SCSI CDB has been received */
#define CAM_SCSI_BUSY  0x3F  /* SCSI bus busy */

#define CAM_SIM_QFRZN  0x40  /* The SIM queue is frozen w/this err */
#define CAM_AUTOSNS_VALID0x80     /* Autosense data valid for target */

#define CAM_STATUS_MASK      0x3F  /* Mask bits for just the status # */

/* ---------------------------------------------------------------- */

/* Defines for the CAM flags field in the CCB header. */

#define CAM_DIR_RESV      0x00000000 /* Data direction (00: reserved) */
#define CAM_DIR_IN        0x00000040 /* Data direction (01: DATA IN) */
#define CAM_DIR_OUT       0x00000080 /* Data direction (10: DATA OUT) */
#define CAM_DIR_NONE      0x000000C0 /* Data direction (11: no data) */
#define CAM_DIS_AUTOSENSE 0x00000020 /* Disable autosense feature */
#define CAM_SCATTER_VALID 0x00000010 /* Scatter/gather list is valid */
#define CAM_DIS_CALLBACK  0x00000008 /* Disable callback feature */
#define CAM_CDB_LINKED   0x00000004 /* The CCB contains a linked CDB */
#define CAM_QUEUE_ENABLE  0x00000002 /* SIM queue actions are enabled */
#define CAM_CDB_POINTER   0x00000001 /* The CDB field contains a pointer */

#define CAM_DIS_DISCONNECT 0x00008000 /* Disable disconnect */
#define CAM_INITIATE_SYNC 0x00004000 /* Attempt Sync data xfer, and SDTR */
#define CAM_DIS_SYNC      0x00002000 /* Disable sync, go to async */
#define CAM_SIM_QHEAD     0x00001000 /* Place CCB at the head of SIM Q */
#define CAM_SIM_QFREEZE   0x00000800 /* Return the SIM Q to frozen state */
#define CAM_SIM_QFRZDIS   0x00000400 /* Disable the SIM Q frozen state */
#define CAM_ENG_SYNC      0x00000200 /* Flush resid bytes before cmplt */

#define CAM_ENG_SGLIST    0x00800000 /* The SG list is for the HBA engine */
#define CAM_CDB_PHYS      0x00400000 /* CDB pointer is physical */
#define CAM_DATA_PHYS     0x00200000 /* SG/Buffer data ptrs are physical */
#define CAM_SNS_BUF_PHYS  0x00100000 /* Autosense data ptr is physical */
#define CAM_MSG_BUF_PHYS  0x00080000 /* Message buffer ptr is physical */
#define CAM_NXT_CCB_PHYS  0x00040000 /* Next CCB pointer is physical */
#define CAM_CALLBCK_PHYS  0x00020000 /* Callback func ptr is physical */
```

```
#define CAM_DATAB_VALID   0x80000000 /* Data buffer valid */
#define CAM_STATUS_VALID  0x40000000 /* Status buffer valid */
#define CAM_MSGB_VALID    0x20000000 /* Message buffer valid */
#define CAM_TGT_PHASE_MODE 0x08000000 /* The SIM will run in phase mode */
#define CAM_TGT_CCB_AVAIL 0x04000000 /* Target CCB available */
#define CAM_DIS_AUTODISC  0x02000000 /* Disable autodisconnect */
#define CAM_DIS_AUTOSRP   0x01000000 /* Disable autosave/restore ptrs */

/* ------------------------------------------------------------------ */

/* Defines for the SIM/HBA queue actions.  These value are used in the
SCSI I/O CCB, for the queue action field. [These values should match the
defines from some other include file for the SCSI message phases.  We may
not need these definitions here. ] */

#define CAM_SIMPLE_QTAG           0x20  /* Tag for a simple queue */
#define CAM_HEAD_QTAG       0x21  /* Tag for head of queue */
#define CAM_ORDERED_QTAG    0x22  /* Tag for ordered queue */

/* ------------------------------------------------------------------ */

/* Defines for the timeout field in the SCSI I/O CCB.  At this time a
value of 0xF-F indicates a infinite timeout.  A value of 0x0-0
indicates that the SIM's default timeout can take effect. */

#define CAM_TIME_DEFAULT    0x00000000 /* Use SIM default value */
#define CAM_TIME_INFINITY   0xFFFFFFFF /* Infinite timeout for I/O */

/* ------------------------------------------------------------------ */

/* Defines for the Path Inquiry CCB fields. */

#define    CAM_VERSION 0x25  /* Binary value for the current ver */

#define PI_MDP_ABLE    0x80  /* Supports MDP message */
#define PI_WIDE_32     0x40  /* Supports 32 bit wide SCSI */
#define PI_WIDE_16     0x20  /* Supports 16 bit wide SCSI */
#define PI_SDTR_ABLE   0x10  /* Supports SDTR message */
#define PI_LINKED_CDB  0x08  /* Supports linked CDBs */
#define PI_TAG_ABLE    0x02  /* Supports tag queue message */
#define PI_SOFT_RST    0x01  /* Supports soft reset */

#define PIT_PROCESSOR  0x80  /* Target mode processor mode */
#define PIT_PHASE0x40  /* Target mode phase cog. mode */

#define PIM_SCANHILO   0x80  /* Bus scans from ID 7 to ID 0 */
#define PIM_NOREMOVE   0x40  /* Removable dev not included in scan */
#define PIM_NOINQUIRY  0x20  /* Inquiry data not kept by XPT */

/* ------------------------------------------------------------------ */

/* Defines for Asynchronous Callback CCB fields. */

#define AC_FOUND_DEVICES 0x80     /* During a rescan new device found */
#define AC_SIM_DEREGISTER 0x40    /* A loaded SIM has de-registered */
#define AC_SIM_REGISTER      0x20  /* A loaded SIM has registered */
#define AC_SENT_BDR          0x10  /* A BDR message was sent to target */
#define AC_SCSI_AEN          0x08  /* A SCSI AEN has been received */
#define AC_UNSOL_RESEL 0x02  /* A unsolicited reselection occurred */
#define AC_BUS_RESET         0x01  /* A SCSI bus RESET occurred */

/* ------------------------------------------------------------------ */

/* Typedef for a scatter/gather list element. */
```

```
typedef struct sg_elem
{
    u_char *cam_sg_address;  /* Scatter/Gather address */
    u_long cam_sg_count;     /* Scatter/Gather count */
} SG_ELEM;

/* ------------------------------------------------------------------ */

/* Defines for the HBA engine inquiry CCB fields. */

#define EIT_BUFFER     0x00  /* Engine type: Buffer memory */
#define EIT_LOSSLESS   0x01  /* Engine type: Lossless compression */
#define EIT_LOSSLY     0x02  /* Engine type: Lossly compression */
#define EIT_ENCRYPT    0x03  /* Engine type: Encryption */

#define EAD_VUNIQUE    0x00  /* Eng algorithm ID: vendor unique */
#define EAD_LZ1V10x00  /* Eng algorithm ID: LZ1 var. 1*/
#define EAD_LZ2V10x00  /* Eng algorithm ID: LZ2 var. 1*/
#define EAD_LZ2V20x00  /* Eng algorithm ID: LZ2 var. 2*/

/* ------------------------------------------------------------------ */
/* ------------------------------------------------------------------ */

/* Unix OSD defines and data structures. */

#define INQLEN   36    /* Inquiry string length to store. */

#define CAM_SUCCESS    0  /* For signaling general success */
#define CAM_FAILURE    1  /* For signaling general failure */

#define CAM_FALSE0  /* General purpose flag value */
#define CAM_TRUE 1  /* General purpose flag value */

#define XPT_CCB_INVALID      -1 /* for signaling a bad CCB to free */

/* General Union for Kernel Space allocation.  Contains all the
possible CCB structures.  This union should never be used for
manipulating CCB's its only use is for the allocation and deallocation
of raw CCB space. */

typedef union ccb_size_union
{
    CCB_SCSIIO    csio;  /* Please keep this first, for debug/print */
    CCB_GETDEV    cgd;
    CCB_PATHINQ   cpi;
    CCB_RELSIM    crs;
    CCB_SETASYNC  csa;
    CCB_SETDEV    csd;
    CCB_ABORT     cab;
    CCB_RESETBUS  crb;
    CCB_RESETDEV  crd;
    CCB_TERMIO    ctio;
    CCB_EN_LUN    cel;
    CCB_ENG_INQ   cei;
    CCB_ENG_EXEC  cee;
} CCB_SIZE_UNION;

/* The typedef for the Async callback information.  This structure is
used to store the supplied info from the Set Async Callback CCB, in
the EDT table in a linked list structure. */

typedef struct async_info
{
    struct async_info *cam_async_next; /* pointer to the next structure */
    u_long cam_event_enable; /* Event enables for Callback resp */
```

```
    void (*cam_async_func)();     /* Async Callback function address */
    u_long cam_async_blen;   /* Length of "information" buffer */
    u_char *cam_async_ptr;   /* Address for the "information */
} ASYNC_INFO;

/* The CAM EDT table contains the device information for all the
devices, SCSI ID and LUN, for all the SCSI busses in the system.  The
table contains a CAM_EDT_ENTRY structure for each device on the bus.
*/

typedef struct cam_edt_entry
{
    long cam_tlun_found; /* Flag for the existence of the target/LUN */
    ASYNC_INFO *cam_ainfo; /* Async callback list info for this B/T/L */
    u_long cam_owner_tag; /* Tag for the peripheral driver's ownership */
    char cam_inq_data[ INQLEN ]; /* storage for the inquiry data */
} CAM_EDT_ENTRY;

/* ------------------------------------------------------------------ */
```

# Summary of Device Driver Routines B

Table B-1 summarizes the routines used by all device drivers. The table has the following columns:

- Routine - the driver routine name.
- Structure/file - the structure or file where you define the driver routine entry point.
- Character - an X in this column indicates the routine is applicable to a character device.
- Block - an X in this column indicates the routine is applicable to a block device. N/A indicates not applicable.

For convenience, the routines appear in alphabetical order.

**Note**

The `psize` routine is no longer used. Previously, the routine determined the location on the disk where ULTRIX should perform a dump. It has been superseded by driver `ioctl` calls that obtain disk geometry information.

**Table B-1: Summary of Device Driver Routines**

| Routine | Structure/File | Character | Block |
|---|---|---|---|
| `attach` | Peripheral driver | X | X |
| `close` | `cdevsw bdevsw` | X | X |
| `interrupt` | System configuration file | X | X |
| `ioctl` | `cdevsw bdevsw` | X | X |
| `mmap` | `cdevsw` | X | N/A |
| `open` | `cdevsw bdevsw` | X | X |
| `probe` | SIM | X | X |
| `read` | `cdevsw` | X | N/A |
| `reset` | `cdevsw` | X | N/A |
| `select` | `cdevsw` | X | N/A |
| `slave` | Peripheral driver | X | X |
| `stop` | `cdevsw` | X | N/A |
| `strategy` | `cdevsw bdevsw` | X | X |
| `write` | `cdevsw` | X | N/A |

# SCSI/CAM Routines in ULTRIX Reference Page Format

# C

This appendix contains a description of each of the routines described in this guide, in ULTRIX reference page format. The routines are included in alphabetical order.

## Name

cam_logger – allocates a system error log buffer and fills in a `uerf` error log packet

## Syntax

u_long cam_logger(*cam_err_hdr, bus, target, lun*)
CAM_ERR_HDR **cam_err_hdr*;
long *bus*;
long *target*;
long *lun*;

## Arguments

| | |
|---|---|
| *cam_err_hdr* | Pointer to the Error Header Structure. |
| *bus* | SCSI target's bus controller number. |
| *target* | SCSI target's ID number. |
| *lun* | SCSI target's logical unit number. |

## Description

The `cam_logger` routine allocates a system error log buffer and fills in a `uerf` error log packet. The routine fills in the bus, target, and LUN information from the Error Header Structure passed to it and copies the Error Header Structure and the Error Entry Structures and data to the error log buffer.

## Return Value

None

## Name

ccfg_attach – calls a SCSI/CAM peripheral driver's attach routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found

## Syntax

int ccfg_attach(*ui*)
register struct uba_device **ui*;

## Arguments

*ui* Pointer to the device information contained in the `uba_device` structure.

## Description

The `ccfg_attach` routine calls a SCSI/CAM peripheral driver's attach routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found. The routine is called during autoconfiguration. The `ccfg_attach` routine locates the configured driver in the SCSI/CAM peripheral driver configuration table. If the driver is located successfully, the SCSI/CAM peripheral driver's attach routine is called with a pointer to the unit information structure for the device from the kernel `uba_device` structure. The SCSI/CAM peripheral driver's attach routine performs its own attach initialization.

## Return Value

0 = success
1 = failure
The return value is ignored by autoconfiguration code.

## Name

ccfg_edtscan – issues SCSI INQUIRY commands to all possible SCSI targets and LUNs attached to the buses

## Syntax

u_long ccfg_edtscan(*scan_type*, *bus*, *target*, *lun*)
long *scan_type*;
long *bus*;
long *target*;
long *lun*;

## Arguments

| | |
|---|---|
| *scan_type* | Types of scans are: FULL, which traverses the CAM_EDT_ENTRY structure and sends an INQUIRY command to each target and LUN; PARTIAL, which sends an INQUIRY command only to targets and LUNs flagged as ‘‘not found’’; or SINGLE, which sends an INQUIRY command to the selected bus, target, and LUN passed as arguments. |
| *bus* | SCSI target’s bus controller number. |
| *target* | SCSI target’s ID number. |
| *lun* | SCSI target’s logical unit number. |

## Description

The `ccfg_edtscan` routine issues SCSI INQUIRY commands to all possible SCSI targets and LUNs attached to the buses. The routine uses the CAM subsystem in the normal manner by sending SCSI I/O CCBs to the SIMs. The INQUIRY data returned is stored in the EDT structures and the `cam_tlun_found` flag is set. This routine can be called by the SCSI/CAM peripheral device drivers to reissue a full, partial, or single bus scan command.

## Return Value

CAM_SUCCESS
CAM_FAILURE

## Name

ccfg_slave – calls a SCSI/CAM peripheral driver's slave routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found

## Syntax

int ccfg_slave(*ui*)
register struct uba_device **ui*;
caddr_t *csr*;

## Arguments

| | |
|---|---|
| *ui* | Pointer to the device information contained in the `uba_device` structure. |
| *csr* | The virtual address of the control and status register (CSR) address. |

## Description

The `ccfg_slave` routine calls a SCSI/CAM peripheral driver's slave routine after a match on the `cpd_name` member of the CAM_PERIPHERAL_DRIVER structure is found. The routine is called during autoconfiguration. The `ccfg_slave` routine locates the configured driver in the SCSI/CAM peripheral driver configuration table. If the driver is located successfully, the SCSI/CAM peripheral driver's slave routine is called with a pointer to the unit information structure for the device from the kernel `uba_device` structure and the virtual address of its control and status register (CSR). The SCSI/CAM peripheral driver's slave routine performs its own slave initialization.

## Return Value

0 = slave is alive
1 = slave is not alive

## Name

ccmn_DoSpecialCmd – provides a simplified interface to the special command routine

## Syntax

ccmn_DoSpecialCmd(*dev*, *cmd*, *data*, *flag*s, *ccb*, *sflags*)
dev_t *dev*;
int *cmd*;
caddr_t *data*;
int *flag*s;
CCB_SCSIIO **ccb*;
int *sflags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cmd* The ioctl command, UAGT_CAM_IO.

*data* The user data buffer.

*flag*s Flags set when a file is open.

*ccb* Pointer to the SCSI I/O CCB structure. This field is optional.

*sflags* SCSI/CAM special I/O control flags. The available flags are:

| Flag Name | Description |
|---|---|
| SA_NO_ERROR_RECOVERY | Do not perform error recovery |
| SA_NO_ERROR_LOGGING | Do not log error messages |
| SA_NO_SLEEP_INTR | Do not allow sleep interrupts |
| SA_NO_SIMQ_THAW | Leave SIM queue frozen when there are errors |

## Description

The `ccmn_DoSpecialCmd` routine provides a simplified interface to the special command routine. The routine prepares for and issues special commands.

## Return Value

The `ccmn_DoSpecialCmd` routine returns a value of 0 (zero) upon successful completion. It returns the appropriate error code on failure.

## Name

ccmn_SysSpecialCmd – lets a system request issue SCSI I/O commands to the SCSI/CAM special I/O interface

## Syntax

ccmn_SysSpecialCmd(*dev*, *cmd*, *data*, *flag*s, *ccb*, *sflags*)
dev_t *dev*;
int *cmd*;
caddr_t *data*;
int *flag*s;
CCB_SCSIIO **ccb*;
int *sflags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cmd* The ioctl command, UAGT_CAM_IO.

*data* The user data buffer.

*flag*s Flags set when a file is open.

*ccb* Pointer to the SCSI I/O CCB structure. This field is optional.

*sflags* SCSI/CAM special I/O control flags. The available flags are:

| Flag Name | Description |
|---|---|
| SA_NO_ERROR_RECOVERY | Do not perform error recovery |
| SA_NO_ERROR_LOGGING | Do not log error messages |
| SA_NO_SLEEP_INTR | Do not allow sleep interrupts |
| SA_NO_SIMQ_THAW | Leave SIM queue frozen when there are errors |

## Description

The `ccmn_SysSpecialCmd` routine lets a system request issue SCSI I/O commands to the SCSI/CAM special I/O interface. This permits existing SCSI commands to be issued from within kernel code.

## Return Value

The `ccmn_DoSpecialCmd` routine returns a value of 0 (zero) upon successful completion. It returns the appropriate error code on failure.

## Name

ccmn_abort_ccb_bld – creates an ABORT CCB and sends it to the XPT

## Syntax

ccmn_abort_ccb_bld(*dev, cam_flags, abort_ccb*)
dev_t *dev*;
u_long *cam_flags*;
CCB_HEADER **abort_ccb*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |

| Flag Name | Description |
|---|---|
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*abort_ccb* Pointer to the CAM Control Block (CCB) header structure to abort.

## Description

The `ccmn_abort_ccb_bld` routine creates an ABORT CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the address of the CCB to be aborted and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_ABORT pointer

## See Also

`ccmn_get_ccb`, `ccmn_send_ccb`

## Name

ccmn_abort_que – sends an ABORT CCB request for each SCSI I/O CCB on the active queue

## Syntax

ccmn_abort_que(*pd*)
PDRV_DEVICE **pd*;

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

## Description

The `ccmn_abort_que` routine sends an ABORT CCB request for each SCSI I/O CCB on the active queue. This routine must be called with the Peripheral Device Structure locked.

The `ccmn_abort_que` routine calls the `ccmn_abort_ccb_bld` routine to create an ABORT CCB for the first active CCB on the active queue and send it to the XPT. It calls the `ccmn_send_ccb` routine to send the ABORT CCB for each of the other CCBs on the active queue that are marked as active to the XPT. The `ccmn_abort_que` routine then calls the `ccmn_rel_ccb` routine to return the ABORT CCB to the XPT.

## Return Value

None

## See Also

`ccmn_abort_ccb_bld`, `ccmn_rel_ccb`, `ccmn_send_ccb`

## Name

ccmn_bdr_ccb_bld – creates a BUS DEVICE RESET CCB and sends it to the XPT

## Syntax

ccmn_bdr_ccb_bld(*dev, cam_flags*)
dev_t *dev*;
u_long *cam_flags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |

| Flag Name | Description |
|---|---|
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

## Description

The ccmn_bdr_ccb_bld routine creates a BUS DEVICE RESET CCB and sends it to the XPT. The routine calls the ccmn_get_ccb routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the ccmn_send_ccb routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_RESETDEV pointer

## See Also

ccmn_get_ccb, ccmn_send_ccb

## Name

ccmn_br_ccb_bld – creates a BUS RESET CCB and sends it to the XPT

## Syntax

ccmn_br_ccb_bld(*dev*, *cam_flags*)
dev_t *dev*;
u_long *cam_flags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |

| Flag Name | Description |
|---|---|
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

## Description

The ccmn_br_ccb_bld routine creates a BUS RESET CCB and sends it to the XPT. The routine calls the ccmn_get_ccb routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the ccmn_send_ccb routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_RESETBUS pointer

## See Also

ccmn_get_ccb, ccmn_send_ccb

## Name

ccmn_ccb_status – assigns individual CAM status values to generic categories

## Syntax

ccmn_ccb_status(*ccb*)
CCB_HEADER **ccb*;

## Arguments

*ccb* Pointer to the CAM Control Block (CCB) header structure whose status is to be categorized.

## Description

The `ccmn_ccb_status` routine assigns individual CAM status values to generic categories. The following table shows the returned category for each CAM status value:

| CAM Status | Assigned Category |
|---|---|
| CAM_REQ_INPROG | CAT_INPROG |
| CAM_REQ_CMP | CAT_CMP |
| CAM_REQ_ABORTED | CAT_ABORT |
| CAM_UA_ABORT | CAT_ABORT |
| CAM_REQ_CMP_ERR | CAT_CMP_ERR |
| CAM_BUSY | CAT_BUSY |
| CAM_REQ_INVALID | CAT_CCB_ERR |
| CAM_PATH_INVALID | CAT_NO_DEVICE |
| CAM_DEV_NOT_THERE | CAT_NO_DEVICE |
| CAM_UA_TERMIO | CAT_ABORT |
| CAM_SEL_TIMEOUT | CAT_DEVICE_ERR |
| CAM_CMD_TIMEOUT | CAT_DEVICE_ERR |
| CAM_MSG_REJECT_REC | CAT_DEVICE_ERR |
| CAM_SCSI_BUS_RESET | CAT_RESET |
| CAM_UNCOR_PARITY | CAT_DEVICE_ERR |
| CAM_AUTOSENSE_FAIL | CAT_BAD_AUTO |
| CAM_NO_HBA | CAT_NO_DEVICE |
| CAM_DATA_RUN_ERR | CAT_DEVICE_ERR |
| CAM_UNEXP_BUSFREE | CAT_DEVICE_ERR |
| CAM_SEQUENCE_FAIL | CAT_DEVICE_ERR |
| CAM_CCB_LEN_ERR | CAT_CCB_ERR |
| CAM_PROVIDE_FAIL | CAT_CCB_ERR |
| CAM_BDR_SENT | CAT_RESET |
| CAM_REQ_TERMIO | CAT_ABORT |
| CAM_LUN_INVALID | CAT_NO_DEVICE |
| CAM_TID_INVALID | CAT_NO_DEVICE |
| CAM_FUNC_NOTAVAIL | CAT_CCB_ERR |
| CAM_NO_NEXUS | CAT_NO_DEVICE |
| CAM_IID_INVALID | CAT_NO_DEVICE |
| CAM_SCSI_BUSY | CAT_SCSI_BUSY |
| Other | CAT_UNKNOWN |

## Return Value

The following categories can be returned:

| CAM Status | Assigned Category |
|---|---|
| CAT_INPROG | Request is in progress. |
| CAT_CMP | Request has completed without error. |
| CAT_CMP_ERR | Request has completed with error. |
| CAT_ABORT | Request either has been aborted or terminated, or it cannot be aborted or terminated. |
| CAT_BUSY | CAM is busy. |
| CAT_SCSI_BUSY | SCSI is busy. |
| CAT_NO_DEVICE | No device at address specified in request. |
| CAT_DEVICE_ERR | Bus or device problems. |
| CAT_BAD_AUTO | Invalid autosense data. |
| CAT_CCB_ERR | Invalid CCB. |
| CAT_RESET | Unit or bus has detected a reset condition. |
| CAT_UNKNOWN | Invalid CAM status. |

## Name

ccmn_ccbwait – sleeps waiting for a SCSI I/O CCB request to complete

## Syntax

ccmn_ccbwait(*ccb*, *priority*)
register CCB_SCSIIO **ccb*;
register int **priority*;

## Arguments

*ccb* Pointer to the CCB on which to wait.

*priority* Software priority at which to sleep.

## Description

The `ccmn_ccbwait` routine sleeps waiting for a SCSI I/O CCB request to complete. If the priority is greater than PZERO, the `ccmn_ccbwait` routine sleeps at an interruptible priority in order to catch signals.

## Return Value

EINTR – Sleep was interrupted due to receiving a signal
0 – CCB has completed

## Name

ccmn_close_unit – handles the common close for all SCSI/CAM peripheral device drivers

## Syntax

ccmn_close_unit(*dev*)
dev_t *dev*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

## Description

The `ccmn_close_unit` routine handles the common close for all SCSI/CAM peripheral device drivers. It sets the open count to zero.

## Return Value

None

## See Also

`ccmn_open_unit`

## Name

ccmn_errlog – reports error conditions for the SCSI/CAM peripheral device driver

## Syntax

ccmn_errlog(*func_str*, *opt_str*, *flag*s, *ccb*, *dev*, *unused*)
u_char **func_str*;
u_char **opt_str*;
u_long *flag*s;
CCB_HEADER ***ccb*;
dev_t *dev*;
u_char **unused*;

## Arguments

| | |
|---|---|
| *func_str* | Pointer to function in which the error was detected. |
| *opt_str* | Pointer to optional logging string. |
| *flag*s | Flags for peripherial drivers error types. The flags are: CAM_INFORMATIONAL; CAM_SOFTERR; CAM_HARDERR; CAM_SOFTWARE; and CAM_DUMP_ALL. They are defined in the `/usr/sys/h/cam_logger.h` file. |
| *ccb* | Pointer to the CAM Control Block (CCB) header structure. |
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *unused* | Unused. It is needed to match the number of arguments expected by the CAM_ERROR macro, which is defined in the `/usr/sys/io/cam/cam_errlog.h` file |

## Description

The `ccmn_errlog` routine reports error conditions for the SCSI/CAM peripheral device driver. The routine is passed a pointer to the name of the function in which the error was detected. The routine builds informational strings based on the error condition.

## Return Value

None

## Name

ccmn_gdev_ccb_bld – creates a GET DEVICE TYPE CCB and sends it to the XPT

## Syntax

ccmn_gdev_ccb_bld(*dev, cam_flags, inq_addr*)
dev_t *dev*;
u_long *cam_flags*;
u_char **inq_addr*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |

| Flag Name | Description |
|---|---|
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*inq_addr* Pointer to the address for Inquiry data returned.

## Description

The `ccmn_gdev_ccb_bld` routine creates a GET DEVICE TYPE CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The `ccmn_gdev_ccb_bld` routine calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_GETDEV pointer

## See Also

`ccmn_get_ccb`, `ccmn_send_ccb`

## Name

ccmn_get_bp – allocates a `buf` structure

## Syntax

ccmn_get_bp()

## Arguments

None

## Description

The `ccmn_get_bp` routine allocates a `buf` structure. This function must not be called at interrupt context. The function may sleep waiting for resources.

## Return Value

Pointer to buf structure. This pointer may be NULL.

## Name

ccmn_get_ccb – allocates a CCB and fills in the common portion of the CCB header

## Syntax

ccmn_get_ccb(*dev, func_code, cam_flags, ccb_len*)
dev_t *dev*;
u_char *func_code*;
u_long *cam_flags*;
u_short *ccb_len*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*func_code* The XPT function code for the CCB. See American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186, Section 8.1.2, for a list of the function codes.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |

| Flag Name | Description |
|---|---|
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*ccb_len* The length of the CCB.

## Description

The `ccmn_get_ccb` routine allocates a CCB and fills in the common portion of the CCB header. The routine calls the `xpt_ccb_alloc` routine to allocate a CCB structure. The `ccmn_get_ccb` routine fills in the common portion of the CCB header and returns a pointer to that CCB_HEADER.

## Return Value

Pointer to newly allocated CCB header.

## See Also

`xpt_ccb_alloc`

## Name

ccmn_get_dbuf – allocates a data buffer area of the size specified by calling the kernel memory allocation routines

## Syntax

ccmn_get_dbuf(*size*)
u_long *size*;

## Arguments

*size* Size of buffer in bytes.

## Description

The `ccmn_get_dbuf` routine allocates a data buffer area of the size specified by calling the kernel memory allocation routines .

## Return Value

Pointer to kernel data space. If this is NULL, no data buffer structures are available and no more can be allocated.

## Name

ccmn_init – initializes the XPT and the unit table lock structure

## Syntax

ccmn_init ()

## Description

The `ccmn_init` routine initializes the XPT and the unit table lock structure. The first time the `ccmn_init` routine is called, it calls the `xpt_init` routine to request the XPT to initialize the CAM subsystem.

## Return Value

None

## See Also

`xpt_init`

## Name

ccmn_io_ccb_bld – allocates a SCSI I/O CCB and fills it in

## Syntax

ccmn_io_ccb_bld(*dev, data_addr, data_len, sense_len, cam_flags, comp_func,* \
*tag_action, timeout, bp*)
dev_t *dev*;
u_char **data_addr*;
u_long *data_len*;
u_short *sense_len*;
u_long *cam_flags*;
void (**comp_func*) ();
u_char *tag_action*;
u_long *timeout*;
struct buf **bp*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*data_addr* Pointer to the data buffer.

*data_len* Size of the data transfer.

*sense_len* Length of the sense data buffer to be returned on autosense, which is predefined as 64 bytes in the DEC_AUTO_SENSE_SIZE environment variable but can be larger.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |

| Flag Name | Description |
|---|---|
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*comp_func* SCSI device driver I/O callback completion function. This pointer may be NULL if the CAM DISABLE CALLBACK bit is set in the CAM FLAGS field.

*tag_action* Type of action to perform for tagged requests:

| | |
|---|---|
| CAM_SIMPLE_QTAG | Tag for simple queue |
| CAM_HEAD_QTAG | Tag for head of queue |
| CAM_ORDERED_QTAG | Tag for ordered queue |

*timeout* Timeout for the request in seconds. A value of 0 (zero) indicates the default, which is five seconds.

*bp* A `buf` structure pointer, which is used for request mapping. This pointer may be NULL.

## Description

The `ccmn_io_ccb_bld` routine allocates a SCSI I/O CCB and fills it in. The routine calls the `ccmn_get_ccb` routine to obtain a CCB structure with the header portion filled in. The `ccmn_io_ccb_bld` routine fills in the SCSI I/O-specific fields from the parameters passed and checks the length of the sense data to see if it exceeds the length of the reserved sense buffer. If it does, a sense buffer is allocated using the `ccmn_get_dbuf` routine.

## Return Value

Pointer to a SCSI I/O CCB

## See Also

`ccmn_get_ccb`, `ccmn_get_dbuf`

## Name

ccmn_mode_select – creates a SCSI I/O CCB for the MODE SELECT command and sends it to the XPT for processing

## Syntax

ccmn_mode_select(*pd*, *sense_len*, *cam_flags*, *comp_func*, *tag_action*, *timeout*, *ms_index*)

```
PDRV_DEVICE   *pd;
u_short       sense_len;
u_long        cam_flags;
void          (*comp_func) ();
u_char        tag_action;
u_long        timeout;
unsigned      ms_index;
```

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

*sense_len* Length of the sense data buffer to be returned on autosense, which is predefined as 64 bytes in the DEC_AUTO_SENSE_SIZE environment variable but can be larger.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |

| Flag Name | Description |
|---|---|
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*comp_func* SCSI device driver I/O callback completion function. This pointer may be NULL if the CAM DISABLE CALLBACK bit is set in the CAM FLAGS field.

*tag_action* Type of action to perform for tagged requests:

| | |
|---|---|
| CAM_SIMPLE_QTAG | Tag for simple queue |
| CAM_HEAD_QTAG | Tag for head of queue |
| CAM_ORDERED_QTAG | Tag for ordered queue |

*timeout* Timeout for the request in seconds. A value of 0 (zero) indicates the default, which is five seconds.

*ms_index* An index into a page in the Mode Select Table that is pointed to in the Device Descriptor Structure.

## Description

The `ccmn_mode_select` routine creates a SCSI I/O CCB for the MODE SELECT command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete. The routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. It uses the *ms_index* parameter to index into the Mode Select Table pointed to by the `dd_modsel_tbl` member of the Device Descriptor Structure for

the SCSI device. The `ccmn_mode_select` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

## Return Value

CCB_SCSIIO pointer

## See Also

`ccmn_io_ccb_bld`, `ccmn_send_ccb`

## Name

ccmn_open_unit – handles the common open for all SCSI/CAM peripheral device drivers

## Syntax

ccmn_open_unit(*dev, scsi_dev_type, flag, dev_size*)
dev_t *dev*;
u_long *scsi_dev_type*;
u_long *flag*;
u_long *dev_size*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*scsi_dev_type*
SCSI device type value from Inquiry data.

*flag* Indicates whether or not the device is being opened for exclusive use. A setting of 1 means exclusive use; a setting of 0 (zero) means nonexclusive use.

*dev_size* The device-specific structure size in bytes.

## Description

The `ccmn_open_unit` routine handles the common open for all SCSI/CAM peripheral device drivers. It must be called for each open before any SCSI device-specific open code is executed.

On the first call to the `ccmn_open_unit` routine for a device, the `ccmn_gdev_ccb_bld` routine is called to issue a GET DEVICE TYPE CCB to obtain the Inquiry data. The `ccmn_open_unit` routine allocates the Peripheral Device Structure, PDRV_DEVICE, and a device-specific structure, either TAPE_SPECIFIC or DISK_SPECIFIC, based on the device size argument passed. The routine also searches the `cam_devdesc_tab` to obtain a pointer to the Device Descriptor Structure for the SCSI device and increments the open count. The statically allocated `pdrv_unit_table` structure contains a pointer to the PDRV_DEVICE structure. The PDRV_DEVICE structure contains pointers to the DEV_DESC structure and to the device-specific structure.

## Return Value

The `ccmn_open_unit` routine returns a value of 0 (zero) upon successful completion.

## Diagnostics

The `ccmn_open_unit` routine fails under the following conditions:

| | |
|---|---|
| [EBUSY] | The device is already opened and the exclusive use bit is set. |
| [ENXIO] | The device does not exist. |
| [EINVAL] | The *scsi_dev_type* parameter does not match the device type in the Inquiry data returned by GET DEVICE TYPE CCB. The *scsi_dev_type* was not configured. |

## See Also

`ccmn_close_unit`, `ccmn_gdev_ccb_bld`

## Name

ccmn_pinq_ccb_bld – creates a PATH INQUIRY CCB and sends it to the XPT

## Syntax

ccmn_pinq_ccb_bld(*dev*, *cam_flags*)
dev_t *dev*;
u_long *cam_flags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |

| Flag Name | Description |
|---|---|
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

## Description

The ccmn_pinq_ccb_bld routine creates a PATH INQUIRY CCB and sends it to the XPT. The routine calls the ccmn_get_ccb routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the ccmn_send_ccb routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_PATHINQ pointer

## See Also

ccmn_get_ccb, ccmn_send_ccb

## Name

ccmn_rel_bp – deallocates a `buf` structure

## Syntax

ccmn_rel_bp(*bp*)
struct buf **bp*;

## Arguments

*bp* A `buf` structure pointer, which is used for request mapping.

## Description

The `ccmn_rel_bp` routine deallocates a `buf` structure.

## Return Value

None

## Name

ccmn_rel_ccb – releases a CCB and returns the sense data buffer for SCSI I/O CCBs, if allocated

## Syntax

ccmn_rel_ccb(*ccb*)
CCB_HEADER **ccb*;

## Arguments

*ccb* Pointer to the CAM Control Block (CCB) header structure to be released.

## Description

The `ccmn_rel_ccb` routine releases a CCB and returns the sense data buffer for SCSI I/O CCBs, if allocated. The routine calls the `xpt_ccb_free` routine to release a CCB structure. For SCSI I/O CCBs, if the sense data length is greater than the default sense data length, the `ccmn_rel_ccb` routine calls the `ccmn_rel_dbuf` routine to return the sense data buffer to the data buffer pool.

## Return Value

None

## See Also

`ccmn_rel_dbuf`, `xpt_ccb_free`

## Name

ccmn_rel_dbuf – deallocates a data buffer

## Syntax

ccmn_rel_dbuf(*addr*)
caddr_t *addr*;

## Arguments

*addr* Address of the data buffer to deallocate.

## Description

The `ccmn_rel_dbuf` routine deallocates a data buffer.

## Return Value

None

## Name

ccmn_rem_ccb – removes a SCSI I/O CCB request from the SCSI/CAM peripheral driver active queue and starts a tagged request if a tagged CCB is pending

## Syntax

ccmn_rem_ccb(*pd*,*ccb*)
PDRV_DEVICE **pd*;
CCB_SCSIIO **ccb*;

## Arguments

| | |
|---|---|
| *pd* | Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system. |
| *ccb* | Pointer to the SCSI I/O CCB structure to remove from the active queue. |

## Description

The `ccmn_rem_ccb` routine removes a SCSI I/O CCB request from the SCSI/CAM peripheral driver active queue and starts a tagged request if a tagged CCB is pending. If a tagged CCB is pending, the `ccmn_rem_ccb` routine places the request on the active queue and calls the `xpt_action` routine to start the tagged request.

## Return Value

None

## See Also

`xpt_action`

## Name

ccmn_rsq_ccb_bld – creates a RELEASE SIM QUEUE CCB and sends it to the XPT

## Syntax

ccmn_rsq_ccb_bld(*dev*, *cam_flags*)
dev_t *dev*;
u_long *cam_flags*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |

| Flag Name | Description |
|---|---|
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

## Description

The ccmn_rsq_ccb_bld routine creates a RELEASE SIM QUEUE CCB and sends it to the XPT. The routine calls the ccmn_get_ccb routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine calls the ccmn_send_ccb routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_RELSIM pointer

## See Also

ccmn_get_ccb, ccmn_send_ccb

## Name

ccmn_sasy_ccb_bld – creates a SET ASYNCHRONOUS CALLBACK CCB and sends it to the XPT

## Syntax

ccmn_sasy_ccb_bld(*dev*, *cam_flags*, *async_flags*, *callb_func*, *buf*, *buflen*)
dev_t *dev*;
u_long *cam_flags*;
u_long *async_flags*;
void (**callb_func*) ();
u_char **buf*;
u_char *buflen*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |

| Flag Name | Description |
|---|---|
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*async_flags* Asynchronous Callback CCB flags for registering a callback routine for a specific bus, target, and LUN. The flags are defined in the `/usr/sys/h/cam.h` file.

*callb_func* Asynchronous callback function.

*buf* SCSI/CAM peripheral buffer for asynchronous information.

*buflen* Allocated SCSI/CAM peripheral buffer length.

## Description

The `ccmn_sasy_ccb_bld` routine creates a SET ASYNCHRONOUS CALLBACK CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the asynchronous fields of the CCB and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_SETASYNC pointer

## See Also

`ccmn_get_ccb`, `ccmn_send_ccb`

## Name

ccmn_sdev_ccb_bld – creates a SET DEVICE TYPE CCB and sends it to the XPT

## Syntax

ccmn_sdev_ccb_bld(*dev, cam_flags, scsi_dev_type*)
dev_t *dev*;
u_long *cam_flags*;
u_char *scsi_dev_type*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |

| Flag Name | Description |
|---|---|
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*scsi_dev_type*
SCSI device type value from Inquiry data.

## Description

The `ccmn_sdev_ccb_bld` routine creates a SET DEVICE TYPE CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the device type field of the CCB and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_SETDEV pointer

## See Also

`ccmn_get_ccb`, `ccmn_send_ccb`

## Name

ccmn_send_ccb – sends CCBs to the XPT layer by calling the `xpt_action` routine

## Syntax

ccmn_send_ccb(*pd*,*ccb*, *retry*)
PDRV_DEVICE **pd*;
CCB_HEADER **ccb*;
u_char *retry*

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

*ccb* Pointer to the CAM Control Block (CCB) header structure to be sent to the `xpt_action` routine to handle the request.

*retry* Indicates whether this request is a retry of a request that is already on the active queue. A 1 indicates RETRY, and a 0 (zero) indicates NOT_RETRY.

## Description

The `ccmn_send_ccb` routine sends CCBs to the XPT layer by calling the `xpt_action` routine. This routine must be called with the Peripheral Device Structure locked.

For SCSI I/O CCBs that are not retries, the request is placed on the active queue. If the CCB is a tagged request and the tag queue size for the device has been reached, the request is placed on the tagged pending queue so that the request can be sent to the XPT at a later time. A high-water mark of half the queue depth for the SCSI device is used for tagged requests so that other initiators on the SCSI bus will not be blocked from using the device.

## Return Value

Value returned from the `xpt_action` routine.

## See Also

`xpt_action`

## Name

ccmn_start_unit – creates a SCSI I/O CCB for the START UNIT command and sends it to the XPT for processing

## Syntax

ccmn_start_unit(*pd, sense_len, cam_flags, comp_func, tag_action, timeout*)
PDRV_DEVICE **pd*;
u_short *sense_len*;
u_long *cam_flags*;
void (**comp_func*) ();
u_char *tag_action*;
u_long *timeout*;

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

*sense_len* Length of the sense data buffer to be returned on autosense, which is predefined as 64 bytes in the DEC_AUTO_SENSE_SIZE environment variable but can be larger.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |

| Flag Name | Description |
|---|---|
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*comp_func* SCSI device driver I/O callback completion function. This pointer may be NULL if the CAM DISABLE CALLBACK bit is set in the CAM FLAGS field.

*tag_action* Type of action to perform for tagged requests:

| | |
|---|---|
| CAM_SIMPLE_QTAG | Tag for simple queue |
| CAM_HEAD_QTAG | Tag for head of queue |
| CAM_ORDERED_QTAG | Tag for ordered queue |

*timeout* Timeout for the request in seconds. A value of 0 (zero) indicates the default, which is five seconds.

## Description

The `ccmn_start_unit` routine creates a SCSI I/O CCB for the START UNIT command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete.

The `ccmn_start_unit` routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. The `ccmn_start_unit` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

## Return Value

CCB_SCSIIO pointer

## See Also

`ccmn_io_ccb_bld`, `ccmn_send_ccb`

## Name

ccmn_term_ccb_bld – creates a TERMINATE I/O CCB and sends it to the XPT

## Syntax

ccmn_term_ccb_bld(*dev, cam_flags, term_ccb*)
dev_t *dev*;
u_long *cam_flags*;
CCB_HEADER **term_ccb*;

## Arguments

*dev* The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |

| Flag Name | Description |
|---|---|
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*term_ccb* Pointer to the CAM Control Block (CCB) header structure to terminate.

## Description

The `ccmn_term_ccb_bld` routine creates a TERMINATE I/O CCB and sends it to the XPT. The routine calls the `ccmn_get_ccb` routine to allocate a CCB structure and fill in the common portion of the CCB header. The routine fills in the CCB to be terminated and calls the `ccmn_send_ccb` routine to send the CCB structure to the XPT. The request is carried out immediately, so it is not placed on the device driver's active queue.

## Return Value

CCB_TERMIO pointer

## See Also

`ccmn_get_ccb`, `ccmn_send_ccb`

## Name

ccmn_term_que – sends a TERMINATE I/O CCB request for each SCSI I/O CCB on the active queue

## Syntax

ccmn_term_que(*pd*)
PDRV_DEVICE **pd*;

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

## Description

The `ccmn_term_que` routine sends a TERMINATE I/O CCB request for each SCSI I/O CCB on the active queue. This routine must be called with the Peripheral Device Structure locked.

The `ccmn_term_que` routine calls the `ccmn_term_ccb_bld` routine to create a TERMINATE I/O CCB for the first active CCB on the active queue and send it to the XPT. It calls the `ccmn_send_ccb` routine to send the TERMINATE I/O CCB for each of the other CCBs on the active queue that are marked as active to the XPT. The `ccmn_term_que` routine then calls the `ccmn_rel_ccb` routine to return the TERMINATE I/O CCB to the XPT.

## Return Value

None

## See Also

`ccmn_rel_ccb`, `ccmn_send_ccb`

## Name

ccmn_tur – creates a SCSI I/O CCB for the TEST UNIT READY command and sends it to the XPT for processing

## Syntax

ccmn_tur(*pd*, *sense_len, cam_flags, comp_func, tag_action, timeout*)
PDRV_DEVICE **pd*;
u_short *sense_len*;
u_long *cam_flags*;
void (**comp_func*) ();
u_char *tag_action*;
u_long *timeout*;

## Arguments

*pd* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

*sense_len* Length of the sense data buffer to be returned on autosense, which is predefined as 64 bytes in the DEC_AUTO_SENSE_SIZE environment variable but can be larger.

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |

| Flag Name | Description |
|---|---|
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

*comp_func* SCSI device driver I/O callback completion function. This pointer may be NULL if the CAM DISABLE CALLBACK bit is set in the CAM FLAGS field.

*tag_action* Type of action to perform for tagged requests:

| | |
|---|---|
| CAM_SIMPLE_QTAG | Tag for simple queue |
| CAM_HEAD_QTAG | Tag for head of queue |
| CAM_ORDERED_QTAG | Tag for ordered queue |

*timeout* Timeout for the request in seconds. A value of 0 (zero) indicates the default, which is five seconds.

## Description

The `ccmn_tur` routine creates a SCSI I/O CCB for the TEST UNIT READY command and sends it to the XPT for processing. This routine may be called from interrupt context since it will not wait (sleep) for the command to complete.

The `ccmn_tur` routine calls the `ccmn_io_ccb_bld` routine to obtain a SCSI I/O CCB structure. The `ccmn_tur` routine calls the `ccmn_send_ccb` routine to send the SCSI I/O CCB to the XPT.

## Return Value

CCB_SCSIIO pointer

## See Also

`ccmn_io_ccb_bld`, `ccmn_send_ccb`

## Name

cdbg_CamFunction – reports CAM XPT function codes

## Syntax

char * cdbg_CamFunction(*cam_function*, *report_format*)
register u_char *cam_function*;
int *report_format*;

## Arguments

*cam_function* The entry from the CAM XPT Function Code Table.

*report_format* The format of the message text returned, which can be CDBG_BRIEF or CDBG_FULL.

## Description

The `cdbg_CamFunction` routine reports CAM XPT function codes. Program constants are defined to allow either the function code name only or a brief explanation to be printed. The XPT function codes are defined in the `/usr/sys/h/cam.h` file.

## Return Value

Returns a character pointer to a text string.

## Name

cdbg_CamStatus – decodes CAM CCB status codes

## Syntax

char * cdbg_CamStatus(*cam_status*, *report_format*)
register u_char *cam_status*;
int *report_format*;

## Arguments

*cam_status* The information from the CAM SCSI I/O CCB.

*report_format* The format of the message text returned, which can be CDBG_BRIEF or CDBG_FULL.

## Description

The `cdbg_CamStatus` routine decodes CAM CCB status codes. Program constants are defined to allow either the status code name only or a brief explanation to be printed. The CAM status codes are defined in the `/usr/sys/h/cam.h` file.

## Return Value

Returns a character pointer to a text string.

## Name

cdbg_DumpABORT – dumps the contents of an ABORT CCB

## Syntax

void cdbg_DumpABORT(*ccb*)
register CCB_ABORT ***ccb*;

## Arguments

*ccb* Pointer to the ABORT CCB.

## Description

The `cdbg_DumpABORT` routine dumps the contents of an ABORT CCB. The ABORT CCB is defined in the `/usr/sys/h/cam.h` file.

## Return Value

None

## Name

void cdbg_DumpBuffer – dumps the contents of a data buffer in hexadecimal bytes

## Syntax

```
void cdbg_DumpBuffer(buffer, size)
char          *buffer;
register int  size;
```

## Arguments

| | |
|---|---|
| *buffer* | SCSI/CAM peripheral buffer pointer. |
| *size* | Size of buffer in bytes. |

## Description

The `cdbg_DumpBuffer` routine dumps the contents of a data buffer in hexadecimal bytes. The calling routine must display a header line. The format of the dump is 16 bytes per line.

## Return Value

None

## Name

cdbg_DumpCCBHeader – dumps the contents of a CAM Control Block (CCB) header structure

## Syntax

void cdbg_DumpCCBHeader(*ccb*)
register CCB_HEADER ***ccb*;

## Arguments

*ccb* Pointer to the CAM Control Block (CCB) header structure.

## Description

The `cdbg_DumpCCBHeader` routine dumps the contents of a CAM Control Block (CCB) header structure. The CAM Control Block (CCB) header structure is defined in the `/usr/sys/h/cam.h` file.

## Return Value

None

## Name

cdbg_DumpCCBHeaderFlags – dumps the contents of the `cam_flags` member of a CAM Control Block (CCB) header structure

## Syntax

void cdbg_DumpCCBHeaderFlags(*cam_flags*)
register u_long *cam_flags*;

## Arguments

*cam_flags* The *cam_flags* flag names and their bit definitions are listed in the table that follows:

| Flag Name | Description |
|---|---|
| CAM_DIR_RESV | Data direction (00: reserved) |
| CAM_DIR_IN | Data direction (01: DATA IN) |
| CAM_DIR_OUT | Data direction (10: DATA OUT) |
| CAM_DIR_NONE | Data direction (11: no data) |
| CAM_DIS_AUTOSENSE | Disable autosense feature |
| CAM_SCATTER_VALID | Scatter/gather list is valid |
| CAM_DIS_CALLBACK | Disable callback feature |
| CAM_CDB_LINKED | CCB contains linked CDB |
| CAM_QUEUE_ENABLE | SIM queue actions are enabled |
| CAM_CDB_POINTER | CDB field contains pointer |
| CAM_DIS_DISCONNECT | Disable disconnect |
| CAM_INITIATE_SYNC | Attempt synchronous data transfer, after issuing Synchronous Data Transfer Request (SDTR) |
| CAM_DIS_SYNC | Disable synchronous mode, go to asynchronous |
| CAM_SIM_QHEAD | Place CCB at head of SIM queue |
| CAM_SIM_QFREEZE | Return SIM queue to frozen state |
| CAM_ENG_SYNC | Flush residual bytes from HBA data engine before terminating I/O |
| CAM_ENG_SGLIST | Scatter/gather list is for HBA engine |
| CAM_CDB_PHYS | CDB pointer is physical address |
| CAM_DATA_PHYS | Scatter/gather/buffer data pointers are physical address |
| CAM_SNS_BUF_PHYS | Autosense data pointer is physical address |
| CAM_MSG_BUF_PHYS | Message buffer pointer is physical address |

| Flag Name | Description |
|---|---|
| CAM_NXT_CCB_PHYS | Next CCB pointer is physical address |
| CAM_CALLBCK_PHYS | Callback function pointer is physical address |
| CAM_DATAB_VALID | Data buffer valid |
| CAM_STATUS_VALID | Status buffer valid |
| CAM_MSGB_VALID | Message buffer valid |
| CAM_TGT_PHASE_MODE | SIM will run in phase mode |
| CAM_TGT_CCB_AVAIL | Target CCB available |
| CAM_DIS_AUTODISC | Disable autodisconnect |
| CAM_DIS_AUTOSRP | Disable autosave/restore pointers |

## Description

The `cdbg_DumpCCBHeaderFlags` routine dumps the contents of the `cam_flags` member of a CAM Control Block (CCB) header structure. The CAM Control Block (CCB) header structure is defined in the `/usr/sys/h/cam.h` file.

## Return Value

None

## Name

cdbg_DumpInquiryData – dumps the contents of an ALL_INQ_DATA structure

## Syntax

void cdbg_DumpInquiryData(*inquiry*)
register ALL_INQ_DATA **inquiry*;

## Arguments

*inquiry* Pointer to the ALL_INQ_DATA structure.

## Description

The `cdbg_DumpInquiryData` routine dumps the contents of an ALL_INQ_DATA structure. The ALL_INQ_DATA structure is defined in the `/usr/sys/h/scsi_all.h` file.

## Return Value

None

## Name

cdbg_DumpPDRVws – dumps the contents of a SCSI/CAM Peripheral Device Driver Working Set Structure

## Syntax

void cdbg_DumpPDRVws(*pws*)
register PDRV_WS **pws*;

## Arguments

*pws* Pointer to the SCSI/CAM Peripheral Device Driver Working Set Structure.

## Description

The `cdbg_DumpPDRVws` routine dumps the contents of a SCSI/CAM Peripheral Device Driver Working Set Structure. The SCSI/CAM Peripheral Device Driver Working Set Structure is defined in the `/usr/sys/h/pdrv.h` file.

## Return Value

None

## Name

cdbg_DumpSCSIIO – dumps the contents of a SCSI I/O CCB

## Syntax

void cdbg_DumpSCSIIO(*ccb*)
register CCB_SCSIIO ***ccb*;

## Arguments

*ccb* Pointer to the SCSI I/O CCB structure.

## Description

The `cdbg_DumpSCSIIO` routine dumps the contents of a SCSI I/O CCB. The SCSI I/O CCB is defined in the `/usr/sys/h/cam.h` file.

## Return Value

None

## Name

cdbg_DumpTERMIO – dumps the contents of a TERMINATE I/O CCB

## Syntax

void cdbg_DumpTERMIO(*ccb*)
register CCB_TERMIO ***ccb*;

## Arguments

*ccb* Pointer to the TERMINATE I/O CCB.

## Description

The `cdbg_DumpTERMIO` routine dumps the contents of a TERMINATE I/O CCB. The TERMINATE I/O CCB is defined in the `/usr/sys/h/cam.h` file.

## Return Value

None

## Name

cdbg_GetDeviceName – returns a pointer to a character string describing the `dtype` member of an ALL_INQ_DATA structure

## Syntax

char * cdbg_GetDeviceName(*device_type*)
register *device_type*;

## Arguments

*device_type* SCSI device type value from Inquiry data.

## Description

The `cdbg_GetDeviceName` routine returns a pointer to a character string describing the `dtype` member of an ALL_INQ_DATA structure. The ALL_INQ_DATA structure is defined in the `/usr/sys/h/scsi_all.h` file.

## Return Value

Returns a character pointer to a text string.

## Name

cdbg_ScsiStatus – reports SCSI status codes

## Syntax

char * cdbg_ScsiStatus(*scsi_status, report_format*)
register u_char *scsi_status*;
int *report_format*;

## Arguments

*scsi_status* The SCSI status from the CAM SCSI I/O CCB.

*report_format*
The format of the message text returned, which can be CDBG_BRIEF or CDBG_FULL.

## Description

The `cdbg_ScsiStatus` routine reports SCSI status codes. Program constants are defined to allow either the status code name only or a brief explanation to be printed. The SCSI status codes are defined in the `/usr/sys/h/scsi_status.h` file.

## Return Value

Returns a character pointer to a text string.

## Name

cdbg_SystemStatus – reports system error codes

## Syntax

char * cdbg_SystemStatus(*errno*)
int *errno*;

## Arguments

*errno* The error number.

## Description

The cdbg_SystemStatus routine reports system error codes. The system error codes are defined in the `/usr/sys/h/errno.h` file.

## Return Value

Returns a character pointer to a text string.

## Name

cgen_async – handles notification of asynchronous events

## Syntax

void cgen_async(*opcode, path_id, target, lun, buf_ptr, data_cnt*)
u_long *opcode*;
u_char *path_id*;
u_char *target*;
u_char *lun*;
caddr_t *buf_ptr*;
u_char *data_cnt*;

## Arguments

| | |
|---|---|
| *opcode* | SCSI asynchronous callback operation code. |
| *path_id* | SCSI target's bus controller number. |
| *target* | SCSI target's ID number. |
| *lun* | SCSI target's logical unit number. |
| *buf_ptr* | Buffer address for Asynchronous Event Notification (AEN). |
| *data_cnt* | Number of bytes the XPT had to transfer from the SIM's buffer or the limit of the SCSI/CAM peripheral buffer. |

## Description

The `cgen_async` routine handles notification of asynchronous events. The routine is called when an Asynchronous Event Notification(AEN), Bus Device Reset (BDR), or Bus Reset (BR) occurs. The routine sets the CGEN_RESET_STATE flag and clears the CGEN_RESET_PEND_STATE flag for BDRs and bus resets. The routine sets the CGEN_UNIT_ATTEN_STATE flag for AENs.

## Return Value

None

## Name

cgen_attach – called for each bus, target, and LUN after the `cgen_slave` routine returns SUCCESS

## Syntax

cgen_attach(*ui*)
struct uba_device **ui*;

## Arguments

| | |
|---|---|
| *ui* | Pointer to the device information contained in the `uba_device` structure. |

## Description

The `cgen_attach` routine is called for each bus, target, and LUN after the `cgen_slave` routine returns SUCCESS. The routine calls the `ccmn_open_unit` routine, passing the bus, target, and LUN information.

The `cgen_attach` routine calls the `ccmn_close_unit` routine to close the device. If a device of the specified type is found, the device identification string is printed. See the *Guide to Writing and Porting VMEbus and TURBOchannel Device Drivers* for more information.

## Return Value

PROBE_FAILURE
PROBE_SUCCESS

## See Also

`ccmn_close_unit` , `ccmn_open_unit` , `cgen_slave`

## Name

cgen_ccb_chkcond – decodes the autosense data for a device driver

## Syntax

cgen_ccb_chkcond(*pdrv_dev, ccb*)
PDRV_DEVICE **pdrv_dev*;
CCB_SCSIIO **ccb*;

## Arguments

*pdrv_dev* Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system.

*ccb* Pointer to the SCSI I/O CCB structure.

## Description

The `cgen_ccb_chkcond` routine decodes the autosense data for a device driver and returns the appropriate status to the calling routine. The routine is called when a SCSI I/O CCB is returned with a CAM status of CAM_REQ_CMP_ERR (request completed with error) and a SCSI status of SCSI_STAT_CHECK_CONDITION. The routine also sets the appropriate flags in the Generic-Specific Structure.

## Return Value

An integer indicating one of the following values:

| Flag Name | Description |
|---|---|
| `CHK_CHK_NOSENSE` | Request sense did not complete without error. Sense buffer contents cannot be used to determine error condition. |
| `CHK_SENSE_NOT_VALID` | Valid bit in sense buffer is not set; sense data is useless. |
| `CHK_EOM` | End of media detected. |
| `CHK_FILEMARK` | Filemark detected. |
| `CHK_ILI` | Incorrect record length detected. |
| `CHK_NOSENSE_BITS` | Sense key equals no sense, but there are no bits set in byte 2 of sense data. |
| `CHK_SOFTERR` | Soft error detected; corrected by unit. |
| `CHK_NOT_READY` | Unit is not ready. |
| `CHK_HARDERR` | Unit has detected a hard error. |
| `CHK_UNIT_ATTEN` | Unit has either had media change or just powered up. |

| Flag Name | Description |
|---|---|
| CHK_DATA_PROT | Unit is write protected. |
| CHK_UNSUPPORTED | Sense key that is unsupported has been returned. |
| CHK_CMD_ABORTED | Unit aborted this command. |
| CHK_INFORMATIONAL | Unit is reporting informational message. |
| CHK_UNKNOWN_KEY | Unit has returned sense key that is not supported by SCSI 2 specification. |

## Name

cgen_close – closes the device

## Syntax

cgen_close(*dev*, *flags*)
dev_t *dev*;
int *flags*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *flags* | Flags set when a file is open. |

## Description

The `cgen_close` routine closes the device. The routine checks any device flags that are defined to see if action is required, such as rewind on close or release the unit. The `cgen_close` closes the device by calling the `ccmn_close_unit` routine.

## Return Value

The `cgen_close` routine returns GENERIC_SUCCESS upon successful completion.

## Diagnostics

The `cgen_close` routine fails under the following condition:

[ENOMEM] Resource problem

## See Also

`ccmn_close_unit`

## Name

cgen_done – the entry point for all nonread and nonwrite I/O callbacks

## Syntax

cgen_done(*ccb*)
CCB_SCSIIO **ccb*;

## Arguments

*ccb* Pointer to the SCSI I/O CCB structure.

## Description

The `cgen_done` routine is the the entry point for all nonread and nonwrite I/O callbacks. The generic device driver uses two callback entry points, one for all nonuser I/O requests and one for all user I/O requests. The SCSI/CAM peripheral device driver writer can declare multiple callback routines for each type of command and can fill the CCB with the address of the appropriate callback routine.

This is a generic routine for all nonread and nonwrite SCSI I/O CCBs. The SCSI I/O CCB should not contain a pointer to a `buf` structure in the `cam_req_map` member of the structure. If it does, then a wake-up call is issued on the address of the CCB and the error is reported. If the SCSI I/O CCB does not contain a pointer to a `buf` structure in the `cam_req_map` member, then a wake-up call is issued on the address of the CCB and the CCB is removed from the active queques. No CCB completion status is checked because that is the responsibility of the routine that created the CCB and is waiting for completion status. When this routine is entered, context is on the interrupt stack and the driver cannot sleep waiting for an event.

## Return Value

None

## Name

cgen_ioctl – handles user process requests for specific actions other than read, write, open, or close for SCSI tape devices

## Syntax

cgen_ioctl(*dev, cmd, data, flags*)
dev_t *dev*;
int *cmd*;
caddt_t *data*;
int *flags*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *cmd* | The ioctl command, UAGT_CAM_IO. |
| *data* | Pointer to the kernel copy of the structure passed by the user process. |
| *flags* | User process flags. |

## Description

The `cgen_ioctl` routine handles user process requests for specific actions other than read, write, open, or close for SCSI tape devices. The routine currently issues a DEVIOCGET `ioctl` command for the device, which fills out the `devget` structure passed in, and then calls the `cgen_mode_sns` routine which issues a SCSI_MODE_SENSE to the device to determine the device's state. The routine then calls the `ccmn_rel_ccb` routine to release the CCB. When the call to `cgen_mode_sns` completes, the `cgen_ioctl` routine fills out the rest of the `devget` structure based on information contained in the mode sense data.

## Return Value

[EINVAL] The device does not exist.

## See Also

`ccmn_rel_ccb` , `cgen_mode_sns` , `ioctl`(2)

## Name

cgen_iodone – the entry point for all read and write I/O callbacks

## Syntax

cgen_iodone(*ccb*)
CCB_SCSIIO **ccb*;

## Arguments

*ccb* Pointer to the SCSI I/O CCB structure.

## Description

The `cgen_iodone` routine is the entry point for all read and write I/O callbacks. This is a generic routine for all read and write SCSI I/O CCBs. The SCSI I/O CCB should contain a pointer to a `buf` structure in the `cam_req_map` member of the structure. If it does not, then a wake-up call is issued on the address of the CCB and the error is reported. If the SCSI I/O CCB does contain a pointer to a `buf` structure in the `cam_req_map` member, as it should, then the completion status is decoded. Depending on the CCB's completion status, the correct fields within the `buf` structure are filled out.

The device's active queues may need to be aborted because of errors or because the device is a sequential access device and the transaction was an asynchronous request.

The CCB is removed from the active queques by a call to the `ccmn_rem_ccb` routine and is released back to the free CCB pool by a call to the `ccmn_rel_ccb` routine. When the `cgen_iodone` routine is entered, context is on the interrupt stack and the driver cannot sleep waiting for an event.

## Return Value

None

## See Also

`ccmn_rem_ccb` , `ccmn_rel_ccb`

## Name

cgen_minphys – compares the `b_bcount` with the maximum transfer limit for the device

## Syntax

cgen_minphys(*bp*)
register struct buf **bp*;

## Arguments

*bp* A `buf` structure pointer, which is used for request mapping.

## Description

The `cgen_minphys` routine compares the `b_bcount` with the maximum transfer limit for the device. The routine compares the `b_bcount` field in the `buf` structure with the maximum transfer limit for the device in the Device Descriptor Structure. The count is adjusted if it is greater than the limit.

## Return Value

None

## Name

cgen_mode_sns – issues a SCSI_MODE_SENSE command to the unit defined

## Syntax

cgen_mode_sns(*pdrv_dev, action, done, page_code, page_ctrl, sleep*)
PDRV_DEVICE **pdrv_dev*;
CGEN_ACTION **action*;
void (**done*) ();
u_char *page_code*;
u_char *page_ctrl*;
u_long *sleep*;

## Arguments

| | |
|---|---|
| *pdrv_dev* | Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system. |
| *action* | Pointer to the caller's Generic Action Structure. |
| *done* | The address of the completion routine to be called when the SCSI command completes. |
| *page_code* | The user process's target page. |
| *page_ctrl* | The page control settings field. |
| *sleep* | Whether or not the GENERIC_SLEEP flag is set. |

## Description

The `cgen_mode_sns` routine issues a SCSI_MODE_SENSE command to the unit defined. The CGEN_ACTION structure is filled in for the calling routine based on the completion status of the CCB.

## Return Value

NULL – command could not be issued
CCB_SCSIIO pointer

## See Also

`ccmn_ccb_status`

## Name

cgen_open – called by the kernel when a user process requests an open of the device

## Syntax

cgen_open(*dev*, *flags*)
dev_t *dev*;
int *flags*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *flags* | Flags set when a file is open. |

## Description

The `cgen_open` routine is called by the kernel when a user process requests an open of the device. The `cgen_open` routine calls the `ccmn_open_unit` routine, which manages the SMP_LOCKS and, if passed the exclusive use flag for SCSI devices, makes sure that no other process has opened the device. If the `ccmn_open_unit` routine returns success, the necessary data structures are allocated.

The `cgen_open` routine calls the `ccmn_sasy_ccb_bld` routine to register for asynchronous event notification for the device. The `cgen_open` routine then enters a `for` loop based on the power-up time specified in the Device Descriptor Structure for the device. Within the loop, calls are made to the `cgen_ready` routine, which calls the `ccmn_tur` routine to issue a TEST UNIT READY command to the device.

The `cgen_open` routine calls the `ccmn_rel_ccb` routine to release the CCB. The `cgen_open` routine checks certain state flags for the device to decide whether to send the initial SCSI mode select pages to the device. Depending on the setting of the state flags CGEN_UNIT_ATTEN_STATE and CGEN_RESET_STATE, the `cgen_open` routine calls the `cgen_open_sel` routine for each mode select page to be sent to the device. The `cgen_open_sel` routine fills out the Generic Action Structure based on the completion status of the CCB for each mode select page it sends.

## Return Value

The `cgen_open` routine returns GENERIC_SUCCESS upon successful completion.

## Diagnostics

The `cgen_open` routine fails under the following conditions:

| | |
|---|---|
| [EBUSY] | The device is already opened and the exclusive use bit is set. |
| [ENOMEM] | Resource problem |
| [EINVAL] | The *scsi_dev_type* parameter does not match the device type in the Inquiry data returned by GET DEVICE TYPE CCB. The *scsi_dev_type* was not configured. |
| [ENXIO] | The device does not exist. |
| [EIO] | Check device conditions. |

## See Also

`ccmn_close_unit`, `ccmn_open_unit`, `ccmn_rel_ccb`, `ccmn_sasy_ccb_bld`, `ccmn_tur`, `cgen_open_sel`, `cgen_close`

## Name

cgen_open_sel – issues a SCSI_MODE_SELECT command to the SCSI device

## Syntax

cgen_open_sel(*pdrv_dev, action, ms_index, done, sleep*)
PDRV_DEVICE **pdrv_dev*;
CGEN_ACTION **action*;
u_long *ms_index*;
void (***done*) ();
u_long *sleep*;

## Arguments

| | |
|---|---|
| *pdrv_dev* | Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system. |
| *action* | Pointer to the caller's Generic Action Structure. |
| *ms_index* | An index into a page in the Mode Select Table that is pointed to in the Device Descriptor Structure. |
| *done* | The address of the completion routine to be called when the SCSI command completes. |
| *sleep* | Whether or not the GENERIC_SLEEP flag is set. |

## Description

The `cgen_open_sel` routine issues a SCSI_MODE_SELECT command to the SCSI device. The mode select data sent to the device is based on the data contained in the Mode Select Table Structure for the device, if one is defined. The CGEN_ACTION structure is filled in for the calling routine based on the completion status of the CCB.

The `cgen_open_sel` routine calls the `ccmn_mode_select` routine to create a SCSI I/O CCB and send it to the XPT for processing.

## Return Value

None

## See Also

`ccmn_ccb_status` , `ccmn_mode_select`

## Name

cgen_read – handles synchronous read requests for user processes

## Syntax

cgen_read(*dev, uio*)
dev_t *dev*;
struct uio **uio*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *uio* | Pointer to the device information contained in the `uio` I/O structure. |

## Description

The `cgen_read` routine handles synchronous read requests for user processes. It passes the user process requests to the `cgen_strategy` routine. The `cgen_read` routine calls the `ccmn_get_bp` routine to allocate a `buf` structure for the user process read request. When the I/O is complete, the `cgen_read` routine calls the `ccmn_rel_bp` routine to deallocate the `buf` structure.

## Return Value

The `cgen_read` routine passes the return from the `physio` routine.

## See Also

`ccmn_get_bp` , `ccmn_rel_bp` , `cgen_strategy`

## Name

cgen_ready – issues a TEST UNIT READY command to the unit defined

## Syntax

cgen_ready(*pdrv_dev*, *action*, *done*, *sleep*)
PDRV_DEVICE **pdrv_dev*;
CGEN_ACTION **action*;
void (**done*) ();
u_long *sleep*;

## Arguments

| | |
|---|---|
| *pdrv_dev* | Pointer to the CAM Peripheral Device Structure allocated for each SCSI device in the system. |
| *action* | Pointer to the caller's Generic Action Structure. |
| *done* | The address of the completion routine to be called when the SCSI command completes. |
| *sleep* | Whether or not the GENERIC_SLEEP flag is set. |

## Description

The `cgen_ready` routine issues a TEST UNIT READY command to the unit defined. The routine calls the `ccmn_tur` routine to issue the TEST UNIT READY command and sleeps waiting for command status.

## Return Value

None

## See Also

`ccmn_tur`

## Name

cgen_slave – called at system boot to initialize the lower levels

## Syntax

cgen_slave(*ui*, *reg*)
struct uba_device **ui*;
caddr_t *reg*;

## Arguments

| | |
|---|---|
| *ui* | Pointer to the device information contained in the `uba_device` structure. |
| *reg* | The virtual address of the controller. |

## Description

The `cgen_slave` routine is called at system boot to initialize the lower levels. The routine also checks the bounds for the unit number to ensure it is within the allowed range and sets the device-configured bit for the device at the specified bus, target, and LUN.

## Return Value

PROBE_FAILURE
PROBE_SUCCESS

## See Also

`ccmn_close_unit` , `ccmn_init` , `ccmn_open_unit`

## Name

cgen_strategy – handles all I/O requests for user processes

## Syntax

cgen_strategy(*bp*)
struct buf **bp*;

## Arguments

*bp* A `buf` structure pointer, which is used for request mapping.

## Description

The `cgen_strategy` routine handles all I/O requests for user processes. It performs specific checks, depending on whether the request is synchronous or asynchronous and on the SCSI device type. The `cgen_strategy` routine calls the `ccmn_io_ccb_bld` routine to obtain an initialized SCSI I/O CCB and build either a read or a write command based on the information contained in the `buf` structure. The `cgen_strategy` routine then calls the `ccmn_send_ccb` to place the CCB on the active queue and send it to the XPT layer.

## Return Value

[EINVAL]
[EIO]

## See Also

`ccmn_io_ccb_bld` , `ccmn_send_ccb` , `cgen_iodone`

## Name

cgen_write – handles synchronous write requests for user processes

## Syntax

cgen_write(*dev*, *uio*)
dev_t *dev*;
struct uio **uio*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the bus number, target ID, and LUN associated with this SCSI device. |
| *uio* | Pointer to the device information contained in the `uio` I/O structure. |

## Description

The `cgen_write` routine handles synchronous write requests for user processes. The routine passes the user process requests to the `cgen_strategy` routine. The `cgen_write` routine calls the `ccmn_get_bp` routine to allocate a `buf` structure for the user process write request. When the I/O is complete, the `cgen_write` routine calls the `ccmn_rel_bp` routine to deallocate the `buf` structure.

## Return Value

The `cgen_write` routine passes the return from the `physio` routine.

## See Also

`ccmn_get_bp` , `ccmn_rel_bp` , `cgen_strategy`

## Name

sim_action – initiates an I/O request from a SCSI/CAM peripheral device driver

## Syntax

sim_action(*ccb_hdr*)
CCB_HEADER **ccb_hdr*;

## Arguments

*ccb_hdr* Address of the header for the ccb.

## Description

The `sim_action` routine initiates an I/O request from a SCSI/CAM peripheral device driver. The routine is used by the XPT for immediate as well as for queued operations. When the operation completes, the SIM calls back directly to the peripheral driver using the CCB callback address, if callbacks are enabled and the operation is not to be carried out immediately.

The SIM determines whether an operation is to be carried out immediately or to be queued according to the function code of the CCB structure. All queued operations, such as ‘‘Execute SCSI I/O’’ (reads or writes), are placed by the SIM on a nexus-specific queue and return with a CAM status of CAM_INPROG.

Some immediate operations, as described in the American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186, may not be executed immediately. However, all CCBs to be carried out immediately return to the XPT layer immediately. For example, the ABORT CCB command does not always complete synchronously with its call; however, the CCB_ABORT is returned to the XPT immediately. An XPT_RESET_BUS CCB returns to the XPT following the reset of the bus.

## Return Value

CAM_REQ_INPROG for queued commands
CAM_REQ_CMP for immediate commands
A valid CAM error value

## See Also

American National Standard for Information Systems, *SCSI-2 Common Access Method: Transport and SCSI Interface Module*, working draft, X3T9.2/90-186

## Name

sim_init – initializes the SIM

## Syntax

sim_init(*pathid*)
u_long *pathid*;

## Arguments

*pathid* SCSI target's bus controller number.

## Description

The `sim_init` routine initializes the SIM. The SIM clears all its queues and releases all allocated resources in response to this call. This routine is called using the function address contained in the CAM_SIM_ENTRY structure. This routine can be called at any time; the SIM layer must ensure that data integrity is maintained.

## Return Value

CAM_REQ_CMP

## Name

uagt_close – handles the close of the User Agent driver

## Syntax

uagt_close(*dev*, *flag*)
dev_t *dev*;
int *flag*;

## Arguments

*dev* The major/minor device number pair that identifies the User Agent.

*flag* Unused.

## Description

The `uagt_close` routine handles the close of the User Agent driver. For the last close operation for the driver, if any queues are frozen, a RELEASE SIM QUEUE CCB is sent to the XPT layer for each frozen queue detected by the User Agent.

## Return Value

None

## See Also

`uagt_open`, `xpt_ccb_free`

## Name

uagt_ioctl – handles the `ioctl` system call for the User Agent driver

## Syntax

uagt_ioctl(*dev, cmd, data, flag*)
dev_t *dev*;
register int *cmd*;
caddr_t *data*;
int *flag*;

## Arguments

| | |
|---|---|
| *dev* | The major/minor device number pair that identifies the User Agent. |
| *cmd* | The ioctl command, UAGT_CAM_IO. |
| *data* | Pointer to the UAGT_CAM_CCB structure passed by the user process. |
| *flag* | Unused. |

## Description

The `uagt_ioctl` routine handles the `ioctl` system call for the User Agent driver. The `ioctl` commands supported are: DEVIOCGET, to obtain the User Agent driver's SCSI device status; UAGT_CAM_IO, the `ioctl` define for calls to the User Agent driver; UAGT_CAM_SINGLE_SCAN, to scan a bus, target, and LUN; and UAGT_CAM_FULL_SCAN, to scan a bus.

For SCSI I/O CCB requests, the user data area is locked before passing the CCB to the XPT. The User Agent sleeps waiting for the I/O to complete and issues a ABORT CCB if a signal is caught while sleeping.

## Return Value

The `uagt_ioctl` routine returns a value of 0 (zero) upon successful completion.

## Diagnostics

The `uagt_ioctl` routine fails under the following conditions:

| | |
|---|---|
| [EFAULT] | Copy to or from user space failed. |
| [EINVAL] | An unsupported cmd value was passed to ioctl(). The CCB copied from the user process contained an invalid XPT function code, or an invalid target or LUN. |
| [EBUSY] | The maximum allowable number of User Agent requests has been reached (MAX_UAGT_REQ). |

## See Also

ioctl(2), xpt_action, xpt_ccb_alloc

## Name

uagt_open – handles the open of the User Agent driver

## Syntax

uagt_open(*dev, flag*)
dev_t *dev*;
int *flag*;

## Arguments

*dev* The major/minor device number pair that identifies the User Agent.

*flag* Unused.

## Description

The `uagt_open` routine handles the open of the User Agent driver.

The character device special file name used for the open is `/dev/cam`.

## Return Value

The `uagt_open` routine returns a value of 0 (zero) upon successful completion.

## See Also

`uagt_close`, `xpt_init`

## Name

xpt_action – calls the appropriate XPT/SIM routine

## Syntax

```
long xpt_action  (ch)
CCB_HEADER * ch;
```

## Arguments

*ch* Specifies a pointer to the CAM Control Block (CCB) on which to act.

## Description

The `xpt_action` routine calls the appropriate XPT/SIM routine. The routine routes the specified CCB to the appropriate SIM module or to the Configuration driver, depending on the CCB type and on the path ID specified in the CCB. Vendor-unique CCBs are also supported. Those CCBs are passed to the appropriate SIM module according to the path ID specified in the CCB.

## Return Value

Upon completion, the `xpt_action` routine returns a valid CAM status value.

## See Also

`xpt_ccb_alloc`, `xpt_ccb_free`

## Name

xpt_ccb_alloc – allocates a CAM Control Block (CCB)

## Syntax

CCB_HEADER *xpt_ccb_alloc ()

## Arguments

None

## Description

The `xpt_ccb_alloc` routine allocates a CAM Control Block (CCB) for use by a SCSI/CAM peripheral device driver. The `xpt_ccb_alloc` routine returns a pointer to a preallocated data buffer large enough to contain any CCB structure. The peripheral device driver uses this structure for its XPT/SIM requests. The routine also ensures that the SIM private data space and peripheral device driver pointer, `cam_pdrv_ptr` , are set up.

## Return Value

Upon successful completion, `xpt_ccb_alloc` returns a pointer to a preallocated data buffer. The data buffer returned by `xpt_ccb_alloc` is initialized to be a SCSI I/O CCB. For other types of CCBs, some fields may have to be reinitialized for the specific CCB.

## See Also

`xpt_ccb_free`

## Name

xpt_ccb_free – frees a previously allocated CCB

## Syntax

long xpt_ccb_free(*ch*)
CCB_HEADER **ch*;

## Arguments

*ch* Specifies a pointer to the CCB to be freed. This CCB was allocated in a call to `xpt_ccb_alloc`.

## Description

The `xpt_ccb_free` routine frees a previously allocated CCB. The routine returns a CCB, previously allocated by a peripheral device driver, to the CCB pool.

## Return Value

XPT_CCB_INVALID or CAM_SUCCESS

## See Also

`xpt_ccb_alloc`

## Name

xpt_init – validates the initialized state of the CAM subsystem

## Syntax

long xpt_init()

## Arguments

None

## Description

The `xpt_init` routine validates the initialized state of the CAM subsystem. The routine initializes all global and internal variables used by the CAM subsystem through a call to the Configuration driver. Peripheral device drivers must call this routine either during or prior to their own initialization. The `xpt_init` routine simply returns to the calling SCSI/CAM peripheral device driver if the CAM subsystem was previously initialized.

## Return Value

Upon completion, `xpt_init` returns one of the following values:

| Return Value | Meaning |
|---|---|
| CAM_SUCCESS | The `xpt_init` routine initialized the CAM subsystem. |
| CAM_FAILURE | The `xpt_init` routine did not initialize the CAM subsystem and the CAM subsystem cannot be used. |

# Index


## A

**ABORT CCB (CAM)**, 5–6

## B

**BUS DEVICE RESET CCB (CAM)**, 5–6
**BUS RESET CCB (CAM)**, 5–6

## C

**CALLD macro (CAM)**, 10–1
**CAM**
common structures and routines, 1–4
Configuration driver structures and routines, 1–5
generic structures and routines, 1–5
overview, 1–1
SCSI CDROM/AUDIO device structures and commands, 1–5
SCSI disk device structures and routines, 1–5
SCSI tape device structures and routines, 1–5
SCSI/CAM peripheral drivers, 1–4
SCSI/CAM special I/O interface, 1–5
SIM SCSI Interface layer, 1–6
User Agent driver structures and routines, 1–3
XPT transport layer, 1–6
**CAM common close unit routine**
*See also* CAM open unit routine
**CAM common data structures**
introduction, 3–1
**CAM common macros**
introduction, 3–5
**CAM common routines**
introduction, 3–1, 3–6
**CAM Control Block (CAM)**, 5–1
**CAM Control Block (CCB) header structure (CAM)**, 5–2
**CAM Control Blocks**
described, 5–1t
**CAM debug macros**
described, 10–1
introduction, 10–1
**CAM debug routines**
introduction, 10–1
**CAM equipment device table (CAM)**, 6–2
**CAM error handling**
CAM_ERROR macro, 9–1
introduction, 9–1
**CAM error-logging data structures**
introduction, 9–2
**CAM generic maximum transfer limit routine**, 4–8, C–79
**CAM identification macros**
described, 3–5t
**CAM locking macros**
described, 3–5t
**CAM programmer-defined routines**
introduction, 11–1
**CAM programmer-defined structures**
introduction, 11–1
samples, 11–11
**CAM routines**
cam_logger, C–2, 9–4
ccfg_action, 6–5
ccfg_attach, C–3, 6–5
ccfg_edtscan, C–4, 6–5
ccfg_slave, C–5, 6–5
ccmn_abort_ccb_bld, 3–12, C–9
ccmn_abort_que, 3–9, C–10

**CAM routines** (cont.)
ccmn_bdr_ccb_bld, 3–12, C–12
ccmn_br_ccb_bld, 3–12, C–14
ccmn_ccb_status, 3–13, C–15
ccmn_ccbwait, 3–15, C–17
ccmn_close_unit, 3–8, C–18
ccmn_DoSpecialCmd, 3–15, C–6
ccmn_errlog, 3–15, C–19
ccmn_gdev_ccb_bld, 3–11, C–21
ccmn_get_bp, 3–14, C–22
ccmn_get_ccb, 3–10, C–24
ccmn_get_dbuf, 3–14, C–25
ccmn_init, 3–8, C–26
ccmn_io_ccb_bld, 3–11, C–29
ccmn_mode_select, 3–13, C–31
ccmn_open_unit, 3–8, C–33
ccmn_pinq_ccb_bld, 3–11, C–36
ccmn_rel_bp, 3–14, C–37
ccmn_rel_ccb, 3–10, C–38
ccmn_rel_dbuf, 3–14, C–39
ccmn_rem_ccb, 3–9, C–40
ccmn_rsq_ccb_bld, 3–11, C–42
ccmn_sasy_ccb_bld, 3–11, C–44
ccmn_sdev_ccb_bld, 3–11, C–46
ccmn_send_ccb, 3–9, C–47
ccmn_start_unit, 3–13, C–49
ccmn_SysSpecialCmd, 3–15, C–7
ccmn_term_ccb_bld, 3–12, C–52
ccmn_term_que, 3–9, C–53
ccmn_tur, 3–13, C–55
cdbg_CamFunction, 10–4, C–57
cdbg_CamStatus, 10–4, C–58
cdbg_DumpABORT, 10–6, C–59
cdbg_DumpBuffer, 10–6, C–60
cdbg_DumpCCBHeader, 10–5, C–61
cdbg_DumpCCBHeaderFlags, 10–5, C–63
cdbg_DumpInquiryData, 10–6, C–64
cdbg_DumpPDRVws, 10–6, C–65
cdbg_DumpSCSIIO, 10–6, C–66
cdbg_DumpTERMIO, 10–6, C–67
cdbg_GetDeviceName, 10–6, C–68
cdbg_ScsiStatus, 10–5, C–69
cdbg_SystemStatus, 10–5, C–70
cgen_async, 4–7, C–71

**CAM routines** (cont.)
cgen_attach, 4–8, C–72
cgen_ccb_chkcond, 4–7, C–73
cgen_close, 4–5, C–75
cgen_done, 4–7, C–76
cgen_ioctl, 4–6, C–77
cgen_iodone, 4–7, C–78
cgen_minphys, 4–8, C–79
cgen_mode_sns, 4–9, C–80
cgen_open, 4–5, C–81
cgen_open_sel, 4–9, C–83
cgen_read, 4–5, C–84
cgen_ready, 4–8, C–85
cgen_slave, 4–8, C–86
cgen_strategy, 4–6, C–87
cgen_write, 4–6, C–88
SCSI/CAM special I/O interface, 12–1
sim_action, 8–2, C–89
sim_init, 8–2, C–90
uagt_close, 2–4, C–91
uagt_ioctl, 2–5, C–92
uagt_open, 2–4, C–94
xpt_action, C–95, 7–1
xpt_ccb_free, C–97, 7–1
xpt_init, C–98, 7–2

**CAM SIM callback handling**
description, 8–1

**CAM SIM routines**
introduction, 8–2

**CAM structures**
ABORT CCB, 5–6
BUS DEVICE RESET CCB, 5–6
BUS RESET CCB, 5–6
CAM Control Block (CCB) header structure, 5–2, 5–6
CAM Control Block structures, 5–1
CAM_ERR_ENTRY, 9–2
CAM_ERR_HDR, 9–3
CAM_PERIPHERAL_DRIVER, 6–3
CCB_ABORT, 5–6
CCB_GETDEV, 5–7
CCB_HEADER, 5–2
CCB_PATHINQ, 5–7
CCB_RELSIM, 5–5

**CAM structures** (cont.)
CCB_RESETDEV, 5–6
CCB_SCSIIO, 5–4
CCB_SETASYNC, 5–5
CCB_SETDEV, 5–7
CCFG_CTRL, 6–2
cd_address, 11–17
CDB_UN, 5–5
CDROM_PLAY_AUDIO and CDROM_PLAY_VAUDIO commands, 11–18
CDROM_PLAY_AUDIO_MSF and CDROM_PLAY_MSF commands, 11–18
CDROM_PLAY_AUDIO_TI command, 11–19
CDROM_PLAY_AUDIO_TR command, 11–20
CDROM_PLAYBACK_CONTROL and CDROM_PLAYBACK_STATUS commands, 11–27
CDROM_PLAYBACK_CONTROL command, 11–28
CDROM_PLAYBACK_STATUS command, 11–28
CDROM_PLAY_TRACK command, 11–27
CDROM_READ_HEADER command, 11–26
CDROM_READ_SUBCHANNEL command, 11–22
CDROM_TOC_ENTRYS command, 11–21
CDROM_TOC_HEADER command, 11–20
CGEN_ACTION, 4–3
CGEN_SPECIFIC, 4–2
Density Table Structure, 11–8
DENSITY_TBL, 3–4, 11–8
DEV_DESC, 11–5
Device Descriptor Structure, 11–5
DISK_SPECIFIC, 11–14
EDT, 6–2
GET DEVICE TYPE CCB, 5–7
MODESEL_TBL, 3–3, 11–9
PATH INQUIRY CCB, 5–7
PDRV_DEVICE, 3–2, 11–2
PDRV_WS, 3–4
Peripheral Device Unit Table, 3–1, 11–1, 11–2
RELEASE SIM QUEUE CCB, 5–5
SCSI I/O CCB, 5–4
**CAM structures** (cont.)
SCSI/CAM Special Command Table, 12–3
SCSI/CAM Special Command Table example, 12–7
SET ASYNCHRONOUS CALLBACK CCB, 5–5
SET DEVICE TYPE CCB, 5–7
Special I/O Argument Structure, 12–8
Special I/O Control Commands Structure, 12–16, 12–17
SPECIAL_HEADER, 12–3
TAPE_SPECIFIC, 11–11
TERMINATE I/O CCB, 5–6
UAGT_CAM_CCB, 2–2
UAGT_CAM_SCAN, 2–4
**CAM User Agent driver**
error handling, 2–1
introduction, 2–1
**CAM XPT routines**
introduction, 7–1
**CAM_ERROR macro (CAM)**
defined, 9–1
described, 9–1
**cam_logger (CAM)**, C–2, 9–4
**CCB_ABORT structure (CAM)**, 5–6
**CCB_GETDEV structure (CAM)**, 5–7
**CCB_HEADER structure (CAM)**, 5–2
**CCB_PATHINQ structure (CAM)**, 5–7
**CCB_RELSIM structure (CAM)**, 5–5
**CCB_RESETBUS structure (CAM)**, 5–6
**CCB_RESETDEV structure (CAM)**, 5–6
**CCB_SCSIIO structure (CAM)**, 5–4
**CCB_SETASYNC structure (CAM)**, 5–5
**CCB_SETDEV structure (CAM)**, 5–7
**CCB_TERMIO structure (CAM)**, 5–6
**ccfg_action (CAM)**, 6–5
**ccfg_attach (CAM)**, C–3, 6–5
**ccfg_edtscan (CAM)**, C–4, 6–5
**ccfg_slave (CAM)**, C–5, 6–5
**ccmn_abort_ccb_bld (CAM)**, 3–12, C–9
**ccmn_abort_que (CAM)**, 3–9, C–10
**ccmn_bdr_ccb_bld (CAM)**, 3–12, C–12
**ccmn_br_ccb_bld (CAM)**, 3–12, C–14
**ccmn_ccb_status (CAM)**, 3–13, C–15

**ccmn_ccbwait (CAM)**, 3–15, C–17
**ccmn_close_unit (CAM)**, 3–8, C–18
**ccmn_DoSpecialCmd (CAM)**, 3–15, C–6
**ccmn_errlog (CAM)**, 3–15, C–19
**ccmn_gdev_ccb_bld (CAM)**, 3–11, C–21
**ccmn_get_bp (CAM)**, 3–14, C–22
**ccmn_get_ccb (CAM)**, 3–10, C–24
**ccmn_get_dbuf (CAM)**, 3–14, C–25
**ccmn_init (CAM)**, 3–8, C–26
**ccmn_io_ccb_bld (CAM)**, 3–11, C–29
**ccmn_mode_select (CAM)**, 3–13, C–31
**ccmn_open_unit (CAM)**, 3–8, C–33
**ccmn_pinq_ccb_bld (CAM)**, 3–11, C–36
**ccmn_rel_bp (CAM)**, 3–14, C–37
**ccmn_rel_ccb (CAM)**, 3–10, C–38
**ccmn_rel_dbuf (CAM)**, 3–14, C–39
**ccmn_rem_ccb (CAM)**, 3–9, C–40
**ccmn_rsq_ccb_bld (CAM)**, 3–11, C–42
**ccmn_sasy_ccb_bld (CAM)**, 3–11, C–44
**ccmn_sdev_ccb_bld (CAM)**, 3–11, C–46
**ccmn_send_ccb (CAM)**, 3–9, C–47
**ccmn_start_unit (CAM)**, 3–13, C–49
**ccmn_SysSpecialCmd (CAM)**, 3–15, C–7
**ccmn_term_ccb_bld (CAM)**, 3–12, C–52
**ccmn_term_que (CAM)**, 3–9, C–53
**ccmn_tur (CAM)**, 3–13, C–55
**cdbg_CamFunction (CAM)**, 10–4, C–57
**cdbg_CamStatus (CAM)**, 10–4, C–58
**cdbg_DumpABORT (CAM)**, 10–6, C–59
**cdbg_DumpBuffer (CAM)**, 10–6, C–60
**cdbg_DumpCCBHeader (CAM)**, 10–5, C–61
**cdbg_DumpCCBHeaderFlags (CAM)**, 10–5, C–63
**cdbg_DumpInquiryData (CAM)**, 10–6, C–64
**cdbg_DumpPDRVws (CAM)**, 10–6, C–65
**cdbg_DumpSCSIIO (CAM)**, 10–6, C–66
**cdbg_DumpTERMIO (CAM)**, 10–6, C–67
**cdbg_GetDeviceName (CAM)**, 10–6, C–68
**cdbg_ScsiStatus (CAM)**, 10–5, C–69
**cdbg_SystemStatus (CAM)**, 10–5, C–70
**CDB_UN structure (CAM)**, 5–5
**CGEN_ACTION (CAM)**, 4–3
**cgen_async (CAM)**, 4–7, C–71
**cgen_attach (CAM)**, 4–8, C–72
**cgen_ccb_chkcond (CAM)**, 4–7, C–73
**cgen_close (CAM)**, 4–5, C–75
**cgen_done (CAM)**, 4–7, C–76
**cgen_ioctl (CAM)**, 4–6, C–77
**cgen_iodone (CAM)**, 4–7, C–78
**cgen_minphys (CAM)**, 4–8, C–79
**cgen_mode_sns (CAM)**, 4–9, C–80
**cgen_open (CAM)**, 4–5, C–81
**cgen_open_sel (CAM)**, 4–9, C–83
**cgen_read (CAM)**, 4–5, C–84
**cgen_ready (CAM)**, 4–8, C–85
**cgen_slave (CAM)**, 4–8, C–86
**CGEN_SPECIFIC (CAM)**, 4–2
**cgen_strategy (CAM)**, 4–6, C–87
**cgen_write (CAM)**, 4–6, C–88
**common abort CCB routine (CAM)**, 3–9, 3–12, C–9, C–10
**common bus-device-reset CCB routine (CAM)**, 3–12, C–12
**common bus-reset CCB routine (CAM)**, 3–12, C–14
**common close unit routine (CAM)**, 3–8, C–18
**common create SCSI I/O CCB for ccmn_mode_select command (CAM)**, 3–13, C–31
**common create SCSI I/O CCB for START UNIT command (CAM)**, 3–13, C–49
**common create SCSI I/O CCB for TEST UNIT READY command (CAM)**, 3–13, C–55
**common create SCSI I/O CCB routine (CAM)**, 3–11, C–29
**common data structures (CAM)**
introduction, 3–1
**common deallocate buf structure routine (CAM)**, 3–14, C–37
**common deallocate data buffer routine (CAM)**, 3–14, C–39
**common error logging routine (CAM)**, 3–15, C–19
**common get buf structure routine (CAM)**, 3–14, C–22
**common get CCB routine (CAM)**, 3–10, C–24
**common get data buffer routine (CAM)**, 3–14, C–25
**common get-device-type CCB routine (CAM)**, 3–11, C–21

**common initialization routine (CAM)**, 3–8, C–26
**common I/O CCB wait routine (CAM)**, 3–15, C–17
**common open unit routine (CAM)**, 3–8, C–33
*See also* common close unit routine (CAM)
**common path-inquiry CCB routine (CAM)**, 3–11, C–36
**common release CCB routine (CAM)**, 3–10, C–38
**common release-SIM-queue CCB routine (CAM)**, 3–11, C–42
**common remove CCB routine (CAM)**, 3–9, C–40
**common routine to assign generic status categories (CAM)**, 3–13, C–15
**common routines (CAM)**
introduction, 3–1
**common send CCB routine (CAM)**, 3–9, C–47
**common set-asynchronous-callback CCB routine (CAM)**, 3–11, C–44
**common set-device-type CCB routine (CAM)**, 3–11, C–46
**common special command interface routine (CAM)**, 3–15, C–6, C–7
**common terminate CCB routine (CAM)**, 3–9, C–53
**common terminate I/O CCB routine (CAM)**, 3–12, C–52
**Configuration driver (CAM)**
and XPT routines, 6–1
**Configuration driver configuraton file (CAM)**, 6–3
sample entry, 6–4
**Configuration driver control structure (CAM)**, 6–2
**Configuration driver data structures (CAM)**
CAM_PERIPHERAL_DRIVER, 6–3
CCFG_CTRL, 6–2
EDT, 6–2
introduction, 6–1
**Configuration driver routines**
entry-point routine introduction, 6–4
**Configuration driver routines (CAM)**
ccfg_action, 6–5
ccfg_attach, C–3, 6–5
ccfg_edtscan, C–4, 6–5
ccfg_slave, C–5, 6–5
description, 6–1
introduction, 6–1

## D

**debug macros (CAM)**
introduction, 10–1
**debug routines (CAM)**
introduction, 10–1
**Density Table Structure (CAM)**, 3–4
**Density Table Structure structure (CAM)**, 11–8
sample entry, 11–9
**DENSITY_TBL structure (CAM)**, 3–4, 11–8
**DEV_DESC structure (CAM)**, 11–5
**Device Descriptor Structure structure (CAM)**, 11–5
**device driver**
summary of device driver routines, B–1t
**DISK_SPECIFIC structure (CAM)**, 11–14

## E

**Error Entry Structure (CAM)**, 9–2
**error handling (CAM)**
CAM_ERROR macro, 9–1
introduction, 9–1
**Error Header Structure (CAM)**, 9–3
**error-logging data structures (CAM)**
CAM_ERR_ENTRY, 9–2
CAM_ERR_HDR, 9–3
introduction, 9–2

## G

**generic action data structure (CAM)**, 4–3
**generic asynchronous event handling routine (CAM)**, 4–7, C–71
**generic attach routine (CAM)**, 4–8, C–72
**generic close unit routine (CAM)**, 4–5, C–75
*See also* generic open unit routine (CAM)
**generic completion routine (CAM)**, 4–7, C–76
**generic data structures (CAM)**
introduction, 4–2
**generic I/O completion routine (CAM)**, 4–7, C–78
**generic ioctl command routine (CAM)**, 4–6, C–77
**generic open unit routine (CAM)**, 4–5, C–81
*See also* generic close unit routine (CAM)
**generic read routine (CAM)**, 4–5, C–84
*See also* generic write routine (CAM)

**generic routines (CAM)**
error handling, 4–2
implementing ioctl commands, 4–1
introduction, 4–1
kernel entry points, 4–2
rules, 4–1
**generic slave routine (CAM)**, 4–8, C–86
**generic strategy routine (CAM)**, 4–6, C–87
**generic write routine (CAM)**, 4–6, C–88
*See also* generic read routine (CAM)
**generic-specific data structure (CAM)**, 4–2
**GET DEVICE TYPE CCB (CAM)**, 5–7

## H

**header files**
header files Used by device drivers, A–1t
header files Used by SCSI/CAM device drivers, A–3t

## M

**Mode Select Table Structure (CAM)**, 3–3, 11–9
**Mode Select Table Structure structure (CAM)**
sample entry, 11–11
**MODESEL_TBL structure (CAM)**, 3–3, 11–9

## P

**PATH INQUIRY CCB (CAM)**, 5–7
**PDRV_DEVICE structure (CAM)**, 3–2, 11–2
**PDRV_WS structure (CAM)**, 3–4
**Peripheral Device Unit Table structure (CAM)**, 3–1, 11–1, 11–2
**PRINTD macro (CAM)**, 10–1
**programmer-defined routines (CAM)**
introduction, 11–1
**programmer-defined structures (CAM)**
introduction, 11–1
samples, 11–11

## R

**RELEASE SIM QUEUE CCB (CAM)**, 5–5
**routine to dump a CCB_ABORT (CAM)**, 10–6, C–59
**routine to dump a CCB_HEADER (CAM)**, 10–5, C–61
**routine to dump a CCB_SCSIIO (CAM)**, 10–6, C–66
**routine to dump a CCB_TERMIO (CAM)**, 10–6, C–67
**routine to dump a data buffer (CAM)**, 10–6, C–60
**routine to dump a PDRV_WS (CAM)**, 10–6, C–65
**routine to dump an ALL_INQ_DATA structure (CAM)**, 10–6, C–64
**routine to dump cam_flags from a CCB_HEADER (CAM)**, 10–5, C–63
**routine to dump the device type (CAM)**, 10–6, C–68
**routine to fill in an error log packet (CAM)**, C–2, 9–4
**routine to print CAM status codes (CAM)**, 10–4, C–58
**routine to print SCSI status codes (CAM)**, 10–5, C–69
**routine to print system error codes (CAM)**, 10–5, C–70
**routine to print XPT function codes (CAM)**, 10–4, C–57

## S

**SCSI CDROM/AUDIO device cd_address structure (CAM)**, 11–17
**SCSI CDROM/AUDIO device CDROM_PLAY_AUDIO and CDROM_PLAY_VAUDIO commands structure (CAM)**, 11–18
**SCSI CDROM/AUDIO device CDROM_PLAY_AUDIO_MSF and CDROM_PLAY_MSF commands structure (CAM)**, 11–18
**SCSI CDROM/AUDIO device CDROM_PLAY_AUDIO_TI command**

**structure (CAM)**
**SCSI CDROM/AUDIO device CDROM_PLAY_AUDIO_TI command structure (CAM)** (cont.)
Book Title (cont.)
11–19 (cont.)
(cont.)
(cont.) , 11–19
**SCSI CDROM/AUDIO device CDROM_PLAY_AUDIO_TR command structure (CAM)**, 11–20
**SCSI CDROM/AUDIO device CDROM_PLAYBACK_CONTROL and CDROM_PLAYBACK_STATUS commands structures (CAM)**, 11–27
**SCSI CDROM/AUDIO device CDROM_PLAYBACK_CONTROL command structure (CAM)**, 11–28
**SCSI CDROM/AUDIO device CDROM_PLAYBACK_STATUS command structure (CAM)**, 11–28
**SCSI CDROM/AUDIO device CDROM_PLAY_TRACK command structure (CAM)**, 11–27
**SCSI CDROM/AUDIO device CDROM_READ_HEADER command structures (CAM)**, 11–26
**SCSI CDROM/AUDIO device CDROM_READ_SUBCHANNEL command structure (CAM)**, 11–22
**SCSI CDROM/AUDIO device CDROM_TOC_ENTRYS command structures (CAM)**, 11–21
**SCSI CDROM/AUDIO device CDROM_TOC_HEADER command structure (CAM)**, 11–20
**SCSI CDROM/AUDIO device Track Address structure (CAM)**, 11–17
**SCSI device**
attaching, 4–8, C–72
closing, 2–4, 3–8, 4–5, C–18, C–75, C–91
opening, 2–4, 3–8, 4–5, C–33, C–81, C–94
reading, 4–5, C–84
writing, 4–6, C–88
**SCSI I/O CCB (CAM)**, 5–4
**SCSI/CAM peripheral driver configuration structure (CAM)**, 6–3
**SCSI/CAM peripheral driver configuration table (CAM)**
adding entries, 6–3
sample entry, 6–4
**SCSI/CAM Special Command Table (CAM)**, 12–3
entries, 12–5
**SCSI/CAM Special Command Table (CAM) example**, 12–7
**SCSI/CAM special I/O interface (CAM)**, 12–1
*See also* generic routines (CAM)
application program access, 12–1
command table entries, 12–5
command table example, 12–7
command tables, 12–3
control command, 12–16, 12–17
device driver access, 12–2
introduction, 12–1
I/O control command processing, 12–8
sample code, 12–20, 12–22
sample function, 12–14, 12–15, 12–19
SCSI/CAM Special Command Table, 12–3
SCSI/CAM Special Command Table entries, 12–5
SCSI/CAM Special Command Table example, 12–7
Special I/O Control Commands Structure, 12–16, 12–17
SPECIAL_HEADER, 12–3
**SET ASYNCHRONOUS CALLBACK CCB (CAM)**, 5–5
**SET DEVICE TYPE CCB (CAM)**, 5–7
**SIM action routine (CAM)**, 8–2, C–89
**SIM initialization routine (CAM)**, 8–2, C–90
**SIM routines (CAM)**
introduction, 8–1
**sim_action (CAM)**, 8–2, C–89
**sim_init (CAM)**, 8–2, C–90
**Special I/O Argument Structure (CAM)**, 12–8
**Special I/O Control Commands Structure (CAM)**, 12–16, 12–17
**SPECIAL_HEADER (CAM)**, 12–3

## T

**TAPE_SPECIFIC structure (CAM)**, 11–11
**TERMINATE I/O CCB (CAM)**, 5–6

## U

**UAGT_CAM_CCB (CAM)**, 2–2
**UAGT_CAM_SCAN (CAM)**, 2–4
**uagt_close (CAM)**, 2–4, C–91
**uagt_ioctl (CAM)**, 2–5, C–92
**uagt_open routine (CAM)**, 2–4, C–94
**USCA (CAM)**
common structures and routines, 1–4
Configuration driver structures and routines, 1–5
generic structures and routines, 1–5
overview, 1–1
SCSI CDROM/AUDIO device structures and commands, 1–5
SCSI disk device structures and routines, 1–5
SCSI tape device structures and routines, 1–5
SCSI/CAM peripheral drivers, 1–4
SCSI/CAM special I/O interface, 1–5
SIM SCSI Interface layer, 1–6
User Agent driver structures and routines, 1–3
XPT transport layer, 1–6
**User Agent close routine**
*See also* User Agent open routine
**User Agent close routine (CAM)**, 2–4, C–91
**User Agent driver (CAM)**
error handling, 2–1
introduction, 2–1
sample inquiry programs, 2–5
sample programs, 2–5
sample scanner programs, 2–15
**User Agent ioctl routine (CAM)**, 2–5, C–92
**User Agent open routine**
*See also* User Agent close routine

## X

**XPT free CCB routine (CAM)**, C–97, 7–1
**XPT initialization routine (CAM)**, C–98, 7–2
**XPT routines**
xpt_ccb_alloc, C–96, 7–1
**XPT routines (CAM)**
introduction, 7–1
**XPT routing routine (CAM)**, C–95, 7–1
**xpt_action (CAM)**, C–95, 7–1
**xpt_ccb_alloc**, C–96, 7–1
**xpt_ccb_free (CAM)**, C–97, 7–1
**xpt_init (CAM)**, C–98, 7–2

# How to Order Additional Documentation

## Technical Support

If you need help deciding which documentation best meets your needs, call 800-343-4040 before placing your electronic, telephone, or direct mail order.

## Electronic Orders

To place an order at the Electronic Store, dial 800-234-1998 using a 1200- or 2400-baud modem from anywhere in the USA, Canada, or Puerto Rico. If you need assistance using the Electronic Store, call 800-DIGITAL (800-344-4825).

## Telephone and Direct Mail Orders

| Your Location | Call | Contact |
|---|---|---|
| Continental USA, Alaska, or Hawaii | 800-DIGITAL | Digital Equipment Corporation<br>P.O. Box CS2008<br>Nashua, New Hampshire 03061 |
| Puerto Rico | 809-754-7575 | Local Digital Subsidiary |
| Canada | 800-267-6215 | Digital Equipment of Canada<br>Attn: DECdirect Operations KAO2/2<br>P.O. Box 13000<br>100 Herzberg Road<br>Kanata, Ontario, Canada K2K 2A6 |
| International | ———— | Local Digital subsidiary or approved distributor |
| Internal* | ———— | SSB Order Processing - WMO/E15<br>*or*<br>Software Supply Business<br>Digital Equipment Corporation<br>Westminster, Massachusetts 01473 |

* For internal orders, you must submit an Internal Software Order Form (EN-01740-07).

# Reader's Comments

**ULTRIX SCSI/CAM Architecture**
Guide to Writing Device Drivers for the
ULTRIX SCSI/CAM Architecture Interfaces
AA-PN5HA-TE

Please use this postage-paid form to comment on this manual. If you require a written reply to a software problem and are eligible to receive one under Software Performance Report (SPR) service, submit your comments on an SPR form.

Thank you for your assistance.

| **Please rate this manual:** | Excellent | Good | Fair | Poor |
|---|---|---|---|---|
| Accuracy (software works as manual says) | ☐ | ☐ | ☐ | ☐ |
| Completeness (enough information) | ☐ | ☐ | ☐ | ☐ |
| Clarity (easy to understand) | ☐ | ☐ | ☐ | ☐ |
| Organization (structure of subject matter) | ☐ | ☐ | ☐ | ☐ |
| Figures (useful) | ☐ | ☐ | ☐ | ☐ |
| Examples (useful) | ☐ | ☐ | ☐ | ☐ |
| Index (ability to find topic) | ☐ | ☐ | ☐ | ☐ |
| Page layout (easy to find information) | ☐ | ☐ | ☐ | ☐ |

What would you like to see more/less of? _____

_____

_____

What do you like best about this manual? _____

_____

_____

What do you like least about this manual? _____

_____

_____

Please list errors you have found in this manual:

| Page | Description |
|---|---|
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |

Additional comments or suggestions to improve this manual:

_____

_____

_____

_____

What version of the software described by this manual are you using? _____

Name/Title _____ Dept. _____

Company _____ Date _____

Mailing Address _____

_____ Email _____ Phone _____

Do Not Tear − Fold Here and Tape

digital™

NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

# BUSINESS REPLY MAIL

FIRST−CLASS MAIL PERMIT NO. 33 MAYNARD MA

POSTAGE WILL BE PAID BY ADDRESSEE

DIGITAL EQUIPMENT CORPORATION
OPEN SOFTWARE PUBLICATIONS MANAGER
ZKO3−3/Y32
110 SPIT BROOK ROAD
NASHUA NH 03062−2698

Do Not Tear − Fold Here

Cut
Along
Dotted
Line

# Reader's Comments

**ULTRIX SCSI/CAM Architecture**
Guide to Writing Device Drivers for the
ULTRIX SCSI/CAM Architecture Interfaces
AA-PN5HA-TE

---

Please use this postage-paid form to comment on this manual. If you require a written reply to a software problem and are eligible to receive one under Software Performance Report (SPR) service, submit your comments on an SPR form.

Thank you for your assistance.

| **Please rate this manual:** | Excellent | Good | Fair | Poor |
|---|---|---|---|---|
| Accuracy (software works as manual says) | ☐ | ☐ | ☐ | ☐ |
| Completeness (enough information) | ☐ | ☐ | ☐ | ☐ |
| Clarity (easy to understand) | ☐ | ☐ | ☐ | ☐ |
| Organization (structure of subject matter) | ☐ | ☐ | ☐ | ☐ |
| Figures (useful) | ☐ | ☐ | ☐ | ☐ |
| Examples (useful) | ☐ | ☐ | ☐ | ☐ |
| Index (ability to find topic) | ☐ | ☐ | ☐ | ☐ |
| Page layout (easy to find information) | ☐ | ☐ | ☐ | ☐ |

What would you like to see more/less of? _____

_____

_____

What do you like best about this manual? _____

_____

_____

What do you like least about this manual? _____

_____

_____

Please list errors you have found in this manual:

| Page | Description |
|---|---|
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |

Additional comments or suggestions to improve this manual:

_____

_____

_____

_____

What version of the software described by this manual are you using? _____

Name/Title _____ Dept. _____

Company _____ Date _____

Mailing Address _____

_____ Email _____ Phone _____

Do Not Tear − Fold Here and Tape

digital™

NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

# BUSINESS REPLY MAIL

FIRST−CLASS MAIL PERMIT NO. 33 MAYNARD MA

POSTAGE WILL BE PAID BY ADDRESSEE

DIGITAL EQUIPMENT CORPORATION
OPEN SOFTWARE PUBLICATIONS MANAGER
ZKO3−3/Y32
110 SPIT BROOK ROAD
NASHUA NH 03062−2698

Do Not Tear − Fold Here

Cut
Along
Dotted
Line